



# FLUORESCENT LIGHTS

## FFL-24-54-T5HO-SERIES

### SPECIFICATIONS

**CONSTRUCTION-FFL-24-T5HO:** Extruded aluminum floodlight with adjustable cast aluminum swivel

**REFLECTOR:** Highly polished specular aluminum

**LENS:** High-impact clear acrylic



**BALLAST:** 120/230/277 volt, Type 1 Outdoor, high-frequency electronic

**WIRING:** Standard 120 volt, black, white and ground

**MOUNTING:** None supplied, FA-26 Pedestal recommended. See Mounting section

**FINISH:** Black texture polyester powder coat, optional powder coat finish available

For 2 lamp units, add **-2L** to catalog number

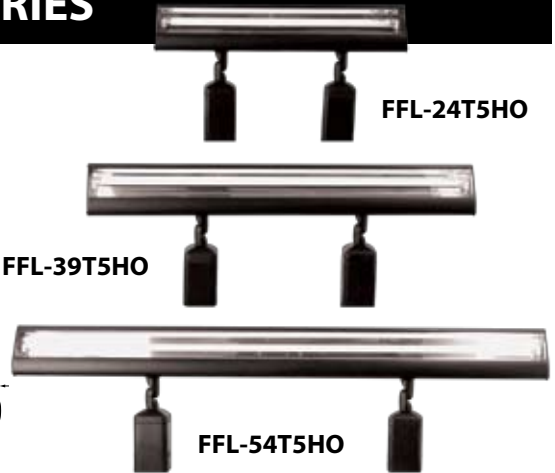


### ORDERING INFORMATION

CATALOG NO.	DESCRIPTION	WATTAGE	LAMP SUPPLIED	STANDARD FINISH	EST. SHIP. WEIGHT
<b>FFL-24-T5HO-30K</b>	24" extruded aluminum floodlight, 120v.	24w	1 x 24 watt (30°K)	Black texture	4.0 lbs.
<b>FFL-24-T5HO-35K</b>	24" extruded aluminum floodlight, 120v.	24w	1 x 24 watt (35°K)	Black texture	4.0 lbs.
<b>FFL-24-T5HO-41K</b>	24" extruded aluminum floodlight, 120v.	24w	1 x 24 watt (41°K)	Black texture	4.0 lbs.
<b>FFL-24-T5HO-50K</b>	24" extruded aluminum floodlight, 120v.	24w	1 x 24 watt (50°K)	Black texture	4.0 lbs.
<b>FFL-39-T5HO-30K</b>	35" extruded aluminum floodlight, 120v.	39w	1 x 39 watt (30°K)	Black texture	8.0 lbs.
<b>FFL-39-T5HO-35K</b>	35" extruded aluminum floodlight, 120v.	39w	1 x 39 watt (35°K)	Black texture	8.0 lbs.
<b>FFL-39-T5HO-41K</b>	35" extruded aluminum floodlight, 120v.	39w	1 x 39 watt (41°K)	Black texture	8.0 lbs.
<b>FFL-39-T5HO-50K</b>	35" extruded aluminum floodlight, 120v.	39w	1 x 39 watt (50°K)	Black texture	8.0 lbs.
<b>FFL-54-T5HO-30K</b>	47" extruded aluminum floodlight, 120v.	54w	1 x 54 watt (30°K)	Black texture	13.0 lbs.
<b>FFL-54-T5HO-35K</b>	47" extruded aluminum floodlight, 120v.	54w	1 x 54 watt (35°K)	Black texture	13.0 lbs.
<b>FFL-54-T5HO-41K</b>	47" extruded aluminum floodlight, 120v.	54w	1 x 54 watt (41°K)	Black texture	13.0 lbs.
<b>FFL-54-T5HO-50K</b>	47" extruded aluminum floodlight, 120v.	54w	1 x 54 watt (50°K)	Black texture	13.0 lbs.



### MOUNTING ACCESSORIES

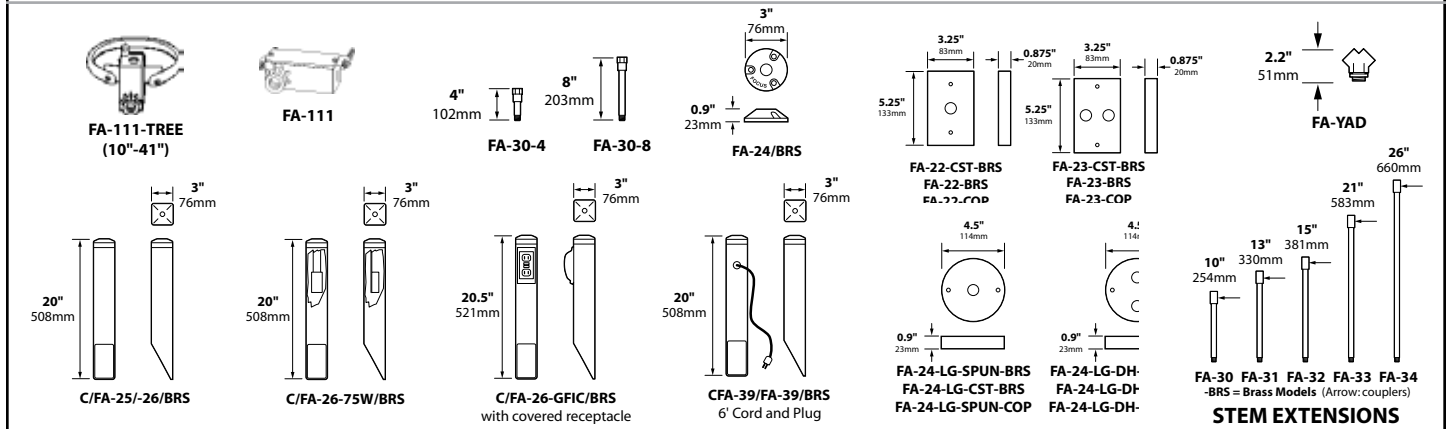

### BEAM/GLARE CONTROL ACCESSORIES

**FA-06-5, 7** 1/4" Mini Hex Cell Louver for FFL-5, 7

**FA-09-5, 7-BLUE** Blue Plastic Gel for FFL-5, 7

**FA-09-5, 7-GREEN** Green Plastic Gel for FFL-5, 7

**FA-06-9, 13** 1/4" Mini Hex Cell Louver for FFL-13

**FA-09-9, 13-BLUE** Blue Plastic Gel for FFL-13

**FA-09-9, 13-GREEN** Green Plastic Gel for FFL-13

**FA-06-26** 1/4" Mini Hex Cell Louver for FFL-26

**FA-09-26-BLUE** Blue Plastic Gel for FFL-26

**FA-09-26-GREEN** Green Plastic Gel for FFL-26

**FA-26** Commercial Mounting Pedestal; see "Mounting


Devices" section for complete details

**FA-26-R** Commercial Mounting Pedestal with receptacle

**FA-39** Commercial Mounting Pedestal with 6 ft. power cord

**-HE** Hood Extension

FSA-00



### JOB INFORMATION

Type:	Date:
Job Name:	
Cat. No.:	
Lamp(s):	
Specifier:	
Contractor:	
Notes:	


**FOCUS INDUSTRIES INC.**  
25301 COMMERCENTRE DRIVE  
LAKE FOREST, CA 92630

[www.focusindustries.com](http://www.focusindustries.com)  
sales@focusindustries.com  
(949) 830-1350 • FAX (949) 830-3390


Powder Coat Finishes	Black Texture (Standard)	Antique Verde	Bronze Texture	Camel	White Texture	Hunter Texture	Rust	Weathered Iron	Weathered Brown	Stucco	Rubbed Verde	Chrome Powder	Terra Cotta
Ordering Code	<b>-BLT</b>	<b>-ATV</b>	<b>-BRT</b>	<b>-CAM</b>	<b>-WTX</b>	<b>-HTX</b>	<b>-RST</b>	<b>-WIR</b>	<b>-WBR</b>	<b>-STU</b>	<b>-RBV</b>	<b>-CPR</b>	<b>-TRC</b>




## LIGHT DISTRIBUTIONS AND PHOTOMETRICS

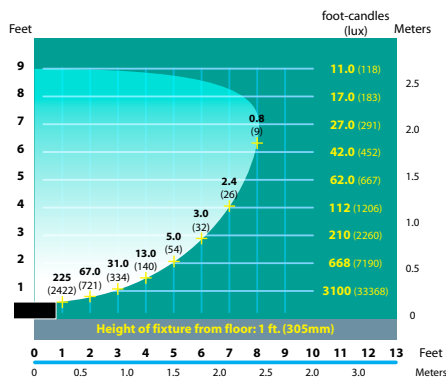


FFL-24T5HO Half Spread Photometrics

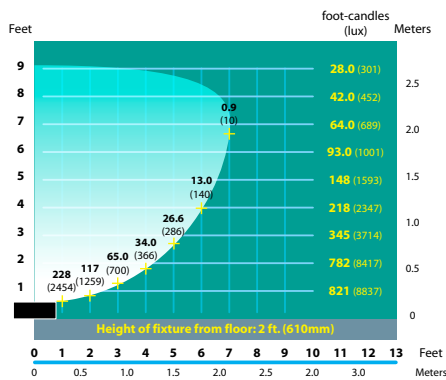


FFL-24T5HO Half Spread Photometrics

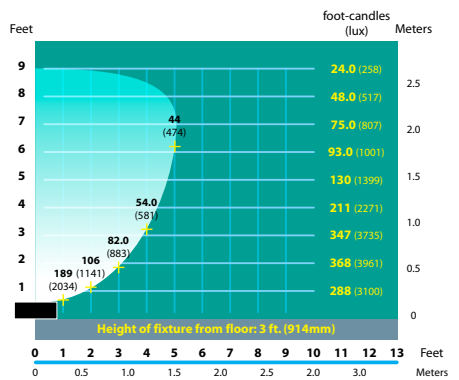


FFL-24T5HO Half Spread Photometrics

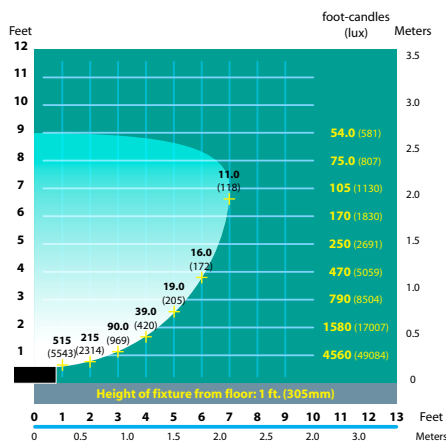


FFL-39T5HO Half Spread Photometrics

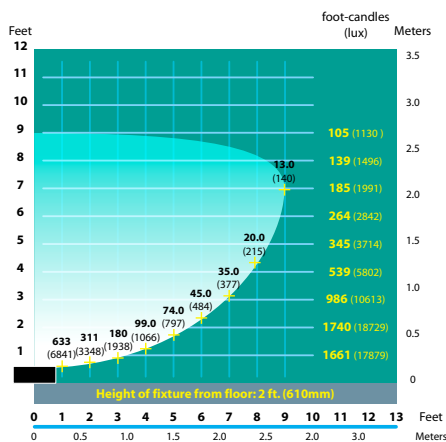


FFL-39T5HO Half Spread Photometrics

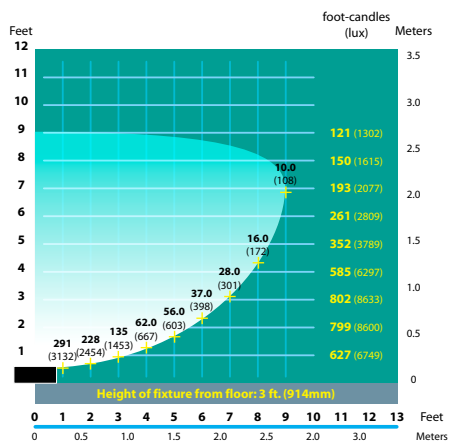


FFL-39T5HO Half Spread Photometrics

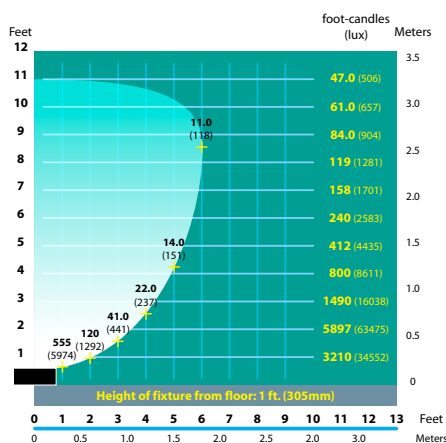

FFL-54T5HO Half Spread Photometrics

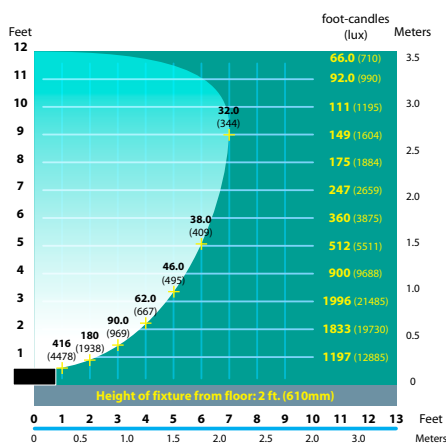

FFL-54T5HO Half Spread Photometrics

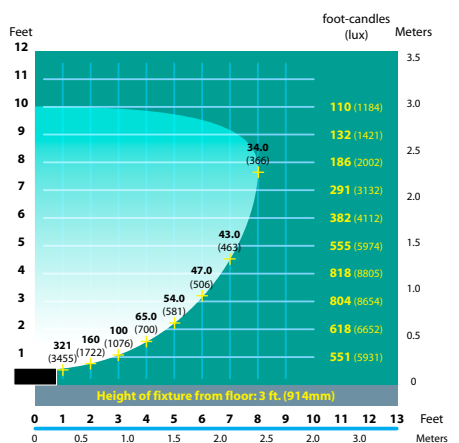

FFL-54T5HO Half Spread Photometrics




**FOCUS**<sup>™</sup>  
INDUSTRIES

## INSTALLATION INSTRUCTIONS

### Compact Fluorescent Flood Lights (120v. and 277v.)

Inspected by

1. Make sure electrical supply power is shut off at circuit breaker before starting fixture installation or servicing of fixture.
2. Using thread sealant, thread fixture onto junction box or other mounting device (not supplied) until it is at desired direction. Tighten provided lock nut to ensure that the fixture is firmly locked to adjusted position.
3. Attach fixture leads to line in leads observing polarity (black to black, white to white and green to ground) using approved silicone-filled safety wire connectors.
4. Attach junction box cover plate to junction box (not supplied). Make sure that wires are not pinched between junction box cover and junction box and gasket seats flush.
5. Coat exposed fixture threads with thread sealant to prevent moisture from entering junction box or other mounting device.
6. To adjust fixture aiming angle, loosen swivel screw. **Do not remove completely.** Hold fixture at selected angle and tighten swivel screw firmly with #2 Phillips screw driver.
7. Turn on power to the fixture and check for proper operation.

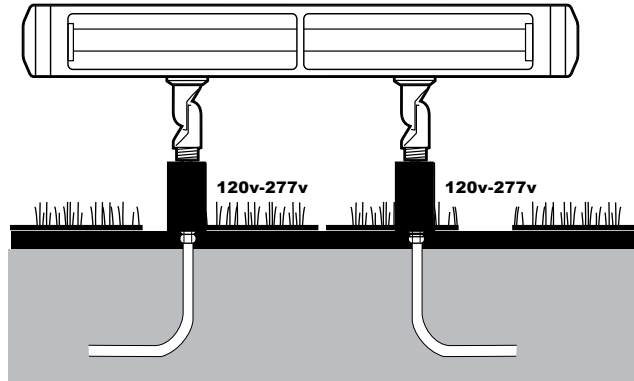

#### LAMP INSTALLATION/REPLACEMENT:

**CAUTION: Do not exceed maximum wattage marked on fixture label.**

1. To prevent electrical shock, turn off electrical power supply before servicing.
2. Remove 2 side plate screws and pivot side plate.
3. Slide lens outward to expose lamp.
4. Replace lamp with correct wattage and type marked on fixture label.
5. Re-install replace front lens & side plate screws.

**NOTE: Must be installed by a licensed electrician per local codes.**  
**For Questions Call 1-888-882-1350**

For question call 1-800-882-1350