



Description

Non-IC rated remodel housing for applications where the back side of the ceiling is not accessible

- Designed to be installed in non-insulated areas, or where insulation is spaced at least 3" from housing

Listings UL Listed, C-UL/CSA certified for through-branch wiring, damp and wet locations

- Wet location listed with trims 11, 12, 4101, 4102 and 4181
- Wet location listed with trims 14 and 17 with PAR20 outdoor rated lamps
- Conforms with City of Chicago IP requirements

Features

- 4" Remodel housing
- Detachable medium base porcelain socket with nickel-plated copper screw shell
- Remodel springs accommodate up to a 1 1/8" ceiling thickness
- Steel housing is fully assembled for ease of installation
- Pre-wired junction box with (5) 1/2" knockouts with pryout slots, (4) non-metallic sheathed cable connectors, and ground wire
- Shadow-free, knife-edge trim design blends smoothly into the ceiling and allows architectural continuity with Aculux® trims
- UL Listed, C-UL/CSA certified for through-branch wiring, maximum (4) #12 AWG minimum 90° C branch circuit conductors (2 in, 2 out)
- Thermally protected against improper use of lamps or insulation
- Lamp wattage ratings and apertures based on trim selection on pages 39-41


Ordering Information

Catalog Number: **TC1R**

Accessories

Catalog Number	Description
SMPLT-4	Galvanized steel plate for locating remodel style housings in new construction. Screw/nail holes for full coverage between 16" and 24" joists.
GU10-WHIP	Medium base to GU10 base flexible socket adapter. Use with 10, 440, 445, 446 & 448 trims only.

Dimensions

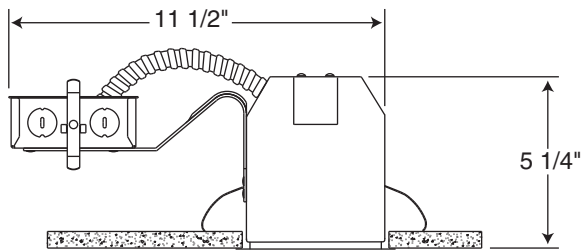

4 3/8" Ceiling Cutout

