



## Description

Non-IC rated remodel housing for applications where the back side of the ceiling is not accessible

- Designed to be installed in non-insulated areas, or where insulation is spaced at least 3" from housing

## Listings

UL Listed, C-UL/CSA certified for through-branch wiring, damp and wet locations • Wet location listed with the 210, 211, and 212 trims • Wet location listed with trims 215 and 216 when used with PAR30 outdoor rated lamps • Conforms with City of Chicago IP requirements

## Ordering Information

Catalog Number: **TC20R**



## Features

- 5" Remodel housing
- Medium base porcelain socket with nickel-plated copper screw shell
- Drop socket with spring to accommodate various trim installations
- Remodel springs accommodate up to a 1 1/8" ceiling thickness
- Housing is fully assembled for ease of installation
- Pre-wired junction box with (5) 1/2" knockouts with pryout slots, (4) non-metallic sheathed cable connectors, and ground wire
- Shadow-free, knife-edge trim design blends smoothly into the ceiling and allows architectural continuity with Aculux® trims
- UL Listed, C-UL/CSA certified for through-branch wiring, maximum (4) #12 AWG branch circuit conductors (2 in, 2 out)
- Thermally protected against improper use of lamps or insulation
- Lamp wattage ratings and apertures based on trim selection on pages 63-65

## Accessories

Catalog Number	Description
<b>SMPLT-5</b>	Galvanized steel plate for locating remodel style housings in new construction. Screw/nail holes for full coverage between 16" and 24" joists.

## Dimensions

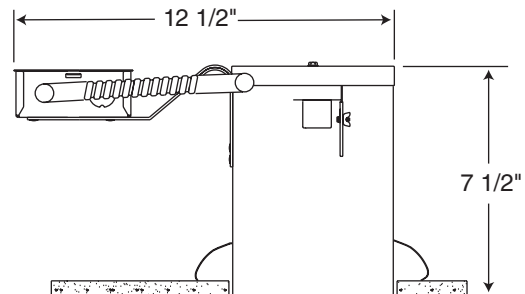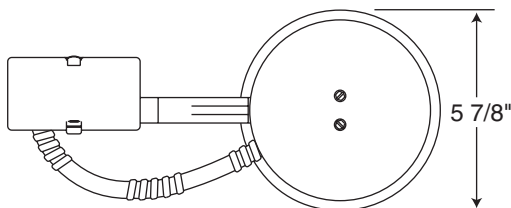

**5 1/2" Ceiling Cutout**