




# DIRECTIONAL LIGHTS DL-17-SERIES

## SPECIFICATIONS


- CONSTRUCTION-DL-17-BRS:** Cast brass Bullet; adjustable cast brass swivel  
**DL-17-COP:** Copper Bullet; adjustable cast brass swivel  
**DL-17:** Cast aluminum Bullet; adjustable cast aluminum swivel
- LENS:** Convex high-impact clear tempered glass for brass (-BRS models) or flat tempered glass for aluminum and copper (-COP) models
- LAMP SUPPLIED:** 20 watt MR11 FL (FTD); 2000 hours average rating (35w max.)
- SOCKET:** High temperature ceramic (GZ4) bi-pin, 250°C silicone lead wires
- WIRING:** Black 3 foot 18/2 zip cord from base of fixture (12v. only)
- CONNECTION:** FA-05 Quick Connector (not supplied) from fixture to main cable (12/2, 10/2 or 8/2 only) 12v. only
- MOUNTING:** FA-03 9" ABS stake threaded 1/2" NPS
- FINISHES:** Optional finishes available  
**DL-17-BRS:** Unfinished brass  
**DL-17-COP:** Unfinished copper  
**DL-17:** Black texture

## ORDERING INFORMATION


CATALOG NO.	DESCRIPTION	EST. SHIP. WEIGHT
DL-17	2" MR11 Mini Bullet Aluminum	2.0 lbs.
DL-17-BRS	2" MR11 Mini Bullet Brass	2.0 lbs.
DL-17-COP	2" MR11 Mini Bullet Copper	2.0 lbs.



DL-17



DL-17-COP

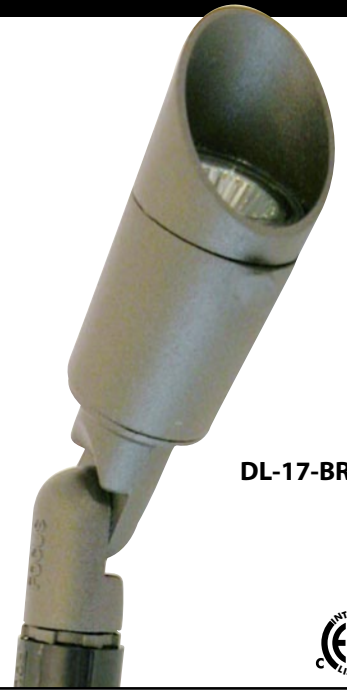

DL-17-BRT



## MOUNTING ACCESSORIES

**FA-01-BRS** 15" 381mm

**FA-03-BRS** 1.63" 41mm, 2" 51mm, 8.75" 222mm

**FA-03-LG** 3" 76mm, 8.875" 225mm

**FA-05** 1.15" 29mm, 0.8" 20mm

**FA-22-BRS** 3.25" 83mm, 5.25" 133mm

**FA-22-COP** 0.875" 20mm, 4.6" 117mm

**FA-22** 2.9" 74mm, 0.6" 15mm

**FA-24-BRS** 3" 76mm, 0.9" 23mm

**FA-24-TREE** 4.5" 114mm

**FA-24-LG-BRS** 0.9" 23mm

**FA-24-LG-COP** 0.9" 23mm

**FA-111** 2.2" 51mm

**FA-111-TREE (10"-41")** 10" 254mm

**FA-22-TREE (10"-41")** 10" 254mm

**FA-30-4** 4" 102mm

**FA-30-8** 8" 203mm

**FA-26** 3" 76mm

**FA-25** 3" 76mm

**FA-26-GFIC/BRS** 3" 76mm

**CFA-39/FA-39/BRS** 3" 76mm, 6' Cord and Plug

**FA-30** 10" 254mm

**FA-31** 13" 330mm

**FA-32** 15" 381mm

**FA-33** 21" 533mm

**FA-34** 26" 660mm

**STEM EXTENSIONS**

## BEAM/GLARE CONTROL ACCESSORIES

**FA-08-17** Round 1/8" Hex Cell Louver

**FA-10-17-BLUE** Blue Tempered Glass Lens


**FA-10-17-GREEN** Green Tempered Glass Lens

**FA-98-17** Linear Spread Tempered Glass Lens

**FA-99-17** Convex Tempered Glass Lens

**FA-104-17** Wide Spread Tempered Glass Lens Softener

## LIGHT DISTRIBUTIONS AND PHOTOMETRICS

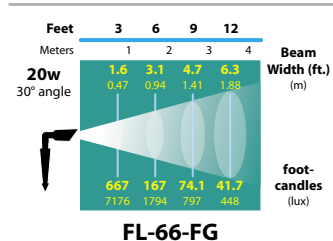

**12v. fixtures:** 25 foot 16/2 fixture lead wire available; add **-25F** to catalog number. For use with Focus CPC or hub supplied by others.

## JOB INFORMATION

Type: \_\_\_\_\_ Date: \_\_\_\_\_

Job Name: \_\_\_\_\_

Cat. No.: \_\_\_\_\_

Lamp(s): \_\_\_\_\_

Specifier: \_\_\_\_\_

Contractor: \_\_\_\_\_

Notes: \_\_\_\_\_

**FOCUS INDUSTRIES INC.**  
 25301 COMMERCENTRE DRIVE  
 LAKE FOREST, CA 92630

[www.focusindustries.com](http://www.focusindustries.com)  
 sales@focusindustries.com  
 (949) 830-1350 • FAX (949) 830-3390

Powder Coat Finishes	Black Texture (Standard)	Antique Verde	Bronze Texture	Camel	White Texture	Hunter Texture	Rust	Weathered Iron	Weathered Brown	Stucco	Rubbed Verde	Chrome Powder	Terra Cotta
Ordering Code	-BLT	-ATV	-BRT	-CAM	-WTX	-HTX	-RST	-WIR	-WBR	-STU	-RBV	-CPR	-TRC




**FOCUS**  
INDUSTRIES

**INSTALLATION INSTRUCTIONS (12V)**  
FOR ALL 12V DIRECTIONAL FIXTURES

Inspected by

- 1) Thread Mounting device onto base of fixture. If using FA-03, press into ground & connect to main cable using FA-05 Quick Connector. (See Instructions). If using FA-02 or -04 same as above. If using FA-01, make sure the base PVC is free of dirt/debris to allow the inner tube to be adjusted as needed. A set screw is provided to set desired height. If using FA-25, you must dig a 10-12" dia. hole, 12-16" deep. Loop main cable into stake or run fixture wire out of bottom to main cable, make connection with FA-05 then back fill hole & wiring. If using FA-22, -23, -24, -24-LG canopies, secure with appropriate screws for mounting surface.
- 2) To re-lamp DL-01, 2, 2EC, 13, remove 2 Phillips head screws from lens cap. Pull MR-16 lamp out by the glass reflector, NOT center bulb. Insert/press new MR16 into socket. Carefully assemble lens cap & gasket on body aligning locator pin on cap with locator hole on body. Before tightening screws on cap, make sure gasket seats between body & cap. No gaps or holes. This will insure a weatherproof seal. DL-13, DL-20-MR16 have no gaskets. They have a slip fit & only one set screw for removal. Center lamp & align drain hole before tightening.
- 3) To re-lamp DL-03, twist retaining ring & removing, releasing the lamp. Disconnect terminal connectors from back of PAR36 bulb. Reverse procedure to install light bulb. DL-03 is supplied with light bulb installed.
- 4) To re-lamp DL-04,-H remove 2 Phillips head screws on left end plate. Rotate end plate down. Slide lens out. For S-8 lamp press and rotate counter clockwise, lamp will release. For T-3 or T-4 hologen, pull light bulb away from socket ot release. To lamp you must align pins with socket for proper contact. The above fixtures are supplied with lamp installed & tested.
- 5) To re-lamp DL-05, press & rotate ALR12 lamp counter clockwise to release. It is recommended to lubricate lamp base w/petroleum jelly.
- 6) To re-lamp DL-06-NL, same as above but light bulbs will be ALR-12, ALR-18, or AR-70. Use same procedure as above. Lamp NOT installed.
- 7) To re-lamp DL-07, 8, 9, 11, 12, remove 2 Phillips head screws that retains clear lens. For S-8 lamp, press & rotate lamp counter clockwise. Lamp will release. For T-3 halogen pull light bulb away from socket to release. Above fixtures have lamp installed.
- 8) To re-lamp DL-21, loosen slotted set screw on bottom of cap. Hold body & cap with each hand. Pull & rotate to separate. Follow DL-01 re-lamping procedures above. Note ALL MR-16 fixtures are supplied in separate boxes to avoid damage in shipping. Bulbs are NOT installed.

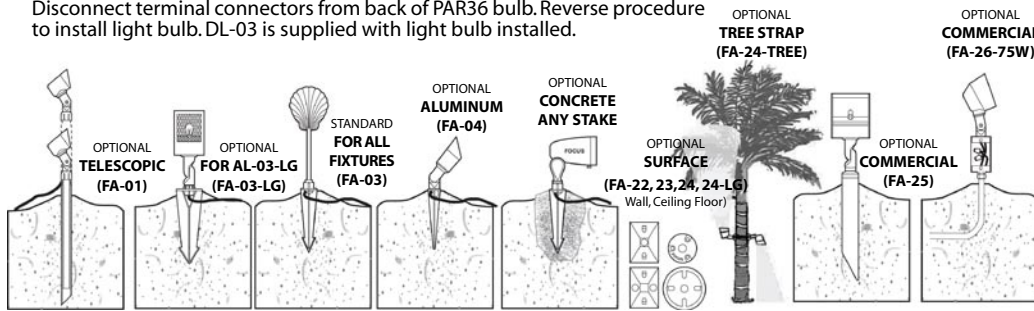

NOTE: All mounting stakes can be pressed or hammered into the ground with a standard hammer or rubber mallet. A small block of wood is recommended to give you a larger surface to pound. Always leave the top 1" section of the stake above ground to help isolate the metal from potentially corrosive soils. Fixture wire (18/2) should be buried underground to prevent detachment & have a cleaner look. For a more permanent mount, you can set the stake in concrete or use FA-25 commercial mounting pedestal.

**IMPORTANT SAFETY INSTRUCTIONS TO REDUCE THE RISK OF FIRE AND INJURY TO PERSONS:**

- 1) Lamp gets hot quickly; turn off/unplug/disconnect and allow to cool down before replacing the bulb.
- 2) DO NOT touch hot lens, guard or enclosure
- 3) DO NOT look into lamp when on
- 4) Keep lamp away from materials that may burn
- 5) Use only with wattage/lamp marked on fixture warning or instructions.
- 6) Use right light bulb base w/right socket
- 7) DO NOT touch the lamp at any time. Use a lint-free cloth when handling bulb as oil from skin may damage lamp and shorten lamp life.
- 8) DO NOT operate fixture with missing/damaged shield.

For Questions Call 1-888-882-1350