



OPEN CEILING LIGHTS DL-22-CWM-SERIES

SPECIFICATIONS

CONSTRUCTION—Copper Bullet; adjustable cast brass swivel; Copper Baseplate

LENS: Clear tempered glass with high temperature silicone O-ring gasket. Brass, copper and stainless steel models have convex glass lens

LAMP SUPPLIED: 20 watt MR16 FL (BAB) 5000 hours average rating

SOCKET: High temperature ceramic GU5.3 bi-pin with 250°C silicone lead wires

WIRING: Black 3 foot 18/2 zip cord from base of fixture (12v. only)

CONNECTION: FA-05 Quick Connector (not supplied) from fixture to main cable (12/2, 10/2 or 8/2 only) 12v. only

FINISH: Optional finishes available



We recommend the MR16 Ultra 10,000 hour halogen bulb.





DL-22FC-CWM-COP

ORDERING INFORMATION


CATALOG NO.	DESCRIPTION	MAX. WATTAGE	STANDARD FINISH	EST. SHIP. WEIGHT
DL-22-CWM-COP	Copper Bullet with Angle Cap	35w	Unfinished copper	2.0 lbs.
DL-22FC-CWM-COP	Copper Bullet with Flat Cap	35w	Unfinished copper	2.0 lbs.

LIGHT DISTRIBUTIONS AND PHOTOMETRICS

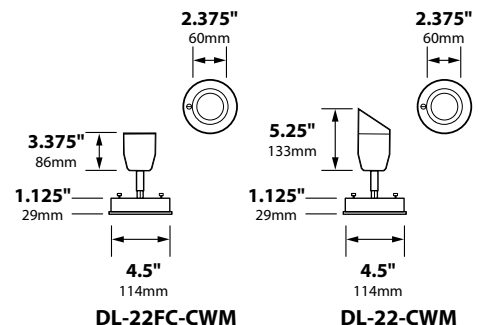

BEAM/GLARE CONTROL ACCESSORIES

FA-08-21	Round 1/8" Hex Cell Louver
FA-11-BLUE	Blue Tempered Glass Lens
FA-11-GREEN	Green Tempered Glass Lens
FA-98	Linear Spread Tempered Glass Lens
FA-99	Clear Tempered Tempered Glass Lens
FA-104	Wide Spread Tempered Glass Lens Softener

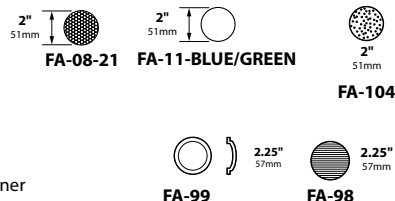

12v. fixtures: 25 foot 16/2 fixture lead wire available; add -25F to catalog number. For use with Focus CPC or hub supplied by others.

FSA-00

Powder Coat Finishes	Black Texture (Standard)	Antique Verde	Bronze Texture	Camel	White Texture	Hunter Texture	Rust	Weathered Iron	Weathered Brown	Stucco	Rubbed Verde	Chrome Powder	Terra Cotta
Ordering Code	-BLT	-ATV	-BRT	-CAM	-WTX	-HTX	-RST	-WIR	-WBR	-STU	-RBV	-CPR	-TRC



JOB INFORMATION

Type:	Date:
Job Name:	
Cat. No.:	
Lamp(s):	
Specifier:	
Contractor:	
Notes:	

FOCUS INDUSTRIES INC.
25301 COMMERCE DRIVE
LAKE FOREST, CA 92630

www.focusindustries.com
sales@focusindustries.com
(949) 830-1350 • FAX (949) 830-3390



FOCUS™
INDUSTRIES

INSTALLATION INSTRUCTONS FOR SURFACE DIRECTIONAL AND WALL MOUNT LIGHT FIXTURES (12v)


Inspected by

1. Attach mounting plate to surface using 3 screws provided.
- NOTE:** Mounting pegs should be aligned vertically.
2. Wire to 12v power source and attach wall bracket to mounting plate with thumb screws provided.
3. Check for proper installation.

LAMP INSTALLATION/REPLACEMENT

CAUTION: Do not exceed maximum wattage marked on fixture label.

1. Turn off power to fixture.
2. Loosen on side side of cap and remove cap.
3. Push lamp into socket while turning counter clockwise to remove lamp.
4. To re-install: Push lamp in and turn clock wise.
5. Re-install cover and tighten side screws.
6. Turn on power to check for proper operation.

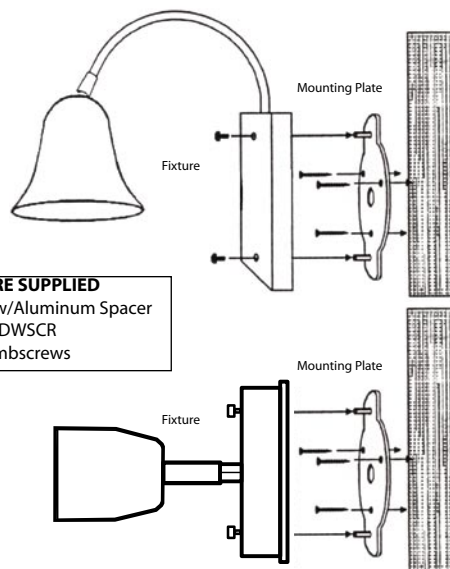

**NOTE: Must be installed by a licensed electrician per local codes
For Questions Call 1-888-882-1350**