



FLEX LIGHTS FPL-04-SERIES

SPECIFICATIONS

CONSTRUCTION-FPL-04: Spun aluminum tulip only mounted to 36" stainless steel flex arm, chrome plated with polyolefin shrink cover

LAMP: 18 watt S-8 #1141; 1200 hours average rating (25w max.)

SOCKET: Brass Nickel plated screw shell with ceramic contact and stainless steel spring for S.C. light bulb, 200°C silicone lead wires (Ba15s)

Wiring: Black 3 foot 18/2 zip cord from base of fixture (12v. only); FA-05 Quick Connector (not supplied) from fixture


CONNECTION: FA-05 Quick Connector (not supplied) from fixture base to main cable (12/2, 10/2 or 8/2 only) 12v. only

MOUNTING: FA-03 black 9" ABS stake, tapped 1/2" NPS



FINISH: Unfinished brass—optional finishes available



We recommend either the Xenon or Halogen 10,000 hour bulb.

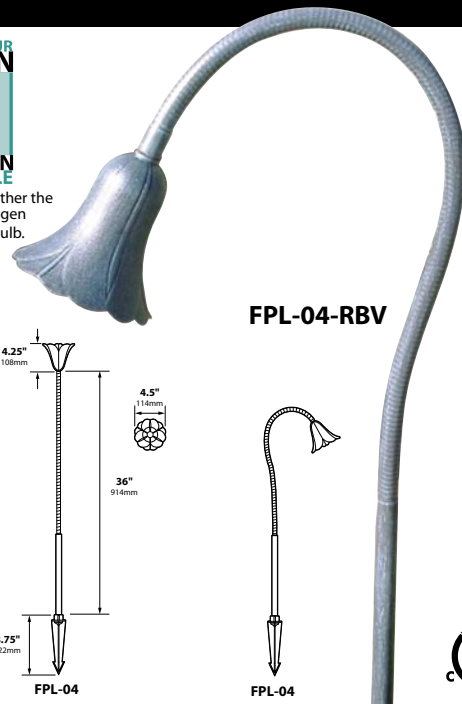

FPL-04-RBV

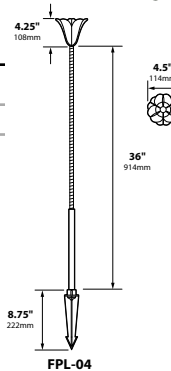

ORDERING INFORMATION

CATALOG NO.	DESCRIPTION	EST. SHIP. WEIGHT
FPL-04	4.5" dia. heavy-duty spun aluminum Bell	2.0 lbs.
FPL-04-BRS	4.5" dia. heavy-duty spun brass Bell	2.0 lbs.

MOUNTING ACCESSORIES

FA-01/BRS: 15" 381mm

FA-03/BRS: 8.75" 222mm

FA-03-LG: 8.875" 225mm

FA-05: 1.45" 37mm, 1.15" 29mm, 0.8" 20mm

FA-22-BRS: 3.25" 83mm, 5.25" 133mm

FA-22-COP: 0.875" 20mm

FA-22: 2.9" 74mm, 4.6" 117mm, 0.6" 15mm

FA-24/BRS: 3" 76mm, 0.9" 23mm

FA-24-LG-BRS: 4.5" 114mm, 0.9" 23mm

FA-24-LG-COP: 4.5" 114mm

FA-24-LG: 4.5" 114mm

FA-30-4: 4" 102mm

FA-30-8: 8" 203mm

FA-30: 10" 254mm

FA-31: 13" 330mm


FA-32: 15" 381mm

FA-33: 21" 533mm

FA-34: 26" 660mm

STEM EXTENSIONS: -BRS = Brass Models (Arrow: couplers)

LIGHT DISTRIBUTIONS AND PHOTOMETRICS



FPL-04
Half Spread Photometrics
8 ft. (2.4m) diameter

JOB INFORMATION

Type: _____ Date: _____

Job Name: _____

Cat. No.: _____

Lamp(s): _____

Specifier: _____

Contractor: _____

Notes: _____

FOCUS INDUSTRIES INC.
25301 COMMERCENTRE DRIVE
LAKE FOREST, CA 92630

www.focusindustries.com
sales@focusindustries.com
(949) 830-1350 • FAX (949) 830-3390

FSA-00

Powder Coat Finishes	Black Texture (Standard)	Antique Verde	Bronze Texture	Camel	White Texture	Hunter Texture	Rust	Weathered Iron	Weathered Brown	Stucco	Rubbed Verde	Chrome Powder	Terra Cotta
Ordering Code	-BLT	-ATV	-BRT	-CAM	-WTX	-HTX	-RST	-WIR	-WBR	-STU	-RBV	-CPR	-TRC




FOCUS™
INDUSTRIES

INSTALLATION INSTRUCTIONS (12V) FOR AREA & PATH LIGHT FIXTURES

Inspected by

1) Thread Mounting device onto base of fixture. If using FA-03, FA-03-LG or FA-04, press into ground and connect to main cable using FA-05 Quick Connector (See Instructions). If using FA-01, make sure the base PVC is free of dirt/debris to allow the inner tube adjustment as needed. A set screw is provided to set desired height. If using FA-25, you must dig a 6"-8" dia. hole, 10"-14" deep. Loop main cable into stake or run fixture wire out of bottom to main cable. Make connection with FA-05 then back fill hole and wiring. If using FA-22, 24, or 24-LG canopies, secure w/appropriate screws for mounting surface.

2) All 12v Area/Path lights are supplied with lamps installed. To remove single contact lamps, turn off power, let cool down, push & turn counter clockwise, then pull outward and away from socket. For T-3 bi-pin Halogen, Xenon and Compact Fluorescent lamps: turn power off, let cool down, pull outward and away from socket. It is recommended to lubricate single contact lamp base w/dielectric or lithium grease for ease of service and future maintenance.

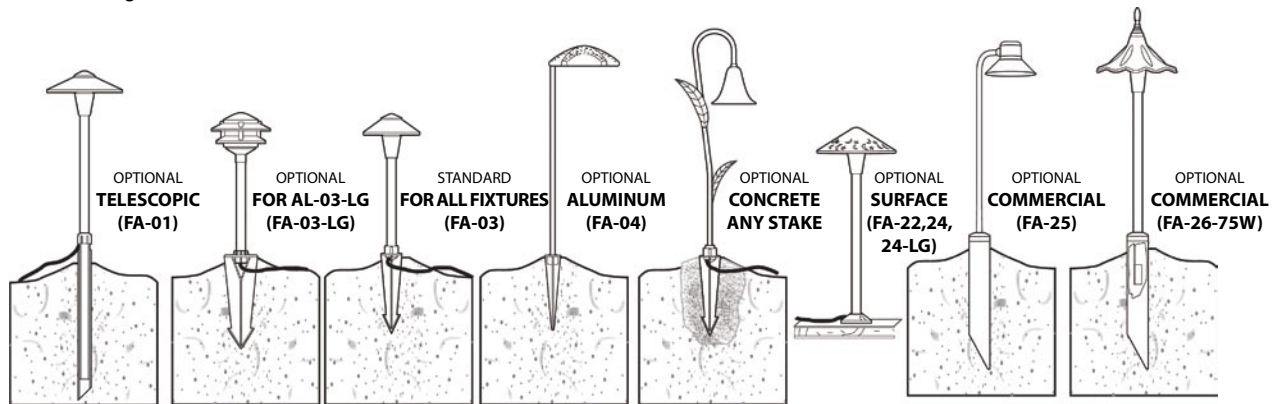

NOTE: All mounting stakes can be pressed or hammered into the ground with a standard hammer or rubber mallet. A small block of wood is recommended to give you a larger surface to pound. Always leave the top 1" section of the stake above ground to help isolate the metal from potentially corrosive soils. Fixture wire (18/2) should be buried underground to prevent detachment & have a cleaner look. For a more permanent mount, you can set the stake in concrete or use FA-25 commercial mounting pedestal.

IMPORTANT SAFETY INSTRUCTIONS TO REDUCE THE RISK OF FIRE AND INJURY TO PERSONS:

- 1) Lamp gets hot quickly; turn off/unplug/ disconnect and allow to cool down before replacing the bulb.
- 2) DO NOT touch hot lens, guard or enclosure
- 3) DO NOT look into lamp when on
- 4) Keep lamp away from materials that may burn
- 5) Use only with wattage/lamp marked on fixture warning or instructions.
- 6) Use right light bulb base w/right socket
- 7) DO NOT touch the lamp at any time. Use a lint-free cloth when handling bulb as oil from skin may damage lamp and shorten lamp life.
- 8) DO NOT operate fixture with missing/ damaged shield.

For Questions Call 1-888-882-1350