



SURFACE DIRECTIONAL LIGHTS SL-37-SERIES

SPECIFICATIONS

CONSTRUCTION: Extruded copper tubing (0.040" thick)

LENS HOLDER: Extruded copper tubing (0.050" thick)

LENS: Clear tempered flat glass

SOCKET-SL-37-MR8, SL-37-MR11: GZ4 base, bi-pin, ceramic with 250°C wires

SL-37-MR16: GU5.3 base bi-pin, ceramic with 250°C wires

LAMP-SL-37-MR8: 20 watt MR8 (20w max.)

SL-37-MR11: 20 watt MR11 (20w max.)

SL-37-MR16: 20 watt MR16 (20w max.)

LAMP LIFE: 2000 hours average rating for MR8 and MR11, 5000 hours average rating for MR16

WIRING: Black 5 ft. 18/2 zip cord from base of fixture

CONNECTION: FA-05 Quick Connector (not supplied) from main 12/2, 10/2 or 8/2 cable (12 volt only)

FINISH: Unfinished copper-optional acid treatments available

ORDERING INFORMATION

CATALOG NO.	DESCRIPTION
SL-37-MR8	Copper recessed deck up/down light
SL-37-MR11	Copper recessed deck up/down light
SL-37-MR16	Copper recessed deck up/down light

RECOMMENDED ENHANCEMENTS FOR SL-37-MR8 SERIES:

FA-08-36C-8	Round 1/8" Hex Cell Louver
FA-11-36C-8-BLUE	Blue Tempered Glass
FA-11-36C-8-GREEN	Green Tempered Glass
FA-98-36C-8	Linear Spread Tempered Glass
FA-104-36C-8	Wide Spread Tempered Glass


RECOMMENDED ENHANCEMENTS FOR SL-37-MR11 SERIES:

FA-08-36C-11	Round 1/8" Hex Cell Louver
FA-11-36C-11-BLUE	Blue Tempered Glass
FA-11-36C-11-GREEN	Green Tempered Glass
FA-98-36C-11	Linear Spread Tempered Glass
FA-104-36C-11	Wide Spread Tempered Glass

RECOMMENDED ENHANCEMENTS FOR SL-37-MR16 SERIES:

FA-08-36C-16	Round 1/8" Hex Cell Louver
FA-11-36C-16-BLUE	Blue Tempered Glass
FA-11-36C-16-GREEN	Green Tempered Glass
FA-98-36C-16	Linear Tempered Spread Glass
FA-104-36C-16	Wide Spread Tempered Glass


LIGHT DISTRIBUTIONS AND PHOTOMETRICS

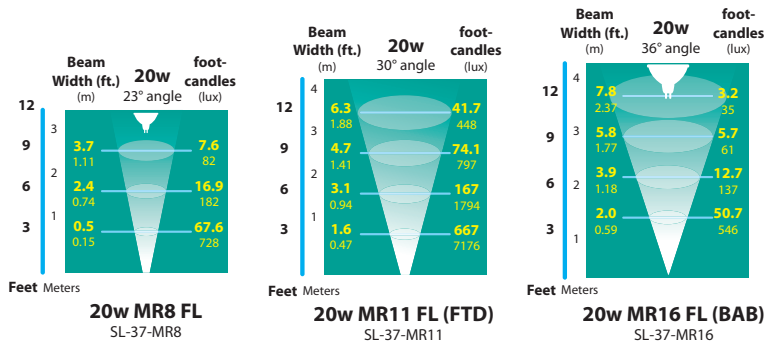


12v. fixtures: 25 foot 16/2 fixture lead wire available; add -25F to catalog number.
For use with Focus CPC or hub supplied by others.

FSA-00



Powder Coat Finishes	Black Texture (Standard)	Antique Verde	Bronze Texture	Camel	White Texture	Hunter Texture	Rust	Weathered Iron	Weathered Brown	Stucco	Rubbed Verde	Chrome Powder	Terra Cotta
Ordering Code	-BLT	-ATV	-BRT	-CAM	-WTX	-HTX	-RST	-WIR	-WBR	-STU	-RBV	-CPR	-TRC



SL-37-MR8



SL-37-MR11

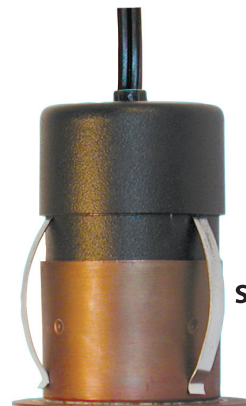

SL-37-MR16



JOB INFORMATION

Type:	Date:
Job Name:	
Cat. No.:	
Lamp(s):	
Specifier:	
Contractor:	
Notes:	

FOCUS INDUSTRIES INC.
25301 COMMERCE DRIVE
LAKE FOREST, CA 92630

www.focusindustries.com
sales@focusindustries.com
(949) 830-1350 • FAX (949) 830-3390



FOCUS™
INDUSTRIES

INSTALLATION INSTRUCTIONS FOR SL-37 SURFACE DIRECTIONAL LIGHT FIXTURES (12v)


Inspected by

1. Make sure power is off locally.
2. Make location where fixture will be installed.
3. Check for proper clearance.
4. Drill appropriate whole sizes. For MR-8, 1 1/2", MR-11, 2", MR-16, 2 1/2".
5. Insert wiring through hole and wire to 12v power source.
6. Insert fixture into hole. Spring clips will hold fixture into place.
7. Turn on power, check for proper operations.

LAMP INSTALLATION/REPLACEMENT

CAUTION: Do not exceed maximum wattage marked on fixture label.

1. Turn off power to fixture.
2. Pull fixture out of hole that it is installed into.
3. Pull off cap to expose lamp.
4. Pull off lamp from socket and replace with same type and wattage.
5. Replace cap and light fixture and check for proper installation.

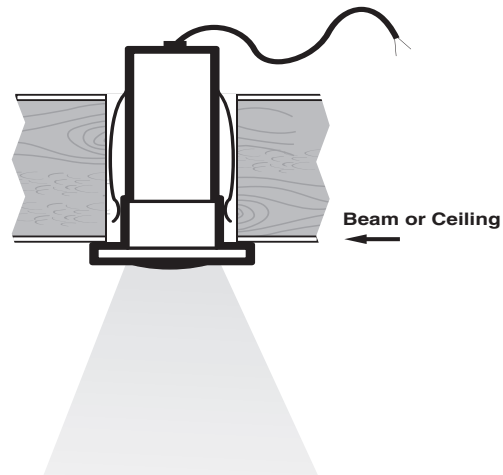

**NOTE: Must be installed by a licensed electrician per local codes
For Questions Call 1-888-882-1350**