



SURFACE STEP LIGHTS SL-35-SERIES

SPECIFICATIONS

CONSTRUCTION-SL-35-BRS: Stamped brass; **SL-35-COP:** Stamped copper

LAMP: 18 watt S-8 #1141; 1200 hours average (25 watt max.)

SOCKET: Single contact bayonet; (Ba15s) brass nickel plated screw shell and spring; ceramic contact with 200° silicone lead wires

WIRING: Black 5 foot 18/2 zip cord (12v. only)


CONNECTION: FA-05 Quick Connector (not supplied) from fixture to main cable (12/2, 10/2 or 8/2 only)

FINISH-SL-35-BRS: Unfinished brass; **SL-35-COP:** Unfinished copper—optional finishes available


ORDERING INFORMATION

CATALOG NO.	DESCRIPTION	MATERIAL
SL-35-BRS	Surface Step Deck Light	Brass
SL-35-COP	Surface Step Deck Light	Copper


LIGHT DISTRIBUTIONS AND PHOTOMETRICS

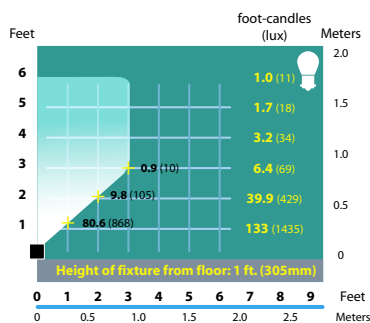

SL-35 Half Spread Photometrics

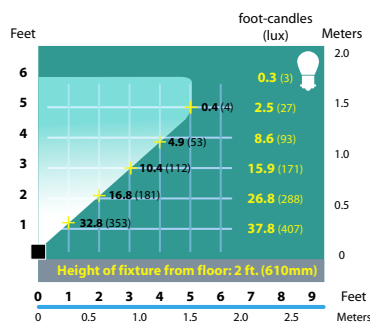


SL-35 Half Spread Photometrics

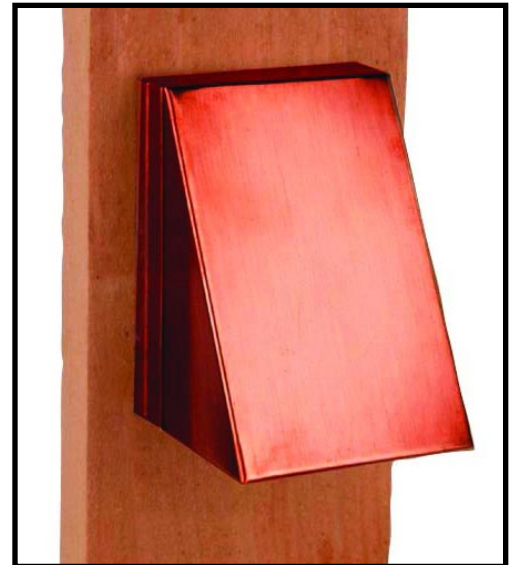

SL-35-COP

10,000 HOUR
XENON
&
HALOGEN
AVAILABLE



SL-35



JOB INFORMATION

Type:	Date:
Job Name:	
Cat. No.:	
Lamp(s):	
Specifier:	
Contractor:	
Notes:	

FOCUS INDUSTRIES INC.
25301 COMMERCE DRIVE
LAKE FOREST, CA 92630

www.focusindustries.com
sales@focusindustries.com
(949) 830-1350 • FAX (949) 830-3390

FSA-00

Powder Coat Finishes	Black Texture (Standard)	Antique Verde	Bronze Texture	Camel	White Texture	Hunter Texture	Rust	Weathered Iron	Weathered Brown	Stucco	Rubbed Verde	Chrome Powder	Terra Cotta
Ordering Code	-BLT	-ATV	-BRT	-CAM	-WTX	-HTX	-RST	-WIR	-WBR	-STU	-RBV	-CPR	-TRC



FOCUS™
INDUSTRIES

INSTALLATION INSTRUCTIONS FOR SL-35 SURFACE STEP LIGHT FIXTURES (12v)

Inspected by


1. Remove front cover by sliding up from back plate.
2. Using back plate as a template. Screw plate into surface using screws provided.
3. Slide cover down on to base.
4. Wire to 12v power source and check for proper installation.

NOTE: Wire can be run down the bottom of fixture and attached to surface using staples or a hole can be drilled to put wire through the back of surface to hide wirings.

LAMP INSTALLATION/REPLACEMENT

CAUTION: Do not exceed maximum wattage marked on fixture label.

1. Turn off power to fixture.
2. Remove front cover by sliding up.
3. Push lamp into socket while turning counter clockwise to remove lamp.
4. To re-install: Push lamp in and turn clockwise.
5. Replace cover and Turn on power to check for proper operation.

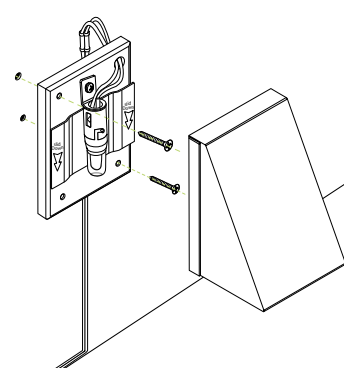

NOTE: Must be installed by a licensed electrician per local codes
For Questions Call 1-888-882-1350