



# HANGING FIXTURES SL-05-SERIES

## SPECIFICATIONS

**CONSTRUCTION-SL-05-BRS:** Heavy-duty spun brass  
**SL-05:** Heavy-duty spun aluminum  
**SL-05-COP:** Heavy-duty spun copper  
 All equipped with 18" long baby oval brass chain and cast brass hoop

**LAMP:** 18 watt, S-8 #1141 (25 watt max.)

**LAMP LIFE:** 1200 hours average rating for S-8 #1141

**SOCKET:** Single contact bayonet, brass nickel plated screw shell (Ba15s) with 200°C lead wires

**WIRING:** Black 2 foot 18/2 zip cord. Consult factory for additional lengths

**MOUNT:** FA-111-SM-H hanging fixture mini junction box


**FINISH-SL-05-BRS:** Unfinished brass

**SL-05-COP:** Unfinished copper


**SL-05:** Black texture polyester powder coat-optional finishes available

## ORDERING INFORMATION


CATALOG NO.	DESCRIPTION
SL-05	4.5" spun aluminum Bell
SL-05-BRS	4.5" spun brass Bell
SL-05-COP	4.5" spun copper Bell



FA-111-SM-H




SL-05

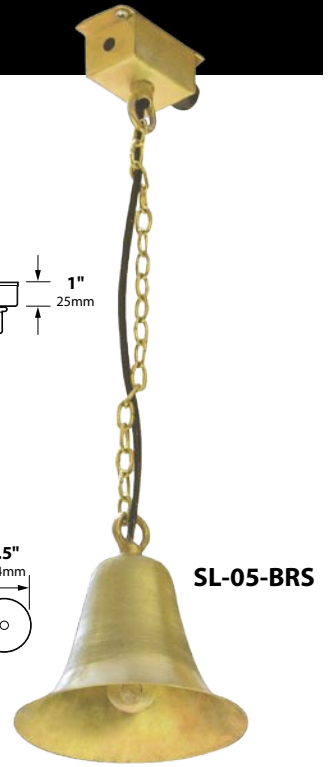


SL-05-BRS

## LIGHT DISTRIBUTIONS AND PHOTOMETRICS

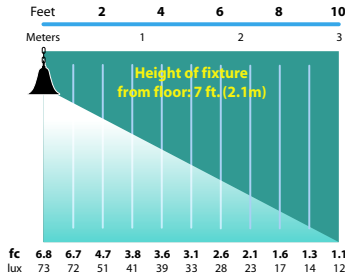

**SL-05**  
Half Spread Photometrics  
20 ft. (6.0m) diameter

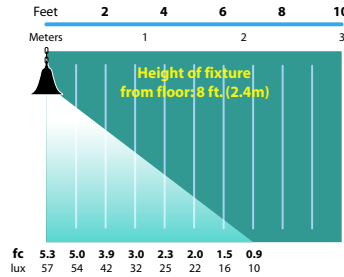

**SL-05**  
Half Spread Photometrics  
14 ft. (4.3m) diameter



### JOB INFORMATION

Type: \_\_\_\_\_ Date: \_\_\_\_\_

Job Name: \_\_\_\_\_

Cat. No.: \_\_\_\_\_

Lamp(s): \_\_\_\_\_

Specifier: \_\_\_\_\_

Contractor: \_\_\_\_\_

Notes: \_\_\_\_\_

**12v. fixtures:** 25 foot 16/2 fixture lead wire available; add -25F to catalog number.  
 For use with Focus CPC or hub supplied by others.

**FOCUS INDUSTRIES INC.**  
 25301 COMMERCENTRE DRIVE  
 LAKE FOREST, CA 92630

[www.focusindustries.com](http://www.focusindustries.com)  
[sales@focusindustries.com](mailto:sales@focusindustries.com)  
 (949) 830-1350 • FAX (949) 830-3390

FSA-00

Powder Coat Finishes	Black Texture (Standard)	Antique Verde	Bronze Texture	Camel	White Texture	Hunter Texture	Rust	Weathered Iron	Weathered Brown	Stucco	Rubbed Verde	Chrome Powder	Terra Cotta
Ordering Code	-BLT	-ATV	-BRT	-CAM	-WTX	-HTX	-RST	-WIR	-WBR	-STU	-RBV	-CPR	-TRC




**FOCUS**<sup>™</sup>  
INDUSTRIES

**INSTALLATION INSTRUCTIONS (12V)  
FOR SL-05 HANGING LIGHT FIXTURES**

Inspected by

- 1) Using Junction Box as a template mark holes to attach to surface. Drill hole if necessary.
- 2) Bring in 12v supply wire through liquid tight connector and wire to 18/2c zip cord using blue wirenuts provided.
- 3) Attach/screw box to surface with appropriate fastener. Wire supply wire to 12v and check for proper installation.

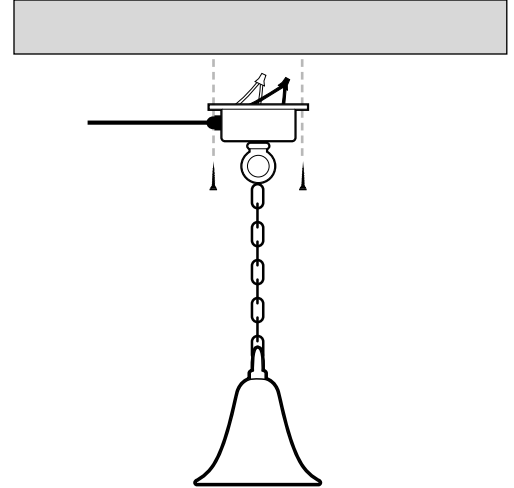

**For Questions Call 1-888-882-1350**