



# AREA LIGHTS AL-10-LGP-SERIES

## SPECIFICATIONS

**CONSTRUCTION-AL-10-LGP-BRS:** Formed brass cage

**LENS:** 1/8" gold iridescent glass

**LAMP:** 18 watt S-8 #1411

**LAMP LIFE:** 2000 hours average rating

**SOCKET:** Single contact bayonet, brass nickel plated screw shell (Ba15s); double contact bayonet base (Ba15d) for 120v., both with 200° C silicone lead wires

**WIRING:** Black 3 foot 18/2 zip cord. Consult factory for additional lengths

**FINISH-AL-10-LGP-BRS:** Unfinished brass

## ORDERING INFORMATION

### CATALOG NO. DESCRIPTION

**AL-10-LGP-BRS** Solid brass lantern with mounting kit

#### Available in:

Raw Unfinished Brass ..... -BRS

Acid Rust ..... -BAR

Acid Verde ..... -BAV

#### 12v Light sources:

12w, 18w (std.) or 25w ..... Incandescent S.C.

10w or 20w T3 ..... Halogen S.C.

10w or 20w T2.5 ..... Xenon S.C.

#### 120v Light sources:

35w T4 ..... Halogen DC

15w T7 ..... Incandescent DC


25w T8 ..... Incandescent DC

5w or 7w Double Tube ..... CF Compact Fluorescent

13 w Quad Tube ..... CF Compact Fluorescent



**AL-10-LG-P-BAV**

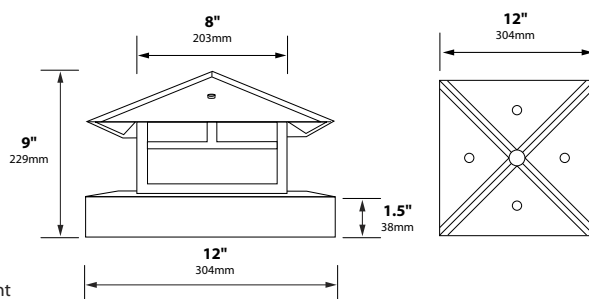

**AL-10-LGP**

#### Mounting Kit Includes:

1x- Mounting plate

3x- Blue 1/4" anchors

3x- #10 1" Steel sink phillips screws


2x- Washers

2x- Brass thumb screws



AL-10LGP-Mounting Kit

## LIGHT DISTRIBUTIONS AND PHOTOMETRICS

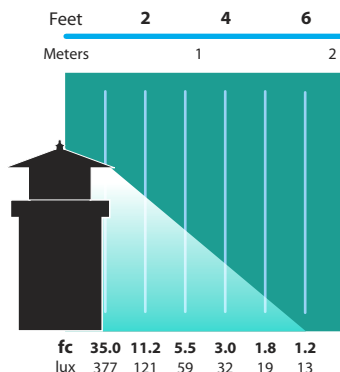

### AL-10-LGP

Half Spread Photometrics  
12 ft. (3.7m) diameter

**12v. fixtures:** 25 foot 16/2 fixture lead wire available; add -25F to catalog number.



### JOB INFORMATION

Type:	Date:
Job Name:	
Cat. No.:	
Lamp(s):	
Specifier:	
Contractor:	
Notes:	

FOCUS INDUSTRIES INC.  
25301 COMMERCE DRIVE  
LAKE FOREST, CA 92630

www.focusindustries.com  
sales@focusindustries.com  
(949) 830-1350 • FAX (949) 830-3390

FSA-00

Powder Coat Finishes	Black Texture (Standard)	Antique Verde	Bronze Texture	Camel	White Texture	Hunter Texture	Rust	Weathered Iron	Weathered Brown	Stucco	Rubbed Verde	Chrome Powder	Terra Cotta
Ordering Code	-BLT	-ATV	-BRT	-CAM	-WTX	-HTX	-RST	-WIR	-WBR	-STU	-RBV	-CPR	-TRC



# AREA LIGHTS AL-10-LGP-SERIES



## INSTALLATION INSTRUCTIONS (12V) FOR AL-10-LGP AREA LIGHT FIXTURES

Inspected by

**NOTE: Fixtures need to be mounted on a surface larger than 12.5" square.**

1. Locate center of surface. This can be done by drawing two diagonal lines from opposite corners and marking their intersection.
2. Center bracket over hole. Noting that mounting pegs should be parallel with mounting edge. Mark three holes.
3. Drill three 1/4" holes where marked. Also drill one hole for wiring.

**NOTE: Can have 1/2" conduit roughed in through top.**

4. Insert blue anchors and tap flush with surface.
5. Screw in mounting plate using #2 phillips screwdriver.
6. Remove top of fixture by removing 4 thumb screws. Place fixture over bracket and line up with holes. Mark outside edges for gasket placement.
7. Remove adhesive backing and place on surface.
8. Insert wire through hole and wire to 12v power source.
9. Place fixture on surface and attach using thumb screws and washers.
10. Re-attach top with 4 screws. Check for proper installation.

**NOTE: Must be installed by a licensed electrician per local codes  
For Questions Call 1-888-882-1350**