

# HANGING FIXTURES SL-06-SERIES

# **SPECIFICATIONS**

CONSTRUCTION-SL-06-BRS: Cast brass

SL-06: Cast aluminum

All equipped with 18" long baby oval brass chain and cast brass hoop

LAMP: 18 watt, S-8 #1141 (25 watt max.)

LAMP LIFE: 1200 hours average rating for S-8 #1141

**SOCKET:** Single contact bayonet, brass nickel plated screw shell (Ba15s) with 200°C lead wires

 $\textbf{WIRING:} \ \ \text{Black 2 foot 18/2 zip cord.} \ \ \text{Consult factory for additional lengths}$ 

MOUNT: FA-111-SM-H hanging fixture mini junction box

FINISH-SL-06-BRS: Unfinished brass


**SL-06:** Black texture polyester powder coat-optional finishes available

# **ORDERING INFORMATION**


#### CATALOG NO. DESCRIPTION

FSA-00

SL-06 4.5" cast aluminum Tulip SL-06-BRS 4.5" cast brass Tupip

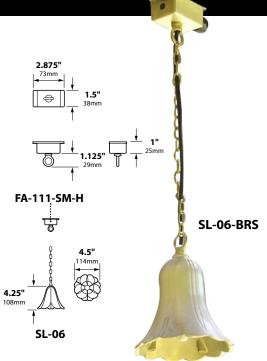

# LIGHT DISTRIBUTIONS AND PHOTOMETRICS



Half Spread Photometrics 20 ft. (6.0m) diameter **SL-06**Half Spread Photometrics
14 ft. (4.3m) diameter



	V/ISTED V
JOB INFORMATION	
Туре:	Date:
Job Name:	
Cat. No.:	
Lamp(s):	
Specifier:	
Contractor:	
Notes:	
FOCUS INDUSTRIES INC. 25301 COMMERCENTRE DRIVE LAKE FOREST. CA 92630	www.focusindustries.com sales@focusindustries.com (949) 830-1350 • FAX (949) 830-3390

**12v. fixtures:** 25 foot 16/2 fixture lead wire available; add **-25F** to catalog number. For use with Focus CPC or hub supplied by others

For use with Focus CPC or hub supplied by others.

Powder Coat Finishes	Black Texture (Standard)	Antique Verde	Bronze Texture	Camel	White Texture	Hunter Texture	Rust	Weathered Iron	Weathered Brown	Stucco	Rubbed Verde	Chrome Powder	Terra Cotta
Ordering Code	-BLT	-ATV	-BRT	-CAM	-WTX	-HTX	-RST	-WIR	-WBR	-STU	-RBV	-CPR	-TRC






# **INSTALLATION INSTRUCTIONS (12V)** FOR HANGING LIGHT FIXTURES

Inspected by

- 1) Using Junction Box as a template mark holes to attach to surface. Drill hole if necessary.
  2) Bring in 12v supply wire through liquid tight connector and wire to 18/2c zip cord using blue wirenuts provided.
- 3) Attach/screw box to surface with appropriate fastner. Wire supply wire to 12v and check for proper installation.



For Questions Call 1-888-882-1350