

SPECIFICATIONS

CONSTRUCTION:

CONSTRUCTION-PL-07: Black 3.5" O.D. ABS post with cast aluminum top

PL-07-ALUM: Cast aluminum top, extruded aluminum post

PL-07-BRS: Cast brass top, extruded brass post

PL-07-COP: Cast brass top, extruded copper post

PL-07-L: Materials are the same as above, post is 4.5" diameter

LENS: White high-impact acrylic

REFLECTOR: Highly polished specular aluminum

LAMP: 18 watt S-8 #1141; 1200 hours average rating (25w max.)

SOCKET: Single contact bayonet, brass nickel plated screw shell (Ba15s); double contact bayonet base (Ba15d) for 120v., both with 200° C silicone lead wires

WIRING: Black 3 foot 18/2 zip cord from base of fixture (12v. only)

CONNECTION: FA-05 Quick Connector (not supplied) from fixture to main cable (12/2, 10/2 or 8/2 only) 12v. only


MOUNTING: 4 x FA-42 FIN stabilizing fins (supplied)

FINISH: Optional finishes available

10,000 HOUR



We recommend the Xenon 10,000 hour bulb. Add -10K to catalog number.

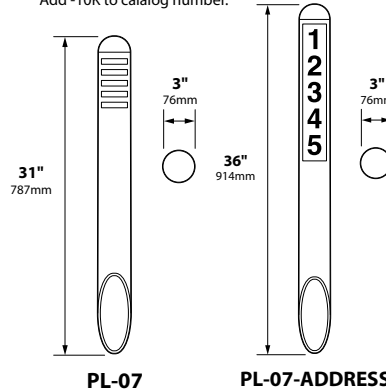


PL-07




ORDERING INFORMATION

CATALOG NO.	DESCRIPTION	LAMP SUPPLIED	STANDARD FINISH	EST. SHIP. WEIGHT
12 VOLT				
PL-07	ABS 180° mini bollard, black	18 watt S-8 #1141	Black texture	3.0 lbs.
PL-07-RBV	Same as above, hand-applied finish	18 watt S-8 #1141	Rubbed verde	3.0 lbs.
PL-07-ALUM	Aluminum 180° mini bollard	18 watt S-8 #1141	Black texture	3.0 lbs.
PL-07-BRS	Brass 180° mini bollard	18 watt S-8 #1141	Brass, unfinished	20 lbs.
PL-07-COP	Copper 180° mini bollard	18 watt S-8 #1141	Copper, unfinished	3.0 lbs.
12 VOLT HALOGEN ADDRESS				
Please supply wattage, color of light bulbs and address numbers at time of order. They are factory-installed 2"-high black Helvetica vinyl numbers. 1 to 5 bulbs in fixture; dependent upon quantity of vinyl address numerals ordered.				
PL-07-ADDRESS-H	ABS address mini bollard, black	1 to 5 halogen (5w)	Black texture	3.0 lbs.
PL-07-ADDRESS-H-RBV	Same as above, hand-applied finish	1 to 5 halogen (5w)	Rubbed verde	3.0 lbs.
PL-07-ADDRESS-H-ALUM	Aluminum address mini bollard	1 to 5 halogen (5w)	Black texture	3.0 lbs.
PL-07-ADDRESS-H-BRS	Brass address mini bollard	1 to 5 halogen (5w)	Brass, unfinished	20 lbs.
PL-07-L-ADDRESS-H	ABS address 4.5" dia. bollard, black	1 to 5 halogen (5w)	Black texture	3.0 lbs.
PL-07-L-ADDRESS-H-RBV	Same as above, hand-applied finish	1 to 5 halogen (5w)	Rubbed verde	3.0 lbs.
PL-07-L-ADDRESS-H-ALUM	Aluminum address bollard	1 to 5 halogen (5w)	Black texture	3.0 lbs.

SUPPLIED ACCESSORIES



LIGHT DISTRIBUTIONS AND PHOTOMETRICS



PL-07
Light Distribution and Photometrics
6 ft. (1.8m) radius

JOB INFORMATION

Type: _____ Date: _____

Job Name: _____

Cat. No.: _____

Lamp(s): _____

Specifier: _____

Contractor: _____

Notes: _____

FOCUS LANDSCAPE LIGHTING
25301 COMMERCENTRE DRIVE
LAKE FOREST, CA 92630

www.focusindustries.com
sales@focusindustries.com
(949) 830-1350 • FAX (949) 830-3390

© January 2006 Focus Industries Inc. All rights reserved. FSA-00 \$2.00


Powder Coat Finishes	Black Texture (Standard)	Antique Verde	Bronze Texture	Camel	White Texture	Hunter Texture	Rust	Weathered Iron	Weathered Brown	Stucco	Rubbed Verde	Chrome Powder	Terra Cotta
Ordering Code	-BLT	-ATV	-BRT	-CAM	-WTX	-HTX	-RST	-WIR	-WBR	-STU	-RBV	-CPR	-TRC

INSTALLATION INSTRUCTIONS (12V) FOR AREA & PATH LIGHT FIXTURES

Inspected by

1) Thread Mounting device onto base of fixture. If using FA-03, FA-03-LG or FA-04, press into ground and connect to main cable using FA-05 Quick Connector (See Instructions). If using FA-01, make sure the base PVC is free of dirt/debris to allow the inner tube adjustment as needed. A set screw is provided to set desired height. If using FA-25, you must dig a 6"-8" dia. hole, 10"-14" deep. Loop main cable into stake or run fixture wire out of bottom to main cable. Make connection with FA-05 then back fill hole and w screw:

2) All 12v Area/Path lights are supplied with lamps installed. To remove single contact lamps, turn off power, let cool down, push & turn counter clockwise, then pull outward and away from socket. For T-3 bi-pin Halogen, Xenon and Compact Fluorescent lamps: turn power off, let cool down, pull outward and away from socket. It is recommended to lubricate single contact lamp base w/dielectric or lithium grease for ease of service and future maintenance.

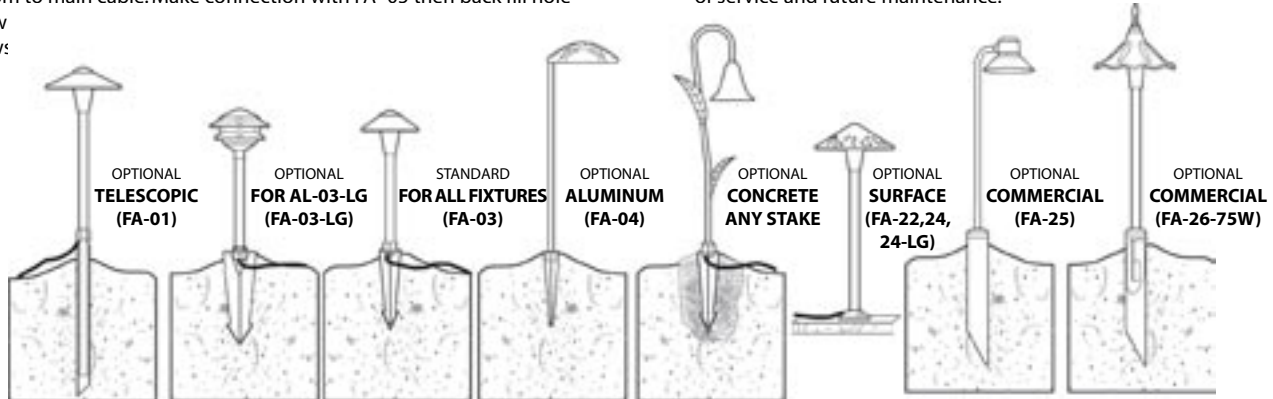

NOTE: All mounting stakes can be pressed or hammered into the ground with a standard hammer or rubber mallet. A small block of wood is recommended to give you a larger surface to pound. Always leave the top 1" section of the stake above ground to help isolate the metal from potentially corrosive soils. Fixture wire (18/2) should be buried underground to prevent detachment & have a cleaner look. For a more permanent mount, you can set the stake in concrete or use FA-25 commercial mounting pedestal.

IMPORTANT SAFETY INSTRUCTIONS TO REDUCE THE RISK OF FIRE AND INJURY TO PERSONS:

- 1) Lamp gets hot quickly; turn off/unplug/ disconnect and allow to cool down before replacing the bulb.
- 2) DO NOT touch hot lens, guard or enclosure
- 3) DO NOT look into lamp when on
- 4) Keep lamp away from materials that may burn
- 5) Use only with wattage/lamp marked on fixture warning or instructions.
- 6) Use right light bulb base w/right socket
- 7) DO NOT touch the lamp at any time. Use a lint-free cloth when handling bulb as oil from skin may damage lamp and shorten lamp life.
- 8) DO NOT operate fixture with missing/ damaged shield.

For Questions Call 1-888-882-1350

PATH LIGHTS PL-07(120 Volt)-SERIES

SPECIFICATIONS

CONSTRUCTION: **PL-07 Series:** Black 3.0" O.D. ABS post with cast aluminum top
PL-07-ALUM Series: Cast aluminum top, extruded aluminum post
PL-07-BRS Series: Cast brass top, extruded brass post
PL-07-COP Series: Cast brass top, extruded copper post
PL-07-L Series: Materials are same as above, post is 4.5" diameter

LENS: White high-impact acrylic

REFLECTOR: Highly polished specular aluminum


LAMP: Compact fluorescent; 10,000 hours average rating

SOCKET: G23 bi-pin for 5 or 7 watt or GX23 bi-pin for 13 watt, with type-1 outdoor magnetic clamped core ballast

WIRING: Standard 120v., black, white and ground, 18 gauge

MOUNTING: 4 x FA-42-FIN stabilizing fins (supplied)

FINISH: Optional finishes available

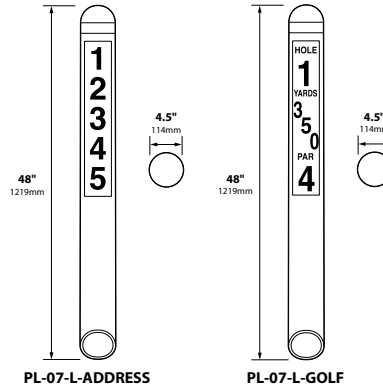

10,000 HOUR



We recommend the Xenon 10,000 hour bulb. Add -10K to catalog number.

PL-07-BRS



ORDERING INFORMATION

CATALOG NO.	DESCRIPTION	LAMP SUPPLIED	STANDARD FINISH	EST. SHIP. WEIGHT
120 VOLT COMPACT FLUORESCENT				
PL-07-FL-5, 7-120V	ABS 180° mini bollard	5 or 7 watt 41°K	Black texture	3.0 lbs.
PL-07-FL-5, 7-RBV-120V	Same as above, hand-applied finish	5 or 7 watt 41°K	Rubbed verde	3.0 lbs.
PL-07-FL-5, 7-ALUM	Aluminum 180° mini bollard	5 or 7 watt 41°K	Black texture	3.0 lbs.
PL-07-FL-5, 7-120V-BRS	Brass 180° mini bollard	5 or 7 watt 41°K	Brass, unfinished	20 lbs.
PL-07-FL-5, 7-120V-COP	Copper 180° mini bollard	5 or 7 watt 41°K	Copper, unfinished	3.0 lbs.

Please supply wattage, color of light bulbs and address numbers at time of order. They are factory-installed 2" high black Helvetica vinyl numbers. 1 to 5 bulbs in fixture; dependent upon quantity of vinyl address numerals ordered.

PL-07-ADDRESS-FL-26	ABS address mini bollard, black	2 x 13 watt 41°K	Black texture	3.0 lbs.
PL-07-ADDRESS-FL-26-RBV	Same as above, hand-applied finish	2 x 13 watt 41°K	Rubbed verde	3.0 lbs.
PL-07-ADDRESS-FL-26-ALUM	Aluminum address mini bollard	2 x 13 watt 41°K	Black texture	3.0 lbs.
PL-07-ADDRESS-FL-26-BRS	Brass address mini bollard	2 x 13 watt 41°K	Brass, unfinished	20 lbs.
PL-07-ADDRESS-FL-26-COP	Copper address mini bollard	2 x 13 watt 41°K	Copper, unfinished	3.0 lbs.


Please supply wattage, color of light bulbs and address numbers at time of order. They are factory-installed 3"-high black Helvetica vinyl numbers..

PL-07-L-ADDRESS-FL-26	ABS address 4.5" dia. bollard, black	2 x 13 watt 41°K	Black texture	3.0 lbs.
PL-07-L-ADDRESS-FL-26-RBV	Same as above, hand-applied finish	2 x 13 watt 41°K	Rubbed verde	3.0 lbs.
PL-07-L-ADDRESS-FL-26-ALUM	Aluminum address mini bollard	2 x 13 watt 41°K	Black texture	3.0 lbs.


Please supply hole number, yards to pin, and par number for each fixture at time of order. They are factory-installed 3" and 2"-high black Helvetica vinyl numbers.

PL-07-L-GOLF-120V	ABS Golf/Tee 4.5" dia. bollard, black	2 x 13 watt 41°K	Black texture	3.0 lbs.
PL-07-L-GOLF-120V-RBV	Same as above, hand-applied finish	2 x 13 watt 41°K	Rubbed verde	3.0 lbs.
PL-07-L-GOLF-120V-ALUM	Aluminum address mini bollard	2 x 13 watt 41°K	Black texture	3.0 lbs.

SUPPLIED MOUNTING ACCESSORIES



LIGHT DISTRIBUTIONS AND PHOTOMETRICS

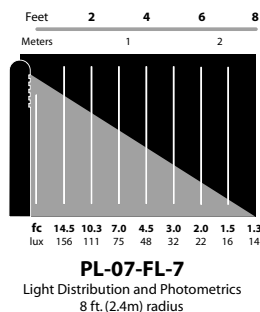

JOB INFORMATION

Type: _____ Date: _____

Job Name: _____

Cat. No.: _____

Lamp(s): _____

Specifier: _____

Contractor: _____

Notes: _____

FOCUS LANDSCAPE LIGHTING
25301 COMMERCENTRE DRIVE
LAKE FOREST, CA 92630

www.focusindustries.com
sales@focusindustries.com
(949) 830-1350 • FAX (949) 830-3390

12v. fixtures: 25 foot 16/2 fixture lead wire available; add -25F to catalog number.

For use with Focus CPC or hub supplied by others.

© January 2006 Focus Industries Inc. All rights reserved. FSA-00 \$2.00


Powder Coat Finishes	Black Texture (Standard)	Antique Verde	Bronze Texture	Camel	White Texture	Hunter Texture	Rust	Weathered Iron	Weathered Brown	Stucco	Rubbed Verde	Chrome Powder	Terra Cotta
Ordering Code	-BLT	-ATV	-BRT	-CAM	-WTX	-HTX	-RST	-WIR	-WBR	-STU	-RBV	-CPR	-TRC

INSTALLATION INSTRUCTIONS (12V) FOR AREA & PATH LIGHT FIXTURES

Inspected by

1) Thread Mounting device onto base of fixture. If using FA-03, FA-03-LG or FA-04, press into ground and connect to main cable using FA-05 Quick Connector (See Instructions). If using FA-01, make sure the base PVC is free of dirt/debris to allow the inner tube adjustment as needed. A set screw is provided to set desired height. If using FA-25, you must dig a 6"-8" dia. hole, 10"-14" deep. Loop main cable into stake or run fixture wire out of bottom to main cable. Make connection with FA-05 then back fill hole and w screw:

2) All 12v Area/Path lights are supplied with lamps installed. To remove single contact lamps, turn off power, let cool down, push & turn counter clockwise, then pull outward and away from socket. For T-3 bi-pin Halogen, Xenon and Compact Fluorescent lamps: turn power off, let cool down, pull outward and away from socket. It is recommended to lubricate single contact lamp base w/dielectric or lithium grease for ease of service and future maintenance.

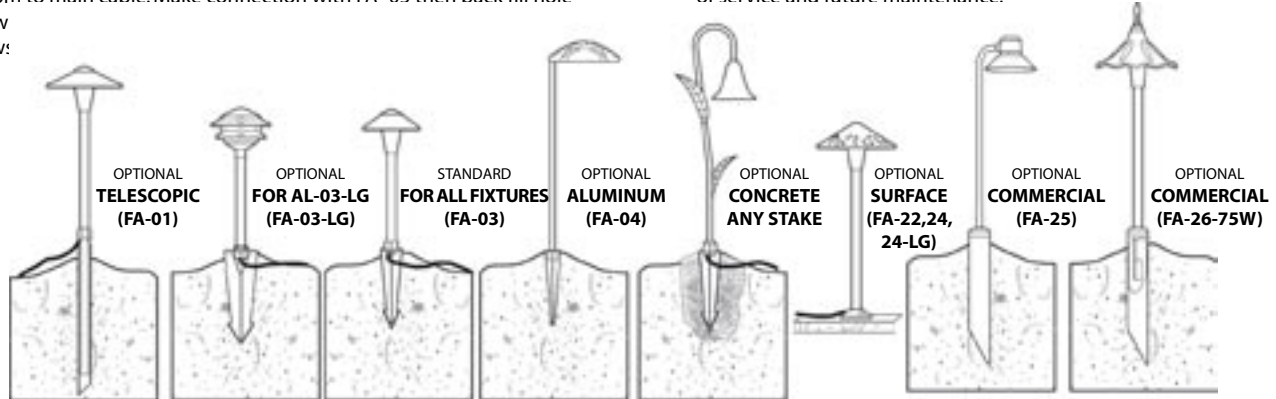

NOTE: All mounting stakes can be pressed or hammered into the ground with a standard hammer or rubber mallet. A small block of wood is recommended to give you a larger surface to pound. Always leave the top 1" section of the stake above ground to help isolate the metal from potentially corrosive soils. Fixture wire (18/2) should be buried underground to prevent detachment & have a cleaner look. For a more permanent mount, you can set the stake in concrete or use FA-25 commercial mounting pedestal.

IMPORTANT SAFETY INSTRUCTIONS TO REDUCE THE RISK OF FIRE AND INJURY TO PERSONS:

- 1) Lamp gets hot quickly; turn off/unplug/ disconnect and allow to cool down before replacing the bulb.
- 2) DO NOT touch hot lens, guard or enclosure
- 3) DO NOT look into lamp when on
- 4) Keep lamp away from materials that may burn
- 5) Use only with wattage/lamp marked on fixture warning or instructions.
- 6) Use right light bulb base w/right socket
- 7) DO NOT touch the lamp at any time. Use a lint-free cloth when handling bulb as oil from skin may damage lamp and shorten lamp life.
- 8) DO NOT operate fixture with missing/ damaged shield.

For Questions Call 1-888-882-1350