



PUTTING GREEN LIGHTS PGL-02-SERIES


SPECIFICATIONS

CONSTRUCTION: PGL-02-BRS: Stamped brass body and cover,
PGL-02: extruded aluminum body and cover
STEM: 25" stem, threaded 1/2" NPS
LENS: Clear tempered glass
LAMP: 35w T4 double contact (DC) halogen, 50 watt maximum
SOCKET: (Ba15d) brass/nickel plated screw shell, ceramic contacts with 200°C lead wires
LAMP LIFE: 2000 hours average rating
MOUNTING-PGL-02-BRS: FA-03-BRS 9" brass stake threaded 1/2" NPS
PGL-02: FA-03 black 9" ABS stake threaded 1/2" NPS
WIRING: Black 3 foot 18/2 zip cord
CONNECTION: FA-05 Quick Connector (not supplied) from fixture to main cable (12/2, 10/2 or 8/2 only)
FINISH-PGL-02-BRS: Unfinished brass, **PGL-02:** Black texture polyester powder coat-optional finishes available


ORDERING INFORMATION

CATALOG NO.	DESCRIPTION	MATERIAL
PGL-02	12v. Putting Green Light (DL-04 head)	Aluminum
PGL-02-BRS	12v. Putting Green Light (DL-04 head)	Brass


10,000 HOUR
XENON
&
HALOGEN
AVAILABLE

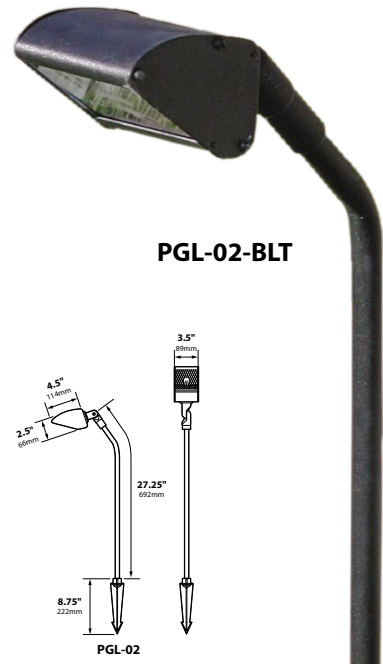

LIGHT DISTRIBUTIONS AND PHOTOMETRICS



PGL-02 Light Distribution



35 watt T-4/D.C. Base Halogen
(FL-19-35W-DC)
PGL-02



JOB INFORMATION

Type:	Date:
Job Name:	
Cat. No.:	
Lamp(s):	
Specifier:	
Contractor:	
Notes:	

FOCUS INDUSTRIES INC.
25301 COMMERCE DRIVE
LAKE FOREST, CA 92630

www.focusindustries.com
sales@focusindustries.com
(949) 830-1350 • FAX (949) 830-3390

FSA-00

Powder Coat Finishes	Black Texture (Standard)	Antique Verde	Bronze Texture	Camel	White Texture	Hunter Texture	Rust	Weathered Iron	Weathered Brown	Stucco	Rubbed Verde	Chrome Powder	Terra Cotta
Ordering Code	-BLT	-ATV	-BRT	-CAM	-WTX	-HTX	-RST	-WIR	-WBR	-STU	-RBV	-CPR	-TRC




FOCUS[™]
INDUSTRIES

INSTALLATION INSTRUCTIONS (12V) FOR AREA & PATH LIGHT FIXTURES

Inspected by

1) Thread Mounting device onto base of fixture. If using FA-03, FA-03-LG or FA-04, press into ground and connect to main cable using FA-05 Quick Connector (See Instructions). If using FA-01, make sure the base PVC is free of dirt/debris to allow the inner tube adjustment as needed. A set screw is provided to set desired height. If using FA-25, you must dig a 6"-8" dia. hole, 10"-14" deep. Loop main cable into stake or run fixture wire out of bottom to main cable. Make connection with FA-05 then back fill hole and wiring. If using FA-22, 24, or 24-LG canopies, secure w/appropriate screws for mounting surface.

2) All 12v Area/Path lights are supplied with lamps installed. To remove single contact lamps, turn off power, let cool down, push & turn counter clockwise, then pull outward and away from socket. For T-3 bi-pin Halogen, Xenon and Compact Fluorescent lamps: turn power off, let cool down, pull outward and away from socket. It is recommended to lubricate single contact lamp base w/dielectric or lithium grease for ease of service and future maintenance.

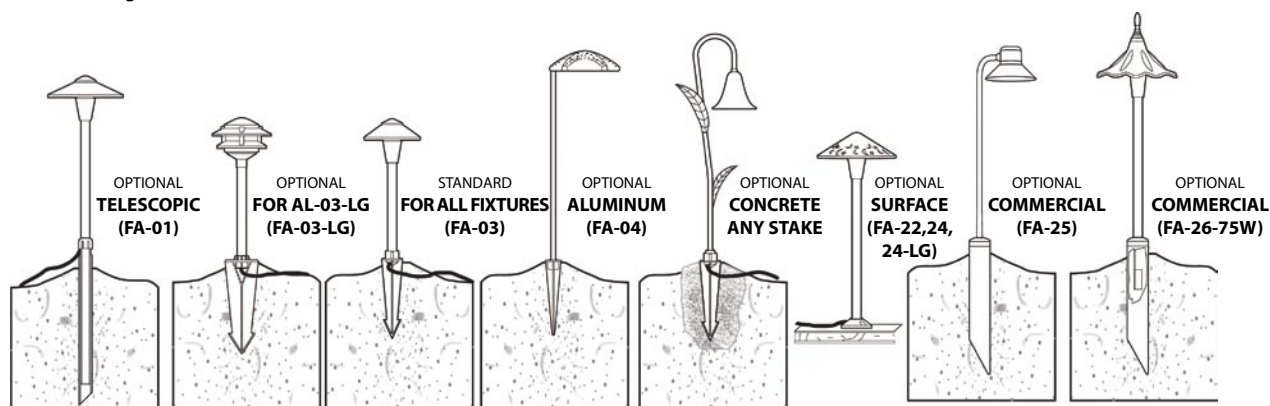

NOTE: All mounting stakes can be pressed or hammered into the ground with a standard hammer or rubber mallet. A small block of wood is recommended to give you a larger surface to pound. Always leave the top 1" section of the stake above ground to help isolate the metal from potentially corrosive soils. Fixture wire (18/2) should be buried underground to prevent detachment & have a cleaner look. For a more permanent mount, you can set the stake in concrete or use FA-25 commercial mounting pedestal.

IMPORTANT SAFETY INSTRUCTIONS TO REDUCE THE RISK OF FIRE AND INJURY TO PERSONS:

- 1) Lamp gets hot quickly; turn off/unplug/ disconnect and allow to cool down before replacing the bulb.
- 2) DO NOT touch hot lens, guard or enclosure
- 3) DO NOT look into lamp when on
- 4) Keep lamp away from materials that may burn
- 5) Use only with wattage/lamp marked on fixture warning or instructions.
- 6) Use right light bulb base w/right socket
- 7) DO NOT touch the lamp at any time. Use a lint-free cloth when handling bulb as oil from skin may damage lamp and shorten lamp life.
- 8) DO NOT operate fixture with missing/ damaged shield.

For Questions Call 1-888-882-1350