



HANGING FIXTURES SL-15-SERIES

SPECIFICATIONS

CONSTRUCTION: Hanging cast aluminum cylinder, 18" long baby oval brass chain with cast brass hoop

SOCKET: Single contact bayonet, brass nickel plated screw shell (Ba15s) with 200°C lead wires

WIRING: Black 2 foot 18/2 zip cord. Consult factory for additional lengths

MOUNTING: FA-111-SM-H hanging fixture mini junction box

FINISH: Optional finishes available

ORDERING INFORMATION

CATALOG NO.	DESCRIPTION	STANDARD FINISH
-------------	-------------	-----------------

The following fixtures are equipped with 18 watt (#1141) lamp, 25w maximum


SL-15	Extruded aluminum hanging cylinder with starlight holes	Black texture
SL-15-BRS	Extruded brass hanging cylinder with starlight holes	Unfinished brass
SL-15-COP	Rolled/stamped copper hanging cylinder, brass top, starlight holes	Unfinished copper

10,000 HOUR
XENON
&
HALOGEN
AVAILABLE





SL-15


LIGHT DISTRIBUTIONS AND PHOTOMETRICS

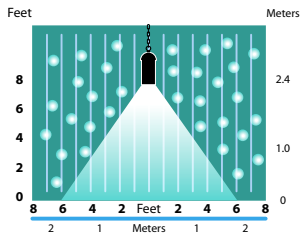

SL-15 Light Distribution



FA-111-SM-H



SL-15



JOB INFORMATION

Type:	Date:
Job Name:	
Cat. No.:	
Lamp(s):	
Specifier:	
Contractor:	
Notes:	

12v. fixtures: 25 foot 16/2 fixture lead wire available; add **-25F** to catalog number.
For use with Focus CPC or hub supplied by others.

FSA-00

FOCUS INDUSTRIES INC.
25301 COMMERCENTRE DRIVE
LAKE FOREST, CA 92630

www.focusindustries.com
sales@focusindustries.com
(949) 830-1350 • FAX (949) 830-3390

Powder Coat Finishes	Black Texture (Standard)	Antique Verde	Bronze Texture	Camel	White Texture	Hunter Texture	Rust	Weathered Iron	Weathered Brown	Stucco	Rubbed Verde	Chrome Powder	Terra Cotta
Ordering Code	-BLT	-ATV	-BRT	-CAM	-WTX	-HTX	-RST	-WIR	-WBR	-STU	-RBV	-CPR	-TRC




FOCUS[™]
INDUSTRIES

INSTALLATION INSTRUCTIONS (12V) FOR SL-15 HANGING LIGHT FIXTURES

Inspected by

- 1) Using Junction Box as a template mark holes to attach to surface. Drill hole if necessary.
- 2) Bring in 12v supply wire through liquid tight connector and wire to 18/2c zip cord using blue wirenuts provided.
- 3) Attach/screw box to surface with appropriate fastner. Wire supply wire to 12v and check for proper installation.

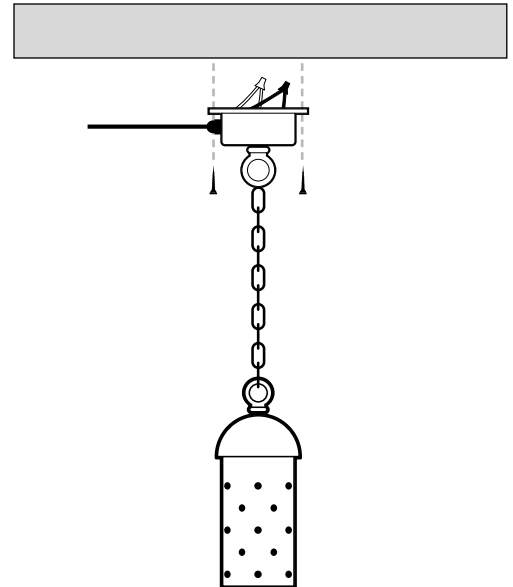

For Questions Call 1-888-882-1350