



SURFACE AND DIRECTIONAL LIGHTS SL-27-SERIES

SPECIFICATIONS

CONSTRUCTION: Heavy-duty spun aluminum, brass, or copper mini down lights, adjustable aiming bracket on -AB models

SOCKET: Double contact bayonet, Ba15d brass nickel plated screw shell and spring; ceramic contact

WIRING: Black 3 foot 18/2 zip cord

MOUNT: FA-111-SM surface mount

FINISH: Optional finishes available

ORDERING INFORMATION

CATALOG NO.	DESCRIPTION	STANDARD FINISH
-------------	-------------	-----------------


ALR12 FIXTURES

The following fixtures are equipped with 20 watt ALR12 FL (GBF) lamp, double contact base, 20 watt maximum. 4000 hours average rating.

SL-27	Halogen spun aluminum adjustable surface light	Black texture
SL-27-BRS	Halogen spun brass fixture adjustable surface light	Unfinished brass
SL-27-COP	Halogen spun copper fixture adjustable surface light	Unfinished copper




SL-27-BRS



SL-27

LIGHT DISTRIBUTIONS AND PHOTOMETRICS

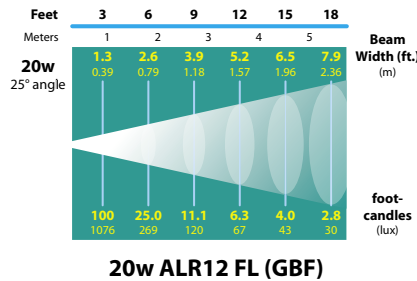

JOB INFORMATION

Type:	Date:
Job Name:	
Cat. No.:	
Lamp(s):	
Specifier:	
Contractor:	
Notes:	

12v. fixtures: 25 foot 16/2 fixture lead wire available; add -25F to catalog number. For use with Focus CPC or hub supplied by others.

FSA-00

Powder Coat Finishes	Black Texture (Standard)	Antique Verde	Bronze Texture	Camel	White Texture	Hunter Texture	Rust	Weathered Iron	Weathered Brown	Stucco	Rubbed Verde	Chrome Powder	Terra Cotta
Ordering Code	-BLT	-ATV	-BRT	-CAM	-WTX	-HTX	-RST	-WIR	-WBR	-STU	-RBV	-CPR	-TRC

FOCUS INDUSTRIES INC.
25301 COMMERCENTRE DRIVE
LAKE FOREST, CA 92630

www.focusindustries.com
sales@focusindustries.com
(949) 830-1350 • FAX (949) 830-3390




FOCUS[™]
INDUSTRIES

**INSTALLATION INSTRUCTIONS (12V)
FOR SL-27 SURFACE AND DIRECTIONAL FIXTURES**

Inspected by

- 1) Using Junction Box as a template mark holes to attach to surface. Drill hole if necessary.
- 2) Bring in 12v supply wire through liquid tight connector and wire to 18/2c zip cord using blue wirenuts provided.
- 3) Attach/screw box to surface with appropriate fastener. Wire supply wire to 12v and check for proper installation.

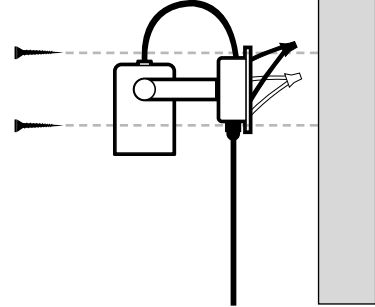

For Questions Call 1-888-882-1350