



# SURFACE AND DIRECTIONAL LIGHTS SL-28-SERIES

## SPECIFICATIONS

**CONSTRUCTION:** Heavy-duty spun aluminum, brass, or copper mini down lights, adjustable aiming bracket on -AB models

**SOCKET:** Double contact bayonet, Ba15d brass nickel plated screw shell and spring; ceramic contact

**WIRING:** Black 3 foot 18/2 zip cord

**MOUNT:** FA-111-SM surface mount

**FINISH:** Optional finishes available

## ORDERING INFORMATION

CATALOG NO.	DESCRIPTION	STANDARD FINISH
-------------	-------------	-----------------

### ALR18 FIXTURES



The following fixtures are equipped with 50 watt ALR18 FL (GBK) lamp, double contact base, 50 watt maximum. 4000 hours average rating.

<b>SL-28</b>	Halogen spun aluminum adjustable surface light	Black texture
<b>SL-28-BRS</b>	Halogen spun brass fixture adjustable surface light	Unfinished brass
<b>SL-28-COP</b>	Halogen spun copper fixture adjustable surface light	Unfinished copper



**SL-28-COP**

## LIGHT DISTRIBUTIONS AND PHOTOMETRICS

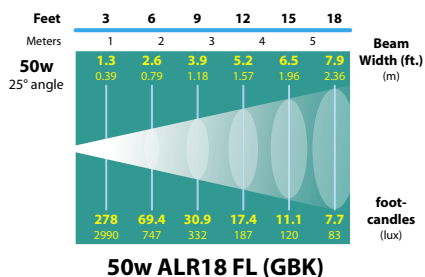

**SL-28**



### JOB INFORMATION

Type:	Date:
Job Name:	
Cat. No.:	
Lamp(s):	
Specifier:	
Contractor:	
Notes:	

**FOCUS INDUSTRIES INC.**  
25301 COMMERCE DRIVE  
LAKE FOREST, CA 92630

[www.focusindustries.com](http://www.focusindustries.com)  
[sales@focusindustries.com](mailto:sales@focusindustries.com)  
(949) 830-1350 • FAX (949) 830-3390

**12v. fixtures:** 25 foot 16/2 fixture lead wire available; add -25F to catalog number.  
For use with Focus CPC or hub supplied by others.

FSA-00

Powder Coat Finishes	Black Texture (Standard)	Antique Verde	Bronze Texture	Camel	White Texture	Hunter Texture	Rust	Weathered Iron	Weathered Brown	Stucco	Rubbed Verde	Chrome Powder	Terra Cotta
Ordering Code	-BLT	-ATV	-BRT	-CAM	-WTX	-HTX	-RST	-WIR	-WBR	-STU	-RBV	-CPR	-TRC




**FOCUS™**  
INDUSTRIES

## INSTALLATION INSTRUCTIONS (12V) FOR SL-28 SURFACE AND DIRECTIONAL FIXTURES

Inspected by

- 1) Using Junction Box as a template mark holes to attach to surface. Drill hole if necessary.
- 2) Bring in 12v supply wire through liquid tight connector and wire to 18/2c zip cord using blue wirenuts provided.
- 3) Attach/screw box to surface with appropriate fastner. Wire supply wire to 12v and check for proper installation.

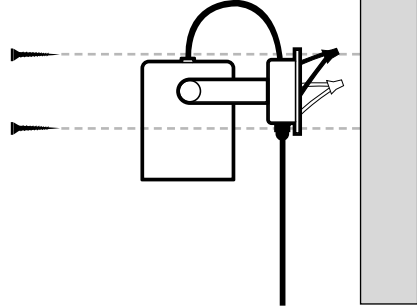

**For Questions Call 1-888-882-1350**