



WALL MOUNTING LIGHTS SL-06-WM-SERIES

SPECIFICATIONS

CONSTRUCTION-SL-06-WM-BRS: Cast brass

SL-06-WM: Cast aluminum

LAMP: 18 watt, S-8 #1141 (25 watt max.)

LAMP LIFE: 1200 hours average rating for S-8 #1141

SOCKET: Single contact bayonet, brass nickel plated screw shell (Ba15s)
200°C silicone lead wires

WIRING: Black 5 foot 18/2 zip cord

MOUNTING: Back plate and screws supplied

FINISH: Optional finishes available

ORDERING INFORMATION


CATALOG NO.	DESCRIPTION	MATERIAL
SL-06-WM	4.5" Tulip Hat	Aluminum
SL-06-WM-BRS	4.5" Tulip Hat	Brass

10,000 HOUR
XENON
&
HALOGEN
AVAILABLE




SL-06-WM-BRS

LIGHT DISTRIBUTIONS AND PHOTOMETRICS

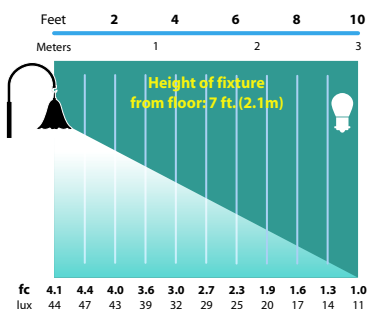


SL-06-WM

Half Spread Photometrics
10 ft. (3.0m) radius

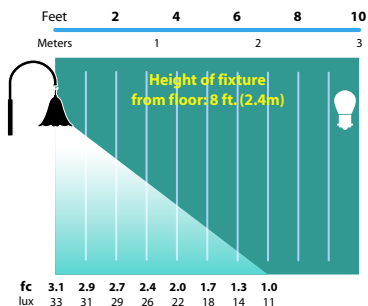

SL-06-WM

Half Spread Photometrics
7 ft. (2.1m) radius



SL-06-WM



JOB INFORMATION

Type:	Date:
Job Name:	
Cat. No.:	
Lamp(s):	
Specifier:	
Contractor:	
Notes:	

FOCUS INDUSTRIES INC.
25301 COMMERCENTRE DRIVE
LAKE FOREST, CA 92630

www.focusindustries.com
sales@focusindustries.com
(949) 830-1350 • FAX (949) 830-3390

FSA-00

Powder Coat Finishes	Black Texture (Standard)	Antique Verde	Bronze Texture	Camel	White Texture	Hunter Texture	Rust	Weathered Iron	Weathered Brown	Stucco	Rubbed Verde	Chrome Powder	Terra Cotta
Ordering Code	-BLT	-ATV	-BRT	-CAM	-WTX	-HTX	-RST	-WIR	-WBR	-STU	-RBV	-CPR	-TRC



FOCUS™
INDUSTRIES

INSTALLATION INSTRUCTIONS FOR SURFACE DIRECTIONAL AND WALL MOUNT LIGHT FIXTURES (12v)


Inspected by

1. Attach mounting plate to surface using 3 screws provided.
- NOTE:** Mounting pegs should be aligned vertically.
2. Wire to 12v power source and attach wall bracket to mounting plate with thumb screws provided.
3. Check for proper installation.

LAMP INSTALLATION/REPLACEMENT


CAUTION: Do not exceed maximum wattage marked on fixture label.

1. Turn off power to fixture.
2. Loosen on side side of cap and remove cap.
3. Push lamp into socket while turning counter clockwise to remove lamp.
4. To re-install: Push lamp in and turn clock wise.
5. Re-install cover and tighten side screws.
6. Turn on power to check for proper operation.

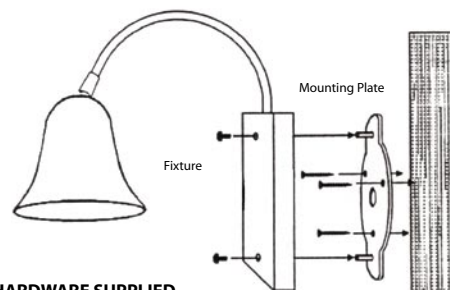

HARDWARE SUPPLIED

- (1) Mounting Plate w/Aluminum Spacer
- (3) #6 x 1 1/4" PBEL-DWSCR
- (2) 8/32" x 1/4" Thumbscrews

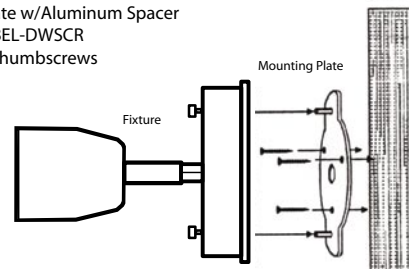

NOTE: Must be installed by a licensed electrician per local codes
For Questions Call 1-888-882-1350