



# WELL LIGHTS SL-03-SERIES

## SPECIFICATIONS

**CONSTRUCCION:** Black ABS plastic, **-SP7** suffix denotes cast aluminum fixture, 30° angle cut  
**LAMP SUPPLIED:** 20 watt MR16 FL (BAB) (35 watt max.)  
**LAMP SOCKET:** GU 5.3 bi-pin with 250° lead wires  
**LAMP LIFE:** 5000 hours average rating  
**WIRING:** Black 4 foot 18/2 zip cord  
**CONNECTION:** FA-05 Quick Connector (not supplied) from fixture to main cable (12/2, 10/2 or 8/2 only)  
**FINISH:** Optional finishes available



SL-03

SL-03-AC-EC



## ORDERING INFORMATION

**CATALOG NO. DESCRIPTION STANDARD FINISH**

Add **-SP7** suffix to catalog numbers below for aluminum housing in place of ABS housing.

SL-03	Well Light with glass lens and aluminum lens holder	Black texture
SL-03-AC	Well Light with angle cut housing	Black texture
SL-03-EC-AC	Well Light with angle cut housing, angle cap	Black texture
SL-03-BRS	Brass Well Light with glass lens and brass lens holder	Unfinished brass
SL-03-AC-BRS	Brass Well Light with angle cut housing	Unfinished brass
SL-03-EC-AC-BRS	Brass Well Light with angle cut housing, brass angle cap	Unfinished brass

## LIGHT DISTRIBUTIONS AND PHOTOMETRICS

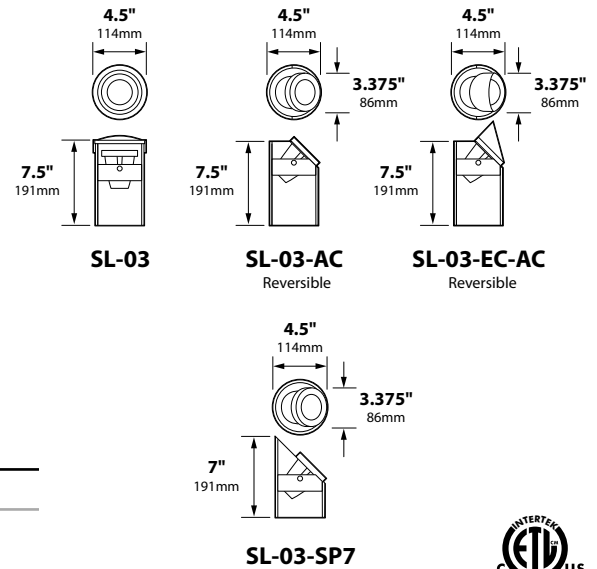

## ACCESSORIES

FA-08-21	Round 1/8" Hex Cell Louver
FA-11-BLUE	Blue Tempered Glass Lens
FA-11-GREEN	Green Tempered Glass Lens
FA-15	Clear Tempered Convex Glass Lens
FA-16-BLUE	Blue Tempered Convex Glass Lens
FA-16-GREEN	Green Tempered Convex Glass Lens
FA-17-CLEAR	Tempered Glass Lens and Cast Aluminum Holder Set
FA-17-BLUE	Blue Tempered Glass Lens and Cast Aluminum Holder Set
FA-17-GREEN	Green Tempered Glass Lens and Cast Aluminum Holder Set
FA-17-BRS-CLEAR	Clear Tempered Glass Lens and Cast Brass Holder Set
FA-17-BRS-BLUE	Blue Tempered Glass Lens and Cast Brass Holder Set
FA-17-BRS-GREEN	Green Tempered Glass Lens and Cast Brass Holder Set
FA-17-HOLDER	Cast Aluminum Lens Holder only (black texture)
FA-17-HOLDER-[Color]	Cast Aluminum Lens Holder only with optional powder coat finish.
FA-17-HOLDER-BRS	Cast Brass Lens Holder only
FA-19	Cast Aluminum Grate with set screws (black texture)
FA-19-[Color]	Cast Aluminum Grate, set screws with optional powder coat finish.
FA-19-BRS	Cast Brass Grate with set screws
FA-99	Convex Glass Tempered Lens for internal fixture head

**12v. fixtures:** 25 foot 16/2 fixture lead wire available; add **-25F** to catalog number.  
 For use with Focus CPC or hub supplied by others.

FSA-00



### JOB INFORMATION

Type:	Date:
Job Name:	
Cat. No.:	
Lamp(s):	
Specifier:	
Contractor:	
Notes:	

**FOCUS INDUSTRIES INC.** www.focusindustries.com  
 25301 COMMERCENTRE DRIVE sales@focusindustries.com  
 LAKE FOREST, CA 92630 (949) 830-1350 • FAX (949) 830-3390

Powder Coat Finishes	Black Texture (Standard)	Antique Verde	Bronze Texture	Camel	White Texture	Hunter Texture	Rust	Weathered Iron	Weathered Brown	Stucco	Rubbed Verde	Chrome Powder	Terra Cotta
Ordering Code	-BLT	-ATV	-BRT	-CAM	-WTX	-HTX	-RST	-WIR	-WBR	-STU	-RBV	-CPR	-TRC



**FOCUS**  
INDUSTRIES

## INSTALLATION INSTRUCTIONS

FOR SL-01/SL-03 SERIES, SL-20MR16/PAR36, SL-21 (WELL LIGHTS)

Inspected by

### SL-01:

For SL-01 the Light Bulb is installed. Dig hole approx. 1 ft. Dia x 1 ft. deep. Add 4-6" drainage material. Connect fixture lead wire to main cable w/ FA-05 Quick Connector. After fixture lights, position in hole and backfill remaining drainage material around housing. Leave 1-2 ft. of fixture wire coiled at bottom of fixture for lamp servicing.

To replace lamp, remove assembly from ABS housing, rotate lamp upside down to access wiring. Disconnect lead wires from lamp terminals. Rotate lamp retaining ring cut out w/one of the hex couplers. Press lamp upward. Ring & lamp will release. Reverse above steps to install a new lamp.

### SL-03:

For SL-03, the Light Bulb is NOT installed. Shipped in protective box to avoid damage to MR-16 lamp. You must remove 4 screws and cap to install light bulb. Press MR16 into socket, replace cap and carefully align gasket with body to insure a solid contact seal. Tighten down screws. SL-03 & SL-03-NL are supplied with FA-17-Clear, convex lens & holder. SL-03-AC can accept accessories. When the above is completed, follow the same procedures for digging, backfilling, and connection as SL-01.

### SL-20-MR16/PAR36:


For SL-20-MR16/PAR36 same as SL-03 except 8 stainless steel screws for securing the lens holder to the body. Gasket is formed over the glass and has only one way to fit. the 4' lead wire is supplied out the bottom of fixture with a liquid tight connector. This fixture is commercially acceptable. Same procedures for digging, back-filling and connection as SL-01.

### SL-21


For SL-21 same as SL-01/03 installation except lens cover is pressure fit. No screws and has an inner housing cup that is removed for relamping. Quick lamp installation and relamping. Make sure housing is 3" - 4" above finish grade.

**NOTE:** Well Lights should be installed in a manner that water will drain away from the fixture. The preferred method is with pea gravel or sand. This allows excellent drainage. Fixture must also be positioned where the top edge must be above final grade by a minimum of 1" to prevent water or debris from entering the housing. Well Lights are NOT underwater lights. Do NOT install in low grade areas where water will gather. In turf applications it is best to use 2 x 4s or concrete border to separate grass from fixture to insure proper drainage and prevent lawn equipment from damaging the product. If constant debris/water is a concern, use FOCUS convex lens & holder or lens & grate.


SL-01 Straight Cut Up  
Pea Gravel/Sand



SL-01 Angle Cut Up  
Pea Gravel/Sand




SL-03  
Pea Gravel/Sand



SL-20G-MR-16/PAR36  
Pea Gravel/Sand



SL-21 Straight Up  
Pea Gravel/Sand



SL-21 Tilted  
Pea Gravel/Sand



**WARNING: DO NOT** cover aperture with leaves, mulch, pine straw or any other debris. Possible Fire will occur.