

## Description

The HALO Home Anyplace Bluetooth Dimmer allows for HALO Home Bluetooth Mesh compatible light fixtures to be controlled from a handheld remote controller, through the Bluetooth Mesh connection. The light fixture can be controlled from the remote controller or through the HALO Home mobile app, using a smart phone or other device. The Anyplace Dimmer is designed to connect to the HALO Home Bluetooth Mesh network with no hub or internet connection required.

Catalog #		Type
Project		
Comments		Date
Prepared by		

## Specification Features

### Wireless System

- Utilizes Bluetooth Mesh 4.0
- Wireless range of up to 100 feet (line of sight) to nearest device 2.4GHz signal frequency.

### Features

- Using the HALO Home app and the Anyplace Dimmer, each Bluetooth Mesh lighting fixture has the ability for:
  - On/Off
  - Dimming
- Turn on/off and adjust dim levels using the battery operated switch or via smartphone or tablet equipped with Bluetooth.
- HALO Home RLs dim down to 5%

### Mounting

- Use 2 screws or provided double sided tape to mount to walls

### Compatible Products

- The Anyplace Dimmer must be paired with another HALO Home device.
- Contents:
  - 3 replaceable CR2032 batteries
  - Adhesive mounting tape
  - Mounting screws

### Compliance

- EMI/RFI emissions per FCC 47CFR Part 15 consumer limits

### Warranty


Five year limited warranty, consult website for details.  
[www.eaton.com/lighting/legal](http://www.eaton.com/lighting/legal)



## HALO Home HWAS

### HALO Home Anyplace Bluetooth Dimmer

## Dimensions

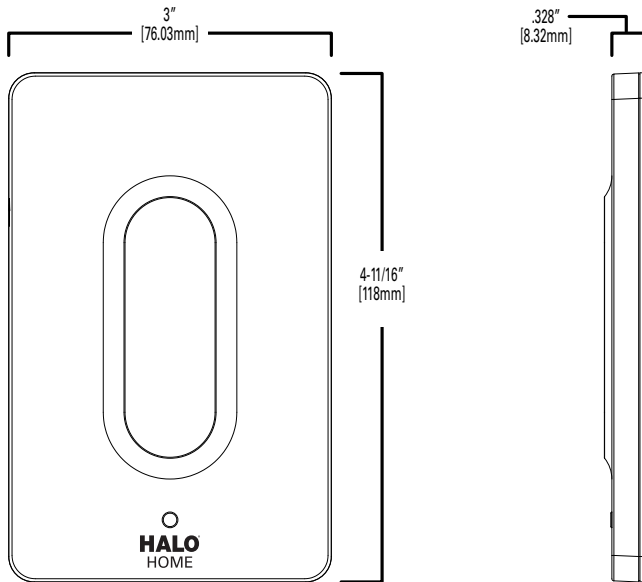

## Ordering Information

**SAMPLE NUMBER:** HWAS1BLE40AWH  
 Must be paired with another HALO Home device.

Device	Protocol	Finish
<b>HWAS1</b> = HALO Home Anyplace Dimmer	<b>BLE40A</b> =Bluetooth wireless mesh 4.0 control	<b>WH</b> =White

## Kit Ordering Information

**SAMPLE NUMBER:** HHA19HWAS1BLE-2PK

Models	Kit Type	Protocol	Number of Lamps	Finish	Voltage
<b>HHA19</b> = HALO Home A19 Lamp	<b>HWAS1</b> =with Anyplace Dimmer	<b>BLE</b> =Bluetooth Mesh wireless control, 4.0	<b>-2PK</b> = 2 Lamps	Gloss White Base	<b>Blank</b> = 120V