

FEATURES & SPECIFICATIONS

INTENDED USE — The Avante 2x4 is a general lighting luminaire for large spaces including open offices, circulation areas, classrooms, libraries, cafeterias, airport ticketing and wait areas, and numerous other commercial applications. Static or air function available. **Certain airborne contaminants can diminish the integrity of acrylic and/or polycarbonate.** [Click here for Acrylic-Polycarbonate Compatibility table for suitable uses.](#)

CONSTRUCTION — Housing is gloss white enamel on **cold-rolled steel**. All edges hemmed or rounded. **All shieldings pivot on light traps and swing down for easy access.**

Molded light traps prevent light leaks between shielding and end-plates.

All air and screw slot units supplied with screw-on tee bar clips. **Driver access is from below.**

OPTICS — Matte white polyester powder paint finished reflectors provide uniform light distribution.

All diffusers control direct light distribution and glare by shielding LEDs from direct view.

Metal diffuser staggered round holes (MDR) **52% open perforated metal** with .075" diameter holes backed with white acrylic diffuser.

Straight blade louver (SBL) sides of perforated metal with staggered round holes and solid blade louvered center. Sides and louver backed with white acrylic diffuser.

Acrylic diffuser prismatic lens (ADP) extruded acrylic lens backed with white acrylic diffuser.

ELECTRICAL — Long-life LEDs, coupled with high-efficiency drivers, provide superior quantity and quality of illumination for extended service life. 90% LED lumen maintenance at 60,000 hours (**L90/60,000**).

eldoLED driver options deliver choice of dimming range and choice of control, while assuring flicker-free, low-current inrush, 89% efficiency and low EMI.

Optional integrated nLight® controls make each luminaire addressable, allowing them to digitally communicate with other nLight enabled controls such as dimmers, switches, nLight AIR RIO. Simply connect all the nLight enabled control devices and the AVLED luminaires using standard Cat-5 cabling, or the nLight AIR wireless network. Unique plug-and-play convenience allows devices and luminaires to automatically discover each other and self-commission.

Lumen Management: Unique lumen management system (option N80) provides onboard intelligence that actively manages the LED light source so that constant lumen output is maintained over the system life, preventing the energy waste created by the traditional practice of over-lighting.

Driver disconnect provided where required to comply with US and Canadian codes.

INSTALLATION — Trims available for standard 1" and 9/16" tee bar or screw slot grids.

Fixtures **can be row mounted end-to-end. Suitable for damp locations.**

Drywall ceiling adapters available.

LISTINGS — CSA certified to meet US and Canadian standards. **IC rated.**

Avante is covered by one or more of the following patents: 5,988,829; 399,586; 411,641; 413,402; 2,212,513; 87,513.

BUY AMERICAN — Product with the **BAA option** is assembled in the USA and meets the Buy America(n) government procurement requirements under FAR, DFARS and DOT. Please refer to www.acuitybrands.com/buy-american for additional information.

WARRANTY — 5-year limited warranty. This is the only warranty provided and no other statements in this specification sheet create any warranty of any kind. All other express and implied warranties are disclaimed. Complete warranty terms located at: www.acuitybrands.com/support/warranty/terms-and-conditions

Note: Actual performance may differ as a result of end-user environment and application.


All values are design or typical values, measured under laboratory conditions at 25 °C.

Specifications subject to change without notice.

Avante SE offers tremendous value while providing a similar aesthetic to the first generation LED Avante - now sold as HE version Avante.

(HE) high efficiency Avante is pictured on the right. Notice both the reflector and diffuser are fully illuminated. If looking to match existing first generation Avante fixtures select this version.

SE (standard efficiency) version pictured left

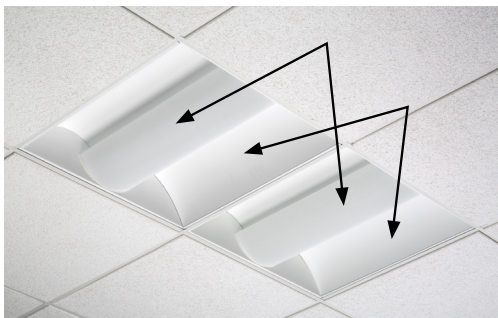

Catalog Number
Notes
Type

Avante
Direct/Indirect Lighting

2AVL4



2' X 4'
LED



eldoLED®

Specifications

Length:	47.75 (121.3)
Width:	23.75 (60.3)
Diffuser width:	8 (20.3)
Depth:	5.5 (14.0)
	5.875 (14.9) for air fixture
Weight:	35 lbs

All dimensions are inches (centimeters) unless otherwise indicated.

CSA+ Capable Luminaire

This item is an A+ capable luminaire, which has been designed and tested to provide consistent color appearance and out-of-the-box control compatibility with simple commissioning.

- All configurations of this luminaire meet the Acuity Brands' specification for chromatic consistency
- This luminaire is part of an A+ Certified solution for nLight® control networks when ordered with drivers marked by a **shaded background***
- This luminaire is part of an A+ Certified solution for nLight control networks, providing advanced control functionality at the luminaire level, when selection includes driver and control options marked by a **shaded background***

To learn more about A+, visit www.acuitybrands.com/aplus.

*See ordering tree for details

2AVL 2x4 Direct/Indirect Lighting



A+ Capable options indicated by this color background.

ORDERING INFORMATION

Lead times will vary depending on options selected. Consult with your sales representative

Example: 2AVL4 40LSE MDR EZ1 LP835

Series	Trim type	Air function	Lumens ¹	Diffuser	Voltage
2AVL4 AV LED	(blank) Grid trim ST Screw slot	(blank) Static (no air function) A Air return/Supply	Standard Efficiency 30LSE 3000 lumens 40LSE 4000 lumens 50LSE 5000 lumens High Efficiency 30LHE 3000 lumens 40LHE 4000 lumens 50LHE 5000 lumens	MDR Metal diffuser, round holes SBL Straight louver, round holes ADP Acrylic diffuser, linear prismatic lens	(blank) MVOLT (120 - 277V) 347 347V ²

Driver	Color temperature	Controls	Options
EZ1 eldoLED dims to 1% (0-10 volt dimming)	LP830 3000 K LP835 3500 K	(blank) No controls N80 nLight® with 80% lumen management	JP10 Palletized job pack, qty. 10 EL7L 700 lumen battery pack (non-CEC compliant) ¹
GZ1 Dims to 1% (0-10V dimming) ³	LP840 4000 K	N80EMG nLight® with 80% lumen management. For use with generator supply EM power	EL14L 1400 lumen battery pack (non-CEC compliant) ¹
GZ10 Dims to 10% (0-10V dimming) ³	LP850 5000 K	N100 nLight® without lumen management N100EMG nLight® without lumen management. For use with generator supply EM power	E10WLCP EM Self-Diagnostic battery pack, 10W Constant Power, CEC compliant
		NLTAIR2 RIO nLight AIR radio module without sensors ⁴	PWS1836 6' pre-wire 3/8" diameter, 18 gauge, 1 circuit
		NLTAIR2 RIOEM nLight AIR radio module less sensor, with UL924 Emergency Operation, via power interrupt detection ⁵	PWS1846 6' pre-wire 3/8" diameter, 18 gauge, 2 circuit
			PWS1846 Two cables: one 6' prewire, 3/8" diameter, 18 gauge, 2 circuits; one 6' pre-wire, 3/8" diameter, 18 gauge
			PWSLV
			PWS1856LV 6' pre-wire, 3/8" diameter, 18 gauge, 1 circuit w/ low voltage wires
			CP Chicago plenum
			BAA Buy America(n) Act Compliant

Accessories: Order as separate catalog number.

DGA24 Drywall ceiling adapter, unit installation. Use G trim plus DGA accessory for fixture trim flange and fixture support in plaster or plasterboard ceilings.

Notes

- 1 Approximate lumen output.
- 2 Not available with, EL7L, EL14L, or E10WLCP options.
- 3 GZ1, GZ10 not available with any Controls options.
- 4 NLTAIR2 RIO available with MDR diffuser only. See UL 924 Sequence of Operation chart on page 3. When combined with the EZ1 option, can be used as a normal power sensing device for nLight AIR devices and luminaires with EM emergency options.
- 5 See UL924 Sequence of Operation chart on page 3.
- 6 Not available with N80, N80EMG, N100, N100EMG, PWS1836, PWS1846, PWS1846 PWSLV or PWS1856LV.

2AVL 2x4 Direct/Indirect Lighting

Performance Data			
Lumen Package	Lumens	Input Watts	LPW
2AVL4 30LSE MDR LP830	2802	36	78
2AVL4 30LSE MDR LP835	2906	36	81
2AVL4 30LSE MDR LP840	3009	36	84
2AVL4 30LSE MDR LP850	3009	36	84
2AVL4 30LHE MDR LP830	2984	30	98
2AVL4 30LHE MDR LP835	3094	30	102
2AVL4 30LHE MDR LP840	3205	30	105
2AVL4 30LHE MDR LP850	3205	30	105
2AVL4 40LSE MDR LP830	3870	47	81
2AVL4 40LSE MDR LP835	4014	47	85
2AVL4 40LSE MDR LP840	4157	47	88
2AVL4 40LSE MDR LP850	4157	47	88
2AVL4 40LHE MDR LP830	3935	41	96
2AVL4 40LHE MDR LP835	4080	41	100
2AVL4 40LHE MDR LP840	4226	41	103
2AVL4 40LHE MDR LP850	4226	41	103
2AVL4 50LSE MDR LP830	4771	62	78
2AVL4 50LSE MDR LP835	4948	62	80
2AVL4 50LSE MDR LP840	5125	62	83
2AVL4 50LSE MDR LP850	5125	62	83
2AVL4 50LHE MDR LP830	4870	50	97
2AVL4 50LHE MDR LP835	5051	50	100
2AVL4 50LHE MDR LP840	5231	50	104
2AVL4 50LHE MDR LP850	5231	50	104

How to Estimate Delivered Lumens in Emergency Mode

Use the formula below to estimate the delivered lumens in emergency mode

$$\text{Delivered Lumens} = 1.25 \times P \times \text{LPW}$$

P = Output power of emergency driver. P = 10W for E10WLCP option.

LPW = Lumen per watt rating of the luminaire. This information is available on the ABL luminaire spec sheet.

LPW = Lumen per watt rating of the luminaire. LPW information available in Performance Data section.

UL924 Sequence of Operation


The below information applies to all nLight AIR devices with an EM option.

- EM devices will remain at their high-end trim and ignore wireless lighting control commands, unless a normal-power-sensed (NPS) broadcast is received at least every 8 seconds.
- Using the CLAIRITY+ mobile app, EM devices must be associated with a group that includes a normal power sensing device to receive NPS broadcasts.
- Only non-emergency rPP20, rLSXR, rSBOR, rSDGR, and nLight AIR luminaires with version 3.4 or later firmware can provide normal power sensing for EM devices. See specification sheets for control devices and luminaires for more information on options that support normal power sensing.

2AVL 2x4 Direct/Indirect Lighting

MOUNTING DATA


Ceiling Type	Appropriate Trim Type
Exposed grid tee (1" and 9/16")	G
Concealed grid tee	G
Screw slot	ST
Plaster or plasterboard	G*

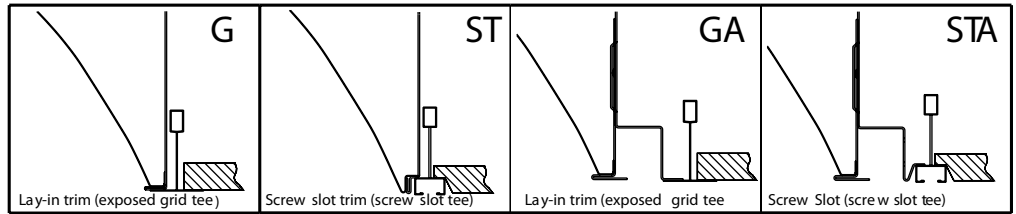


*DGA accessory available to provide ceiling trim flange and fixture support for plaster or plasterboard ceiling. Recommended rough-in dimensions for DGA installation is 24-3/4" x 48-3/4" (Tolerance is +1/8", -0").

PHOTOMETRICS

2AVL4 30LHE MDR LP835, 3094 delivered lumens

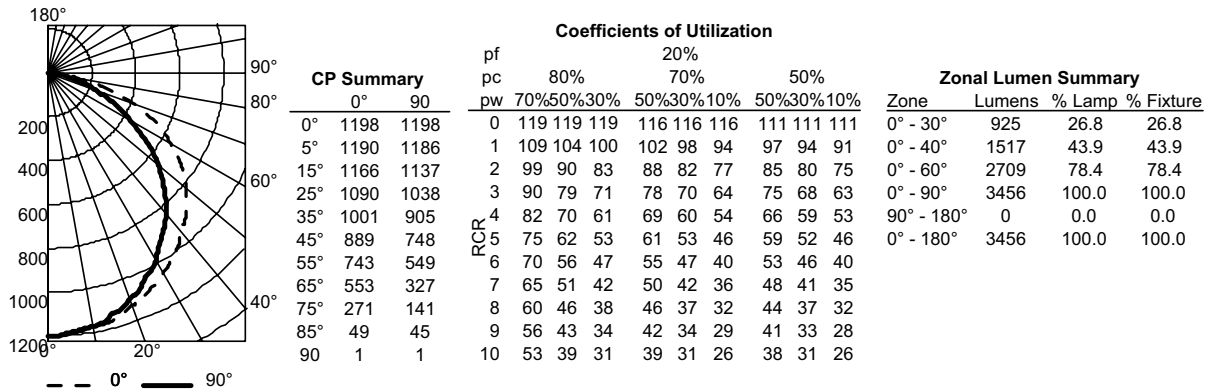

2AVL4 40LHE MDR LP835, 4006 delivered lumens

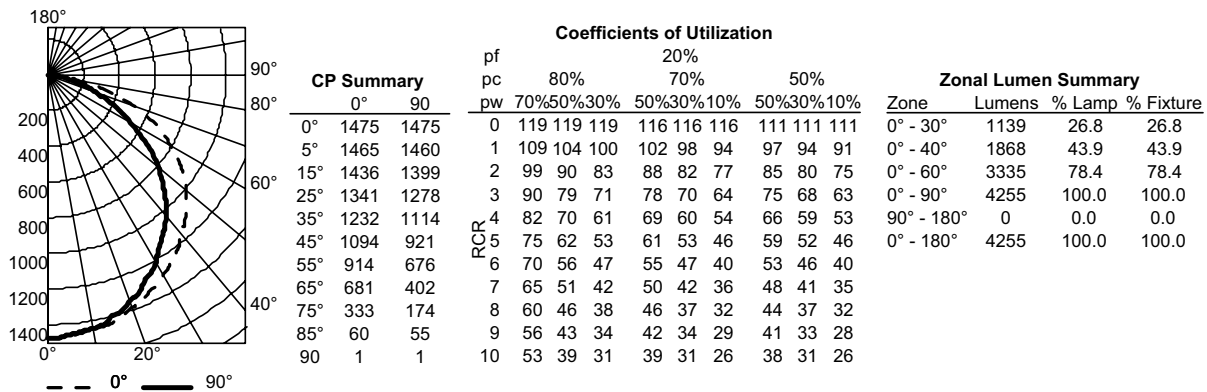

2AVL4 50LHE MDR LP835, 5050 delivered lumens

