



UNDERWATER LIGHTS SL-11-SERIES


SPECIFICATIONS

- CONSTRUCTION:** Solid cast brass (unfinished) with black O-ring in base of casting with spun brass retaining ring
- AIMING BRACKET (SL-11-AB only):** Solid cast brass with black thumbscrews
- LENS:** High impact clear acrylic
- LAMP:** 25 watt PAR36 VWFL (50 watt max.)
- SOCKET:** 2-screw terminal or slip-on 1/4" male disconnect
- LAMP LIFE:** 2000 hours average rating
- WIRING:** 15 feet 18/2 SJT-WA cord (available up to 100 feet)
- CONNECTION:** FA-05 Quick Connector (not supplied) from main 12/2, 10/2 or 8/2 cable (12 volt only)
- CORD CONNECTOR:** Brass nickel-plated liquid tight straight bushing
- MOUNTING:** Flush on bottom surface
- STANDARD FINISH:** Unfinished brass, available with Black Acid Treatment. Add **-BAT** to catalog number


ORDERING INFORMATION

CATALOG NO.	DESCRIPTION
SL-11	Die-cast brass Underwater light
SL-11-AB	Die-cast brass Underwater light with adjustable aiming bracket

LIGHT DISTRIBUTIONS AND PHOTOMETRICS

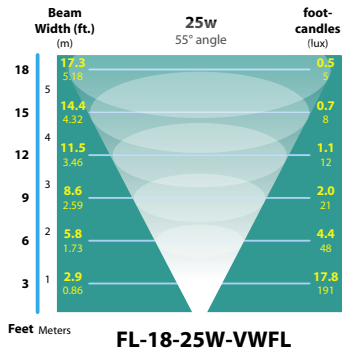

SL-11-BAT

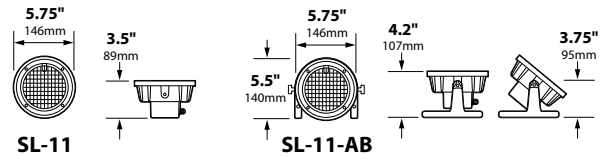

SL-11-AB

ACCESSORIES



- FA-35-BLUE** Blue Tempered Glass Lens
- FA-35-GREEN** Green Tempered Glass Lens
- FA-35-RED** Red Tempered Glass Lens
- FA-35-AMBER** Amber Tempered Glass Lens
- FA-105** Brass Adjustable Aiming Bracket with black thumbscrews
- FA-137** For additional cord length, add length in feet to catalog number (50' maxi.)

12v. fixtures: 25 foot 16/2 fixture lead wire available; add **-25F** to catalog number. For use with Focus CPC or hub supplied by others.

FSA-00

Powder Coat Finishes	Black Texture (Standard)	Antique Verde	Bronze Texture	Camel	White Texture	Hunter Texture	Rust	Weathered Iron	Weathered Brown	Stucco	Rubbed Verde	Chrome Powder	Terra Cotta
Ordering Code	-BLT	-ATV	-BRT	-CAM	-WTX	-HTX	-RST	-WIR	-WBR	-STU	-RBV	-CPR	-TRC

JOB INFORMATION

Type:	Date:
Job Name:	
Cat. No.:	
Lamp(s):	
Specifier:	
Contractor:	
Notes:	

FOCUS INDUSTRIES INC.
25301 COMMERCE DRIVE
LAKE FOREST, CA 92630

www.focusindustries.com
sales@focusindustries.com
(949) 830-1350 • FAX (949) 830-3390



FOCUS™
INDUSTRIES

INSTALLATION INSTRUCTIONS (12v)
FOR SL-11, SL-40 UNDERWATER LIGHT FIXTURES

Inspected by

Without Aiming Bracket

- 1) Install fixture into pond/fountain using rocks to keep fixture in place.
- 2) Route wire out of water and connect to 12v power supply per local code. Check for proper operation.


With Aiming Bracket (-AB)

- 1) Install fixture into pond/fountain, adjust aiming bracket to desired angle. Note: (3) holes in Aiming bracket can be used to attach/screw to surface.
- 2) Route wire out of water and connect to 12v power supply per local code. Check for proper operation.

LAMP INSTALLATION/REPLACEMENT

CAUTION: Do not exceed maximum wattage marked on fixture label.

- 1) Remove fixture from water.
- 2) Remove screws on front cover. Remove cap. Remove lamp & replace with same wattage/type. Ensure gasket is in good condition & replace cover and screw in place. Reinstall in pond and check for proper installation.

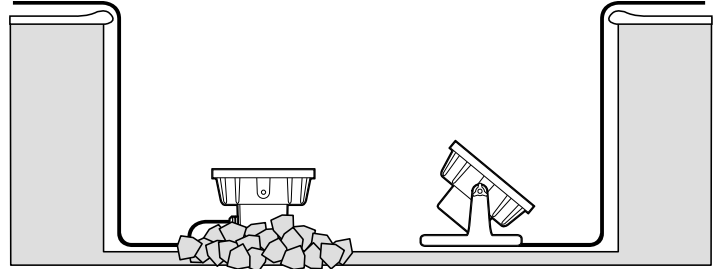

For Questions Call 1-888-882-1350