



WELL LIGHTS SL-01- SERIES

SPECIFICATIONS

CONSTRUCTION: Black ABS plastic; SL-01-SP7 housing is aluminum

LAMP: 36 watt PAR36 QWFL halogen

SOCKET: 1/4" female disconnect

LAMP LIFE: 4000 hours average rating

WIRING: Black 4 foot 18/2 zip cord


CONNECTION: FA-05 Quick Connector (not supplied) from fixture to main cable (12/2, 10/2 or 8/2 only)

FINISH: Optional finishes available

ORDERING INFORMATION

CATALOG NO.	DESCRIPTION	LAMP SUPPLIED	STANDARD FINISH
SL-01	ABS Well Light, aluminum lamp holder	36w PAR36 (QWFL)	Black
SL-01-BRS	ABS Well Light, brass lamp holder	36w PAR36 (QWFL)	Unfinished brass
SL-01-4414	ABS Well Light, aluminum lamp holder	18w PAR36 (MFL)	Black
SL-01-25W-VWFL	ABS Well Light, aluminum lamp holder	25w PAR36 (VWFL)	Black
SL-01-SS	ABS Well Light, stainless steel lamp holder	36w PAR36 (QWFL)	Stainless steel
SL-01-SP	ABS Well Light, 30° Angle Cut, aluminum lamp holder	36w PAR36 (QWFL)	Black
SL-01-SP-BRS	ABS Well Light, 30° Angle Cut, brass lamp holder	36w PAR36 (QWFL)	Black
SL-01-SP-SS	ABS Well Light, 30° Angle Cut, stainless steel lamp holder	36w PAR36 (QWFL)	Black
SL-01-SP7	Aluminum Well Light, 30° Angle Cut, alum. lamp holder	36w PAR36 (QWFL)	Black texture
SL-01-SP7-[Color]	Aluminum Well Light, 30° Angle Cut, alum. lamp holder	36w PAR36 (QWFL)	[Color]

LIGHT DISTRIBUTIONS AND PHOTOMETRICS

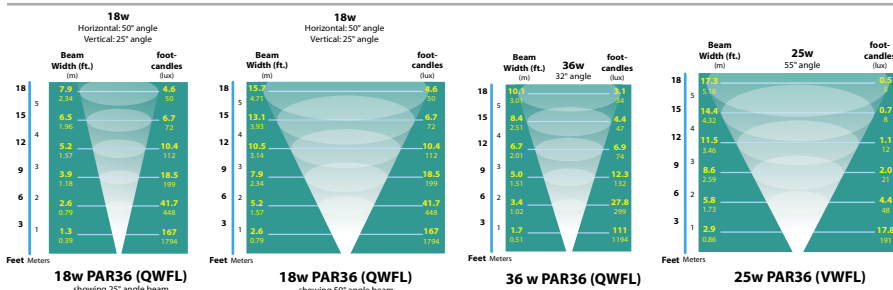

ACCESSORIES

RECOMMENDED ENHANCEMENTS FOR SL-01 SERIES:

For SL-01, SL-01-4414, SL-01-25W-VWFL only:

FA-12	Clear Convex Tempered Glass Lens
FA-13-BLUE	Blue Convex Tempered Glass Lens
FA-13-GREEN	Green Convex Tempered Glass Lens
FA-14-CLEAR	Clear Convex Tempered Glass Lens, Cast Alum. Holder Set
FA-14-BLUE	Blue Convex Tempered Glass Lens, Cast Alum. Holder Set
FA-14-GREEN	Green Convex Tempered Glass Lens, Cast Alum. Holder Set
FA-14-BRS-CLEAR	Clear Convex Tempered Glass Lens, Cast Brass Holder Set
FA-14-BRS-BLUE	Blue Convex Tempered Glass Lens, Cast Brass Holder Set
FA-14-BRS-GREEN	Green Convex Tempered Glass Lens, Brass Cast Holder Set
FA-14-HOLDER	Cast Aluminum Lens Holder only
FA-14-HOLDER-[Color]	Cast Aluminum Lens Holder only with powder coat option
FA-14-HOLDER-BRS	Cast Brass Lens Holder only
FA-20	Cast Aluminum Grate with set screws
FA-20-[Color]	Cast Aluminum Grate, set screws and powder coat options
FA-20-BRS	Cast Brass Grate with set screws

For SL-01-SP, SL-01-SP-BRS, SL-01-SP-SS only:


FA-12-SP-FLT	Snap-In Flat Clear Acrylic Lens
FA-12-SP-FLT-GREEN	Snap-In Flat Green Acrylic Lens
FA-12-SP-FLT-RED	Snap-In Flat Red Acrylic Lens

12v. fixtures: 25 foot 16/2 fixture lead wire available; add -25F to catalog number.

For use with Focus CPC or hub supplied by others.

FSA-00

Powder Coat Finishes	Black Texture (Standard)	Antique Verde	Bronze Texture	Camel	White Texture	Hunter Texture	Rust	Weathered Iron	Weathered Brown	Stucco	Rubbed Verde	Chrome Powder	Terra Cotta
Ordering Code	-BLT	-ATV	-BRT	-CAM	-WTX	-HTX	-RST	-WIR	-WBR	-STU	-RBV	-CPR	-TRC

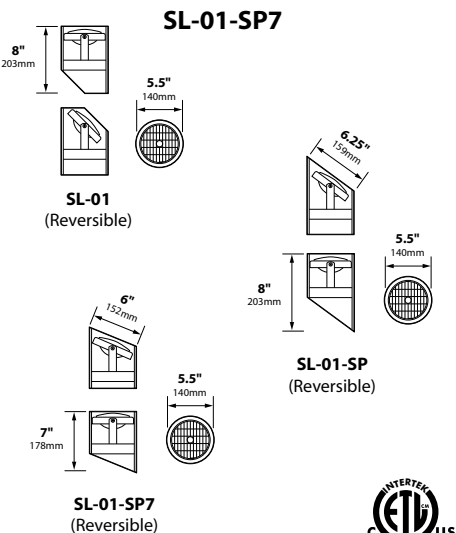

JOB INFORMATION

Type:	Date:
Job Name:	
Cat. No.:	
Lamp(s):	
Specifier:	
Contractor:	
Notes:	

FOCUS INDUSTRIES INC.
25301 COMMERCENTRE DRIVE
LAKE FOREST, CA 92630

www.focusindustries.com
sales@focusindustries.com
(949) 830-1350 • FAX (949) 830-3390



**FOCUS™
INDUSTRIES**

INSTALLATION INSTRUCTIONS

FOR SL-01/SL-03 SERIES, SL-20MR16/PAR36, SL-21 (WELL LIGHTS)

Inspected by

SL-01:

For SL-01 the Light Bulb is installed. Dig hole approx. 1 ft. Dia x 1 ft. deep. Add 4-6" drainage material. Connect fixture lead wire to main cable w/ FA-05 Quick Connector. After fixture lights, position in hole and backfill remaining drainage material around housing. Leave 1-2 ft. of fixture wire coiled at bottom of fixture for lamp servicing.

To replace lamp, remove assembly from ABS housing, rotate lamp upside down to access wiring. Disconnect lead wires from lamp terminals. Rotate lamp retaining ring cut out w/one of the hex couplers. Press lamp upward. Ring & lamp will release. Reverse above steps to install a new lamp.

SL-03:

For SL-03, the Light Bulb is NOT installed. Shipped in protective box to avoid damage to MR-16 lamp. You must remove 4 screws and cap to install light bulb. Press MR16 into socket, replace cap and carefully align gasket with body to insure a solid contact seal. Tighten down screws. SL-03 & SL-03-NL are supplied with FA-17-Clear, convex lens & holder. SL-03-AC can accept accessories. When the above is completed, follow the same procedures for digging, backfilling, and connection as SL-01.

SL-20-MR16/PAR36:


For SL-20-MR16/PAR36 same as SL-03 except 8 stainless steel screws for securing the lens holder to the body. Gasket is formed over the glass and has only one way to fit. the 4' lead wire is supplied out the bottom of fixture with a liquid tight connector. This fixture is commercially acceptable. Same procedures for digging, back-filling and connection as SL-01.

SL-21


For SL-21 same as SL-01/03 installation except lens cover is pressure fit. No screws and has an inner housing cup that is removed for relamping. Quick lamp installation and relamping. Make sure housing is 3" - 4" above finish grade.

NOTE: Well Lights should be installed in a manner that water will drain away from the fixture. The preferred method is with pea gravel or sand. This allows excellent drainage. Fixture must also be positioned where the top edge must be above final grade by a minimum of 1" to prevent water or debris from entering the housing. Well Lights are NOT underwater lights. Do NOT install in low grade areas where water will gather. In turf applications it is best to use 2 x 4s or concrete border to separate grass from fixture to insure proper drainage and prevent lawn equipment from damaging the product. If constant debris/water is a concern, use FOCUS convex lens & holder or lens & grate.

SL-01 Straight Cut Up
Pea Gravel/Sand



SL-01 Angle Cut Up
Pea Gravel/Sand




SL-03
Pea Gravel/Sand



SL-20G-MR-16/PAR36
Pea Gravel/Sand



SL-21 Straight Up
Pea Gravel/Sand



SL-21 Tilted
Pea Gravel/Sand



WARNING: DO NOT cover aperture with leaves, mulch, pine straw or any other debris. Possible Fire will occur.