



LOS800W/277



JOB NAME: _____
 DATE: _____
 TYPE: _____

DESCRIPTION

Fits decorator wall plates with only 1/2" protrusion. 120 volts. Gangable. Full 180° view covers 1000 sq. ft Works with electronic ballasts. Can be wired in parallel. LED indicator, wallplate included. Can also be used as a ceiling sensor. Must have hot, common & ground wires in box.

SPECIFICATIONS

Compatibility:

Compatible with preset dimmers and electronic ballasts. Can be wired in parallel

Maximum Reliability:

Superb small movement sensitivity within 18 feet. LOS1000 has "ZAPS" - Zero Arc Point Switching to protect relay contacts lengthen ballast and sensor life.

UL Listing:

LOS800 & LOS1000: Indoor applications
 Smart Box & Tuff Dome: Wet locations

Adjustments:

Time

Ambient Light Sensing:

n/a

Coverage Area:

1000sf

Detection:

180° view covers 1000 sq. feet

Incandescent & Fluorescent Watts Switched Weight:

1200 watts @ 277 volts

Manual Switch:

On - Manual / Off - Auto

Maximum Energy Savings:

Light only when you need it. No ON switch so lights are never left on by mistake.

Patents:

RAB sensor and fixture designs are protected under U.S. and International Intellectual Property laws.

Power Consumption:

Negligible

Ratings:

4.3 amps

Time Delay:

8 seconds to 15 minutes

Wiring:

Hot & common


Color:

Ivory

Weight:

0.3

DETECTION PATTERN

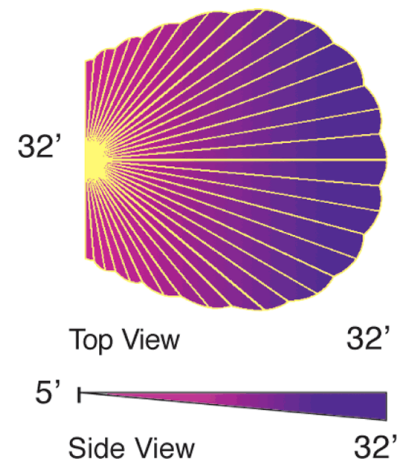

Note: Specifications may change without notice