

RAB LIGHTING STASK12W



JOB NAME: _____

DATE: _____

TYPE: _____

DESCRIPTION

Motion activated task light. 12" long, 8 watt fixture with integrated 180° view sensor that swivels 330°. Sensor can control up to 250 watts fluorescent. Lamps supplied.

SPECIFICATIONS

Detection Zone:

120° by 30', aimable

Fixture Finish:

Bright white epoxy powder coating

Fixture Housing:

Formed sheet metal with translucent styrene lens

Fixture Sockets:

Miniature bi-pin, G5

Lamps Supplied:

T5

Sensor Construction:

Precision molded Lexan

Sensor Wires:

12" long

Time Adjustment:

Adjustable from 5 seconds to 15 minutes

UL Listing:

For indoor applications.

Vandal Resistant Lens:

Hard lens resists vandalism

Voltage:

120 volts AC, 60 Hz

Wall Switch Manual Override:

Two flip logic prevents activation by momentary power outages. Override resets to auto at dawn. No extra wiring needed.

Detection:

180° degree view

Patents:

RAB sensor and fixture designs are protected under U.S. and International Intellectual Property laws.

Switching Capacity:

500 watts Incandescent or 250 watts Fluorescent


Color:

White

Weight:

1

DIMENSIONS

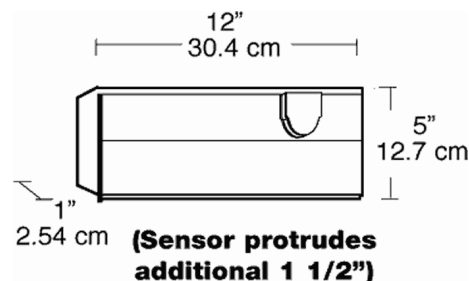

ORDERING INFORMATION

Fluorescent

Lamp supplied with fixture

Total Watts	Lamp Type	Lamp Base	Ballast
8	T5	Min Bi-Pin, G3	NPF 120V

Starting Amps/ Operating Amps			
120V	208V	240V	277V

Input Watts	LAMP ANSI	Initial Lumens	Lamp Hours
0		400	7500

Factory Installed Options

Add suffix to Catalog Number

Note: Specifications may change without notice

RAB Lighting, Inc. • 170 Ludlow Ave • Northvale, NJ 07647 • Tel: 888 RAB-1000 • Fax: 888 RAB-1232 • www.rabweb.com

© 2009