

TC1 Series 4" Incandescent Housing

Non-IC Rated



Features

- 4" Housing
- Detachable medium base porcelain socket with nickel-plated copper screw shell
- Housing is vertically adjustable to accommodate up to a 1 1/4" ceiling thickness
- Steel housing is fully assembled for ease of installation
- Real Nail® 3 bar hangers: telescoping system with pre-installed removable nail for easy repositioning of housing in joist construction • Integral T-bar mounting feature for secure installation in suspended ceilings • Patented breakaway bars for tight joist spacing • Bar hangers may be re-positioned 90° • Curved foot facilitates alignment with joist bottom • Quick-Loc slot and oversized set screw lock fixture in position
- Pre-wired junction box with (5) 1/2" and (1) 3/4" knockouts with pryout slots, (4) non-metallic sheathed cable connectors, and ground wire
- Shadow-free, knife-edge trim design blends smoothly into the ceiling and allows architectural continuity with Aculux® trims
- UL Listed, C-UL/CSA certified for through-branch wiring, maximum (8) #12 AWG minimum 90° C branch circuit conductors (4 in, 4 out)
- Thermally protected against improper use of lamps or insulation
- Lamp wattage ratings and apertures based on trim selection on pages 39-41



Description

Non-IC rated housing • Designed to be installed in non-insulated areas, or where insulation is spaced at least 3" from housing

Listings

UL Listed, C-UL/CSA certified for through-branch wiring, damp and wet locations • Wet location listed with trims 11, 12, 4101, 4102 and 4181 • Wet location listed with trims 14 and 17 with PAR20 outdoor rated lamps • Conforms with City of Chicago IP requirements

Ordering Information



Catalog Number: **TC1**

Catalog Number: **TC1S** - TC1 with smaller footprint bar hanger (Real Nail® 2)

Accessories

Catalog Number	Description
GU10-WHIP	Medium base to GU10 base flexible socket adapter. Use with 10, 440, 445, 446 & 448 trims only.
4TSA	4" Housing Adaptor Converts original 4" housings for optimal retention of push-in style trims.

Dimensions

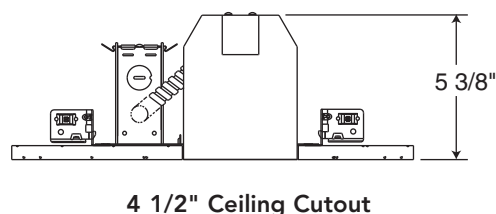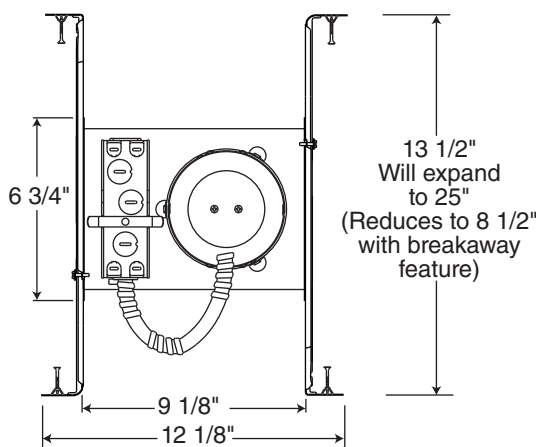

Down-Lites

