



4" MINIATURE UNIVERSAL IC NEW CONSTRUCTION HOUSING

INCANDESCENT LAMPS
ICTW

Project: _____

Fixture Type: _____

Location: _____

Contact/Phone: _____

PRODUCT DESCRIPTION

IC Air-Loc® New Construction Housing with all 4" trims complies with IECC, Washington State and other state Energy Codes

- Double wall construction • Energy efficient, sealed inner housing does not require separate ALG gasket • Air-Loc housing stops infiltration and exfiltration of air, reducing heating and cooling costs • Can be completely covered with insulation.

PRODUCT SPECIFICATIONS

Lamp Lamp ratings based on trim selected – see reverse.

Socket Medium base porcelain with nickel-plated copper screw shell.

Trims Trim selection shown on reverse.

Labels U.L. listed for through-branch wiring, damp locations and IP • Product thermally protected against improper use of lamps • Union made • UL Listed/CSA certified • Trim No. 11, 12, 4101, 4102 and 4181 are wet location approved for covered ceiling applications • Trims 14, 17 are wet location approved for covered ceiling applications, **when used with outdoor rated lamps.**

Testing All reports are based on published industry procedures; field performance may differ from laboratory performance.

Product specifications subject to change without notice.

INSTALLATION

Real Nail 3 Bar Hangers Telescoping Real Nail® 3 system covered under Patent D552,969 permits quick placement of housing anywhere within 24" O.C. joists or suspended ceilings • Integral T-bar notch and clip secures housing in suspended ceiling grid – no accessory clips required • 24" expansion stop allows quick placement of fixture in standard grid spacing • Bars scored in two locations for fast, clean breaking, allowing housing installation in tight applications • Bars captive to mounting frame • Edge-mounted for extra strength • Captive bugle-headed ring shank nail for quick one-step installation and easy removal with claw hammer for fixture relocation • Quick-Loc slot (location identified on the mounting frame) and oversized locking set screw lock fixture in position • Bar hanger foot contoured to align to bottom of construction joist • Alternate mounting holes included.

Junction Box Pre-wired junction box provided with (6) ½" and (1) ¾" knockouts, (4) Non-metallic sheathed cable connectors and ground wire, U.L. listed/CSA certified for through-branch wiring, maximum 8 No. 12 AWG 90° C branch circuit conductors (3 in, 3 out) • Junction box provided with removable access plates • Knockouts equipped with pryout slots • Supplied with **push-in electrical connectors** for fast installation.

Mounting Frame 22-gauge die-formed galvanized steel mounting frame • 9 1/8" L x 6 3/4" W, (excluding bar hangers) • Rough-in section (junction box, mounting frame, housing and bar hangers) fully assembled for ease of installation.



Housing Air-Loc IC housing, .032" aluminum • Inner housing is vertically adjustable to accommodate up to a 1 3/4" ceiling thickness.

PRODUCT CODES

Catalog Number	Input Voltage	Lamp Rating (max.)
ICTW	120V	A19/R14/R16/R20/PAR16/PAR20 (See reverse for max. trim rating)

REV-1/15

DIMENSIONS

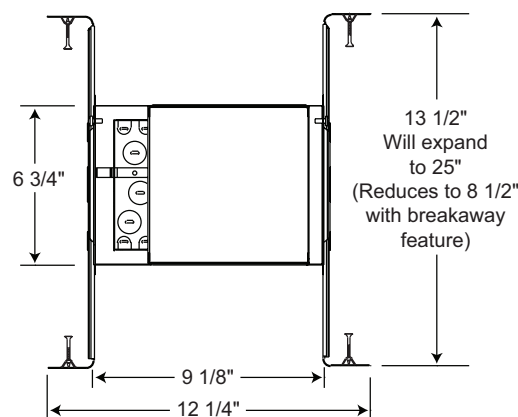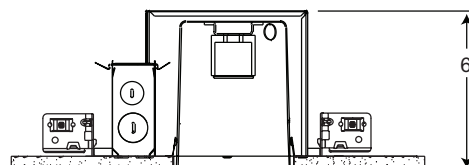

4 1/2" CEILING CUTOUT

ACCESSORIES

Catalog No.	Description
4TSA	Torsion Spring Adapter (for original style housing)
GU10-WHIP	GU10 Socket Whip



To order, specify catalog number.


4" MINIATURE UNIVERSAL IC NEW CONSTRUCTION HOUSING

INCANDESCENT LAMPS

ICTW

ROUND TRIMS/LAMPS

	Cat. No.	Description	Max. Lamp Rating
	 13-WH	2" Pinhole with Integral Shield	30W R20/ 35W PAR20
	14B-WH ◆◆	Black Baffle	50W PAR20/R20
	14B-SC ◆◆	Black Baffle	(Requires T599 Socket
	14B-ABZ ◆◆	Black Baffle	Extender when using
	14B-BL ◆◆	Black Baffle	GE lamps)
	14W-WH ◆◆	White Baffle	
	17C-WH ◆◆	Cone - Clear Alzak®	
	17G-WH ◆◆	Cone - Gold Alzak®	
	17B-WH ◆◆	Cone - Black Alzak®	50W PAR20/R20
	17PT-SC ◆◆	Cone - Pewter Alzak®	
	17W-WH ◆◆	Cone - Gloss White	
	17HZ-WH ◆◆	Cone - Haze	
	17WHZ-WH ◆◆	Cone - Wheat Haze	
	17WHZ-ABZ ◆◆	Cone - Wheat Haze	
	18-WH	Mini Eyeball	60W PAR16
	18-SC	Mini Eyeball	
	19-WH	Mini Eyeball	25W R14/40W R16 intermediate screw base
	440-WH	Flush Gimbal Ring	35W MR16/ ES16 GU10 base (Requires GU10-WHIP)
	440-BL	Flush Gimbal Ring	
	440-SC	Flush Gimbal Ring	
	440-ABZ	Flush Gimbal Ring (New tighter gap, uses 2" optical media)	
	448-WH	Eyeball with Black Baffle	35W MR16/ ES16 GU10 base (Requires GU10-WHIP)
	448-SC	Eyeball with Black Baffle	
	11-WH ◆	Drop Opal	30W R20
	12W-WH ◆	Shower Trim, frosted perimeter lens	30W R20, 50W PAR20
	12W-SC ◆	Shower Trim, frosted perimeter lens	must use T599 Socket Extender
	12W-ABZ ◆	Shower Trim, frosted perimeter lens	
	16-WH	Scoop Wall Wash with higher inner shield	25W R14/40W R16 intermediate screw base

	Cat. No.	Description	Max. Lamp Rating
	4101-WH ◆	Beveled Dome Shower	50W PAR20,
	4101-SC ◆	Beveled Dome Shower	30W R20
	4101-ABZ ◆	Beveled Dome Shower	
	4102-WH ◆	Beveled Shower	50W PAR20,
	4102-SC ◆	Beveled Shower	30W R20
	4102-ABZ ◆	Beveled Shower	
	4103FROST-WH	Beveled Cylinder	50W PAR/R20
	4103FROST-SC	Beveled Cylinder	
	4104HZ-SC	Beveled Cone	50W PAR/R20
	4104WHZ-ABZ	Beveled Cone	
	4150MESH-SC	Cylinder	50W PAR20, 30W R20
	4180FROST	Solid Glass Collar (torsion spring attachment)	50W PAR/R20
	4181CLEAR ◆	All Glass Shower (torsion spring attachment)	35W PAR20, 30W R20

SQUARE TRIMS/LAMPS

	Cat. No.	Description	Max. Lamp Rating
	175Q-HZ-WH ◆◆	Square Downlight	50W PAR20 (Requires T599 socket extender), 39W PAR20, 30W R20
	175Q-W-WH ◆◆		
	175Q-B-WH ◆◆		
	175Q-WHZ-WH ◆◆		
	135Q-WH	Square Pinhole	39W PAR20 (Requires T599 socket extender), 35W PAR20, 30W R20
	440SQ-WH	Square Flush Gimbal	35W MR16 120V GU10 Base (Requires GU10-WHIP) 35° Vertical Adjustment
	440SQ-BL		
	125Q-W-WH ◆	Square Frosted Lens with Clear Center	50W PAR20 (Requires T599 socket extender), 30W R20
	GU10-WHIP	GU10 Socket Whip	

Trim Size: 5" O.D.

Trim Finish: ABZ - Classic Aged Bronze, BL - Black, GP - Graphite, PB - Polished Brass,
PW - Plastic White (Polycarbonate material shower trim), SC - Satin Chrome, SL - Silver, WH - White.
Alzak is a registered trademark of Alcoa Corp.

Note: In Canada when insulation is present, Type IC fixtures must be used.

 JUNO IC housings meet IECC Energy Code requirements per ASTM E283.
Air-Loc® rated trims are pre-gasketed for minimum air leakage with IC housings.

◆ UL Listed for use in wet location.

◆◆ UL Listed for use in wet location with outdoor rated lamp.



1300 S. Wolf Road • Des Plaines, IL 60018 • Phone (847) 827-9880 • Fax (847) 827-2925
220 Chrysler Drive • Brampton, Ontario • Canada L6S 6B6 • Phone (905) 792-7335 • Fax (905) 792-0064
Visit us at www.junolightinggroup.com

Printed in U.S.A. ©2015 Juno Lighting, LLC.