



## Description

Non-IC rated, low voltage remodel housing for applications where the back side of the ceiling is not accessible • Designed to be installed in non-insulated areas, or where insulation is spaced at least 3" from housing

## Listings

UL Listed, C-UL/CSA certified for through-branch wiring, damp and wet locations • Wet location listed with trims 441, 4401, 4402 and 4481 • Conforms with City of Chicago IP requirements

## Features

- 4" Remodel housing
- Ceramic bi-pin socket with aluminum heat shield
- Remodel springs accommodate up to a 1 1/8" ceiling thickness
- Steel housing is fully assembled for ease of installation
- Includes 120V to 12V 50VA thermally protected magnetic transformer
- May be dimmed using dimmers specifically designed for magnetic transformers
- Pre-wired junction box with (3) 1/2" knockouts with pryout slots, (4) non-metallic sheathed cable connectors, and ground wire
- Shadow-free, knife-edge trim design blends smoothly into the ceiling and allows architectural continuity with Aculux® trims
- UL Listed, C-UL/CSA certified for through-branch wiring, maximum (4) #12 AWG minimum 90° C branch circuit conductors (2 in, 2 out)
- Thermally protected against improper use of lamps or insulation
- MR16 lamp wattage ratings based on trim selection on pages 28-30


## Ordering Information

Catalog Number: **TC44R**

## Accessories

Catalog Number	Description
<b>SMPLT-4</b>	Galvanized steel plate for locating remodel style housings in new construction. Screw/nail holes for full coverage between 16" and 24" joists.

## Dimensions

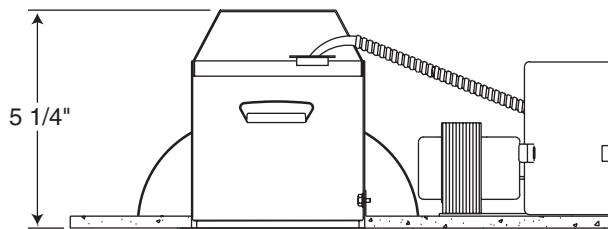

4 3/8" Ceiling Cutout

