



JOB NAME: \_\_\_\_\_

DATE: \_\_\_\_\_

TYPE: \_\_\_\_\_

### DESCRIPTION

Tallpack in 28 & 42 watt compact fluorescent with built-in mini sensor for motion activated operation. Vandal resistant polycarbonate housing. Sensor has 180° detection and controls up to 250 watts @ 120v. Minimum starting temperature -20° F for 28w, 0° F for 42w. Lamp supplied.

### SPECIFICATIONS

#### "No Hands" Auto Testing:

Auto mode starts after 4 minutes of testing.  
No adjustment needed.

#### Built for Severe Conditions:

Double weatherproofing for long life

#### LED Detection Indicator:

Glowes red day and night for "on-guard" deterrence.

#### Manual Override:

Double flip wall switch logic prevents activation by short power outages. Resets after 8 hours. No extra wiring needed.

#### Photocontrol:

Deactivates lights during daylight. Fully adjustable for 24 hour operation or custom applications. Please specify voltage.

#### Quick Test Time:

5 seconds test time for fast installation.  
Works day or night.

#### Sensor Case Construction:

Precision molded Lexan®

#### Surge Protection:

Withstands up to 3000 volts

#### Time Adjustment:

5 seconds to 15 minutes CFL lamps have longer life if Time Adjustment is set to < 7 minutes.

#### UL Listing:

Suitable for wet locations.

#### Vandal Resistant Lens:

Hard lens resists vandalism

#### Voltage:

120 volts AC 60 Hz.

#### Ballast Minimum Starting Temperature:

-22

#### Detection:

180° detection

#### Housing:

Vandal resistant polycarbonate housing

#### Patents:

RAB sensor and fixture designs are protected under U.S. and International Intellectual Property laws.

#### Refractor:

Prismatic polycarbonate refractor for wide light distribution

#### Switching Capacity:

Controls up to 250 watts Fluorescent @ 120 volts


#### Color:

White


#### Weight:

7.35

### DIMENSIONS

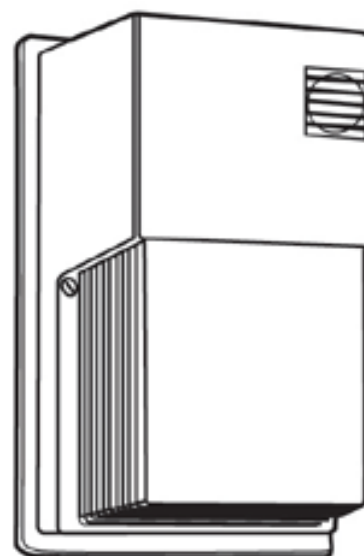

### DETECTION PATTERN

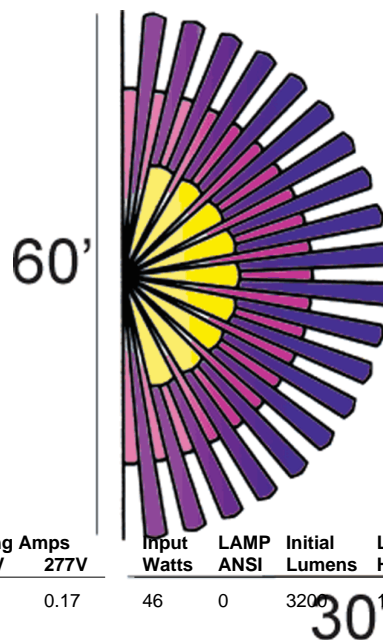

### ORDERING INFORMATION

**Compact Fluorescent**  
Lamp supplied with fixture

Total Watts	Lamp Type	Lamp Base	Ballast	Starting Amps/ Operating Amps				Input Watts	LAMP ANSI	Initial Lumens	Lamp Hours
				120V	208V	240V	277V				
42	42W Triple	GX24q-4	Electronic QT	0.38	0.3	0.2	0.17	46	0	3200	12000

**Factory Installed Options**  
Add suffix to Catalog Number

Note: Specifications may change without notice

**RAB Lighting, Inc.** • 170 Ludlow Ave • Northvale, NJ 07647 • Tel: 888 RAB-1000 • Fax: 888 RAB-1232 • [www.rabweb.com](http://www.rabweb.com)  
© 2009