



VXBRLED with Globe & Guard INSTRUCTIONS



Thank you for buying RAB lighting fixtures. Our goal is to design the best quality products to get the job done right. We'd like to hear your comments. Call the Marketing Department at 888-RAB-1000, or email: marketing@rabweb.com

IMPORTANT

READ CAREFULLY BEFORE INSTALLING FIXTURE. RETAIN THESE INSTRUCTIONS FOR FUTURE REFERENCE.


RAB fixtures must be wired in accordance with the National Electrical Code and all applicable local codes. Proper grounding is required for safety. THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED.

WARNING: Make certain power is OFF before installing or maintaining fixture. No user serviceable parts inside.

WALL MOUNT

Fixture must be wall mounted. Use recessed or surface mount junction box (not supplied) or use the **Housing** as the junction box. **Fixture cannot be mounted upside down in wet locations!**

1. Loosen **Housing Screws** and open **Housing**.
2. Prepare back of **Housing** to use by knocking out necessary mounting holes.
3. Seal all gaps between wall and fixture with weatherproof silicone sealant.
4. Fixture may be wired through back conduit entrance or side conduit entrance for surface mounting.
5. Connect wires as shown in wiring section.
6. Close **Housing**. Tighten screws and check **Housing Gasket** seal.
7. Seal all holes, plugs and conduit entrances with weatherproof silicone sealant.

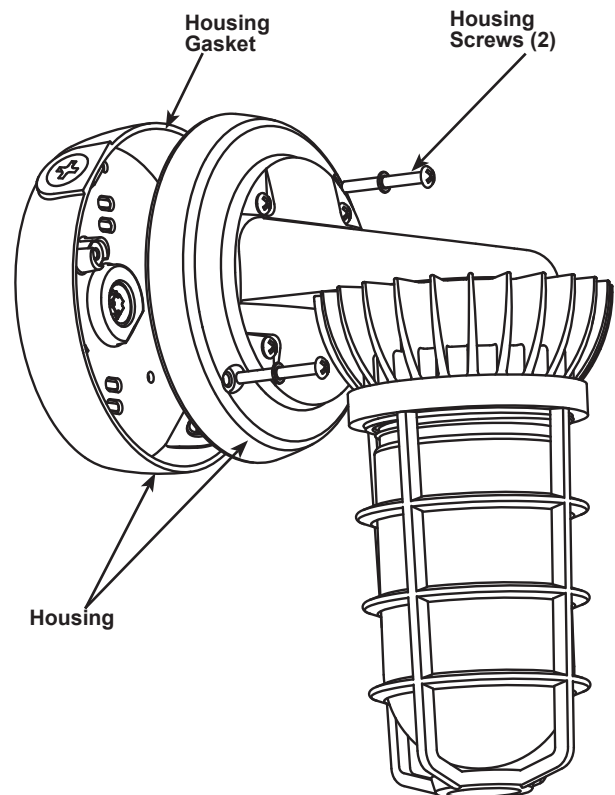


VXBRLED with Globe & Guard INSTRUCTIONS

WIRING

Universal voltage driver permits operation at 120V thru 277V, 50 or 60 Hz.

1. Connect the black fixture lead to the (+) LINE supply lead.
2. Connect the white fixture lead to the (-) COMMON supply lead.
3. Connect the GROUND wire from fixture to supply ground.

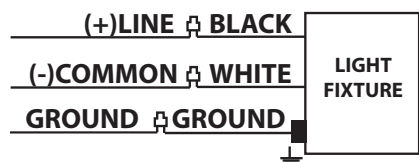

TROUBLESHOOTING

1. Check that the line voltage at fixture is correct.
2. Is there voltage at the lamp fixture wires? If there is no voltage, check all connections.
3. Is the fixture is grounded properly?

CLEANING & MAINTENANCE

CAUTION: Be sure fixture temperature is cool enough to touch. Do not clean or maintain while fixture is energized.

1. Clean glass lens & fixture with non-abrasive glass cleaning solution.
2. Do not open fixture to clean the LED. Do not touch the LED.

US: pat. pending; D651738; CN: ZL201230040341.3;
ZL201130028360.X; TW: pat. 101301367; MX: 35699; Pat. pending;
CA: © RAB Lighting Inc;

Note: These instructions do not cover all details or variations in equipment nor do they provide for every possible situation during installation, operation or maintenance.

Easy Installation & Product Help

Tech Help Line

Call our experts
888 RAB-1000

Toll Free Fax

Send a fax to RAB
888 RAB-1232

rabweb.com

Visit our website
for product info

e-mail

Answered promptly
sales@rabweb.com



VXBRLED with Globe & Guard INSTRUCTIONS


VXBRLED13DG Cool

RAB



Light Output (Lumens)	729
Watts	15
Lumens per Watt (Efficacy)	48

Color Accuracy	65
Color Rendering Index (CRI)	

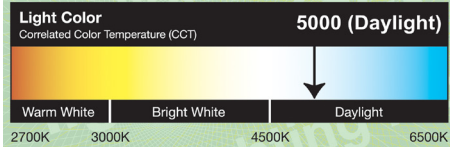

All results are according to IESNA LM-79-2008: *Approved Method for the Electrical and Photometric Testing of Solid-State Lighting*. The U.S. Department of Energy (DOE) verifies product test data and results.

Visit www.lightingfacts.com for the *Label Reference Guide*.

Registration Number: WVMA-C4LN78

Model Number: VXBRLED13DG

Type: Outdoor decorative fixture


VXBRLED13DG Neutral

RAB



Light Output (Lumens)	595
Watts	15.2
Lumens per Watt (Efficacy)	39

Color Accuracy	88
Color Rendering Index (CRI)	

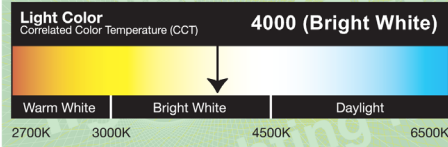

All results are according to IESNA LM-79-2008: *Approved Method for the Electrical and Photometric Testing of Solid-State Lighting*. The U.S. Department of Energy (DOE) verifies product test data and results.

Visit www.lightingfacts.com for the *Label Reference Guide*.

Registration Number: WVMA-6QSCSE (6/9/2012)

Model Number: VXBRLED13NDG

Type: Outdoor decorative fixture


VXBRLED13DG Warm

RAB



Light Output (Lumens)	507
Watts	15
Lumens per Watt (Efficacy)	33

Color Accuracy	86
Color Rendering Index (CRI)	

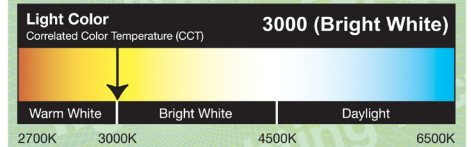

All results are according to IESNA LM-79-2008: *Approved Method for the Electrical and Photometric Testing of Solid-State Lighting*. The U.S. Department of Energy (DOE) verifies product test data and results.

Visit www.lightingfacts.com for the *Label Reference Guide*.

Registration Number: WVMA-VY78JE

Model Number: VXBRLED13YDG

Type: Outdoor decorative fixture


VXBRLED26DG Cool

RAB



Light Output (Lumens)	1955
Watts	30
Lumens per Watt (Efficacy)	66

Color Accuracy	68
Color Rendering Index (CRI)	

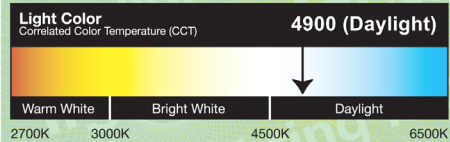

All results are according to IESNA LM-79-2008: *Approved Method for the Electrical and Photometric Testing of Solid-State Lighting*. The U.S. Department of Energy (DOE) verifies product test data and results.

Visit www.lightingfacts.com for the *Label Reference Guide*.

Registration Number: WVMA-YB48YQ (5/3/2012)

Model Number: VXBRLED26DG

Type: Outdoor decorative fixture


VXBRLED26DG Neutral

RAB



Light Output (Lumens)	1473
Watts	29
Lumens per Watt (Efficacy)	50

Color Accuracy	86
Color Rendering Index (CRI)	

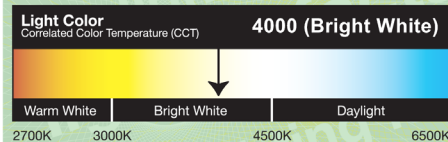

All results are according to IESNA LM-79-2008: *Approved Method for the Electrical and Photometric Testing of Solid-State Lighting*. The U.S. Department of Energy (DOE) verifies product test data and results.

Visit www.lightingfacts.com for the *Label Reference Guide*.

Registration Number: WVMA-M7K76Q (5/3/2012)

Model Number: VXBRLED26NDG

Type: Outdoor decorative fixture


VXBRLED26DG Warm

RAB



Light Output (Lumens)	1415
Watts	29
Lumens per Watt (Efficacy)	49

Color Accuracy	83
Color Rendering Index (CRI)	

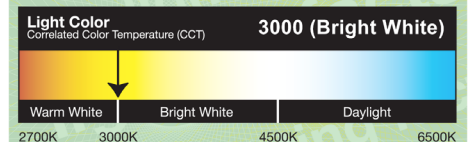

All results are according to IESNA LM-79-2008: *Approved Method for the Electrical and Photometric Testing of Solid-State Lighting*. The U.S. Department of Energy (DOE) verifies product test data and results.

Visit www.lightingfacts.com for the *Label Reference Guide*.

Registration Number: WVMA-R2XF6L (5/3/2012)

Model Number: VXBRLED26YDG

Type: Outdoor decorative fixture