

## SAVE THESE INSTRUCTIONS

**WARNING!** LUMINAIRES require high current and voltage.

**WARNING!** Fixtures must be grounded and installed in accordance with the National Electrical Code and all local codes. Failure to do so may increase the **RISK OF PERSONAL INJURY, PROPERTY DAMAGE, FIRE AND DEATH**. Install and use so product does not cause a hazard and use only in environments for which the product is specifically marked.

**WARNING!** This product contains chemicals known to the State of California to cause cancer, birth defects, and/or other reproductive harm. Thoroughly wash hands after installing, handling, cleaning, or otherwise touching this product.

**CAUTION!** Follow ALL luminaire manufacturer's recommendations, product markings, instructions, restrictions and warnings regarding luminaire operation, burning position, cycling and lamp replacement. Luminaire label shows electrical and environmental requirements.

All electrical work must be done by a qualified electrician.

Turn off electric power to all affected circuits and allow to cool before servicing.

A regularly scheduled maintenance program should be established to retain optimum light output and reduce heat retention. Dusting with a soft, clean, dry cloth is normally sufficient for the optical assembly. Any accumulation of dust or dirt should be removed regularly.

Carefully read these instructions before installing product. If you do not understand these instructions, before starting any work, contact your Hubbell Lighting distributor or techsupport@hubbell-ltg.com or (864) 678-1000

Give instructions to facility owner/manager for future reference.

**NOTE: DO NOT OPEN THIS PRODUCT UNLESS INSTRUCTED BY STEPS INCLUDED IN THESE INSTRUCTIONS OR BY HUBBELL LIGHTING TECHNICAL SUPPORT PERSONNEL. FIXTURE HAS BEEN DESIGNED WITH EASY TO INSTALL MOUNTING BRACKETS.**

**TOOLS REQUIRED: FLAT BLADE SCREWDRIVER OR 5/16" NUT DRIVER, DRILL, ANY ADDITIONAL TOOLS NEEDED FOR APPROPRIATE WALL FASTENERS**

**PARTS REQUIRED: (SUPPLIED BY OTHERS) SILICONE CAULK, 1/4" WALL ANCHORS AND FASTENERS APPROPRIATE FOR WALL CONSTRUCTION TYPE**


### STEP I - MOUNTING PREPARATION (Figure 1)

#### CAUTION:

**TRP FIXTURE WEIGHS ABOUT 11 LBS**

**RDI FIXTURE WEIGHS ABOUT 12 LBS**

- Remove fixture mounting bracket from fixture by loosening the two hex screws.
- Align holes in bracket to matching j-box holes.
- Secure mounting bracket to j-box.
- If not j-box available, mounting plate must be anchored to wall (hardware by others).
- Pull the supply wires (C) from junction box (B).
- Apply caulking sealant (supplied by others) around the top and two sides of the bracket where it meets the wall.

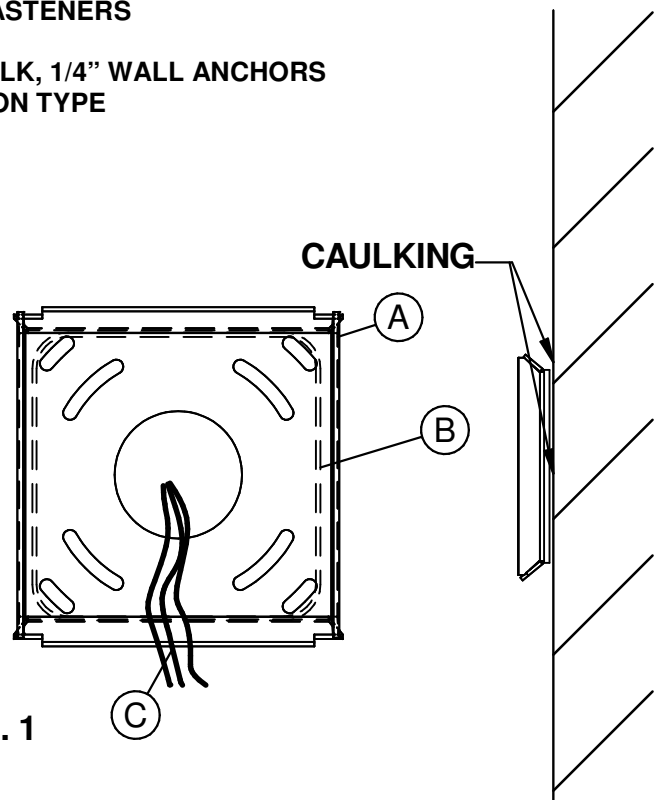

**FIG. 1**

## SAVE THESE INSTRUCTIONS

**NOTE: DO NOT OPEN THIS PRODUCT UNLESS INSTRUCTED BY STEPS INCLUDED IN THESE INSTRUCTIONS OR BY HUBBELL LIGHTING TECHNICAL SUPPORT PERSONNEL. FIXTURE HAS BEEN DESIGNED WITH EASY TO INSTALL MOUNTING BRACKETS.**

### Step II WIRING (See Fig. 2)

**POWER MUST BE OFF.**


**(WIRING MUST BE PERFORMED BY A QUALIFIED ELECTRICIAN)**

**CAUTION! SHOCK HAZARD, DO NOT CONNECT RED AND WHITE WIRES TOGETHER UNTIL ALL OTHER CONNECTIONS HAVE BEEN MADE.**

- Wire service leads to fixture power leads according to local and National Electric Codes.
- Luminaire is equipped with a universal voltage driver capable of 120V-277V input.
- For direct wire connections, connect ground wire to green wire. Connect black to black and white to neutral then push connections back inside J-box.

**NOTE: If an Emergency Battery Pack is used with the fixture, refer to the battery pack instruction sheet for correct wiring instructions of the battery unit.**


**FIG. 2**

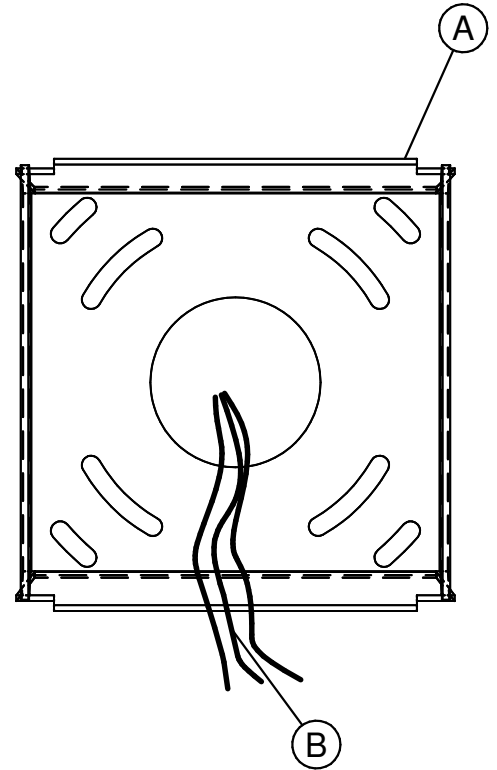

### STEP III FIXTURE MOUNTING (See Fig. 3)

- Hold fixture at a slight angle, slide over mounting plate and rotate upward to capture plate.
- Tighten screw (G) securely.
- Check to ensure secure mount.
- Energize product.

**WARNING:  
NOT DESIGNED FOR UPLIGHT  
FIXTURE TO BE INSTALLED FACE  
DOWN ONLY**

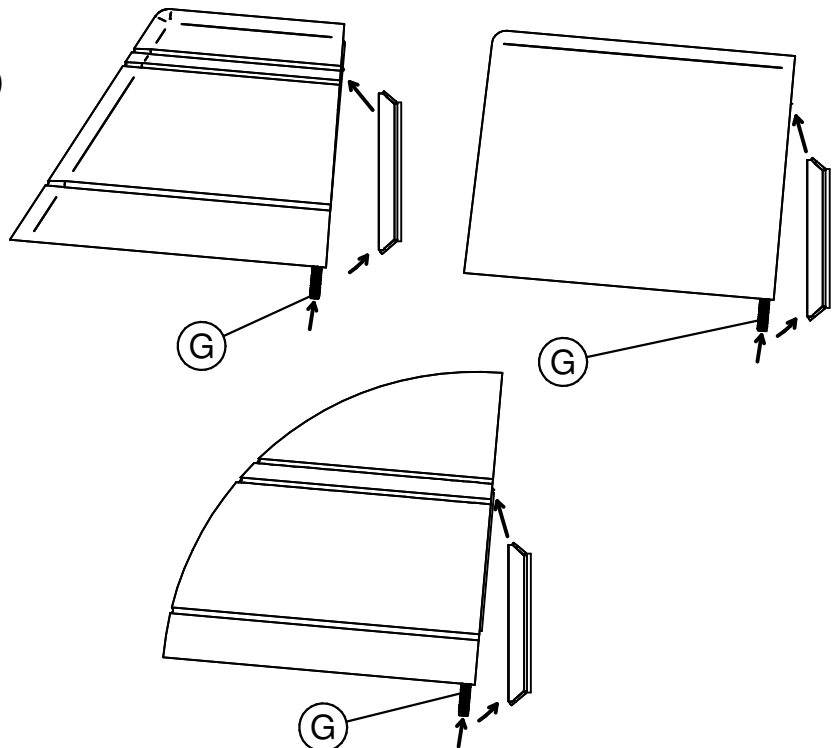

**FIG. 3**