

# IC22R 6" Incandescent Remodel Housing

IC Rated

**Juno**

**Air-Loc**

## Features

- 6" Remodel housing
- Adjustable socket plate and detachable socket with snap-in springs to accommodate various lamp and trim combinations
- Socket plate is secured at two points for consistent, straight lamp positioning
- Medium base porcelain socket with nickel-plated copper screw shell
- Shipped with socket cap to protect against paint overspray
- Adjustable height remodel springs accommodate up to a 1 3/4" ceiling thickness
- Housing is fully assembled for ease of installation
- Pre-wired junction box with (5) 1/2" knockouts with pryout slots, (4) non-metallic sheathed cable connectors, and ground wire
- UL Listed, C-UL/CSA certified for through-branch wiring, maximum (4) #12 AWG branch circuit conductors (2 in, 2 out)
- Thermally protected against improper use of lamps
- Shadow-free, knife-edge trim design blends smoothly into the ceiling and allows architectural continuity with Aculux® trims
- Lamp wattage ratings and apertures based on trim selection on pages 98-100



## Description

IC rated, energy efficient Air-Loc® sealed remodel housing • Can be completely covered with insulation • Air-Loc installation stops infiltration and exfiltration of air, reducing heating and cooling costs

## Listings

UL Listed, C-UL/CSA certified for through-branch wiring, damp and wet locations • Wet location listed with the 239, 241 and 242 trims • The listing also includes the 28 and 29 trims, only when used with PAR30/PAR38 outdoor rated lamps • Washington State IECC and MEC energy codes as tested per ASTM-E283 • Conforms with City of Chicago IP requirements



## Ordering Information

Catalog Number: **IC22R**

## Accessories

Catalog Number	Description
<b>ALG6R</b>	Air-Loc® Energy Conserving Gasket Kit for 6" Air-Loc® IC Remodel housings

## Dimensions

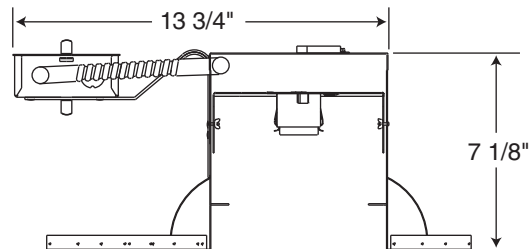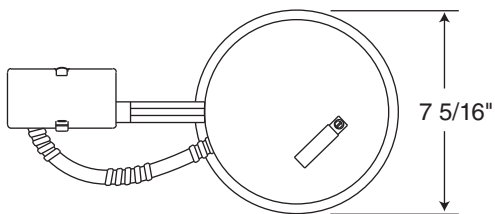

6 3/4" Ceiling Cutout

Down-Lites