



Description

IC rated, energy efficient Air-Loc® sealed housing

- Can be completely covered with insulation
- Air-Loc installation stops infiltration and exfiltration of air, reducing heating and cooling costs

Listings

UL Listed, C-UL/CSA certified for through-branch wiring, damp and wet locations

- Wet location listed with the 239, 241 and 242 trims
- The listing also includes the 28 and 29 trims, only when used with PAR30/PAR38 outdoor rated lamps
- Washington State IECC and MEC energy codes as tested per ASTM-E283
- Conforms with City of Chicago IP requirements

Features

- 6" Housing
- Adjustable socket plate and detachable socket with snap-in springs to accommodate various lamp and trim combinations
- Socket plate is secured at two points for consistent, straight lamp positioning
- Medium base porcelain socket with nickel-plated copper screw shell
- Shipped with socket cap to protect against paint overspray
- Housing is vertically adjustable to accommodate up to a 1" ceiling thickness
- Real Nail® 3 bar hangers: telescoping system with pre-installed removable nail for easy repositioning of housing in joist construction
- Integral T-bar mounting feature for secure installation in suspended ceilings
- Patented breakaway bars for tight joist spacing
- Bar hangers may be re-positioned 90°
- Curved foot facilitates alignment with joist bottom
- Quick-Loc slot and oversized set screw lock fixture in position
- Housing is fully assembled for ease of installation
- Pre-wired junction box with (5) 1/2" and (1) 3/4" knockouts with pryout slots, (4) non-metallic sheathed cable connectors, and ground wire
- Shadow-free, knife-edge trim design blends smoothly into the ceiling and allows architectural continuity with Aculux® trims
- UL Listed, C-UL/CSA certified for through-branch wiring, maximum (8) #12 AWG branch circuit conductors (4 in, 4 out)
- Thermally protected against improper use of lamps
- Lamp wattage ratings and apertures based on trim selection on pages 98-100

Ordering Information

Catalog Number: **IC22**


Catalog Number: **IC22W** - IC22 with push-in electrical connectors for fast, secure installation

Catalog Number: **IC22S** - IC22 with smaller footprint bar hanger (Real Nail® 2)


Accessories

Catalog Number	Description
ALG6	Air-Loc® Energy Conserving Gasket for 6" Air-Loc® IC housings

Dimensions

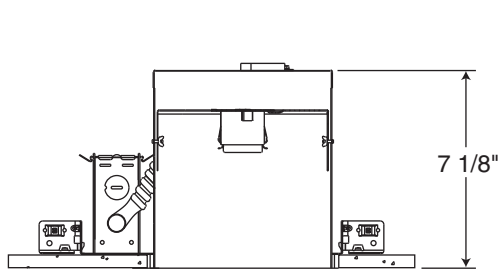

6 7/8" Ceiling Cutout

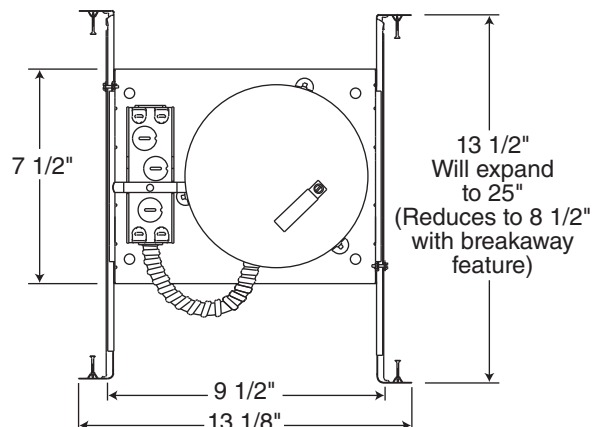

Adjustables (cont)




AVIO™ Square Gimbal Ring

Catalog #
XR30101BL
XR30101GP
XR30101SL
XR30101WH

Description
Black Trim
Graphite Trim
Silver Trim
White Trim

Max. Lamp Rating
75W PAR30



Lensed




Frosted Lens with Reflector

Catalog #
239-WH

Description
Frosted Lens, White Trim

Max. Lamp Rating
40W A19, 35W PAR30L




Drop Opal with Reflector

Catalog #
241-PW
241-WH

Description
Shower/Closet Light,
Plastic White
White Trim

Max. Lamp Rating
40W A19




Frosted Lens with Clear Center

Catalog #
242-ABZ
242-SC
242-WH

Description
Classic Aged Bronze Trim
Satin Chrome Trim
White Trim

Max. Lamp Rating
45W PAR38



Decorative




Octagonal

Catalog #
9024W-WH

Description
White Octagonal with White
Baffle, White Trim

Max. Lamp Rating
50W PAR30/65W BR30
Aperture
5 3/4"




Luminous Disc (Frosted)

Catalog #
9324-SC

Description
Satin Chrome Trim

Max. Lamp Rating
50W PAR30/65W BR30
Aperture
3 1/4"




Metal Band

Catalog #
9524-SC

Description
Satin Chrome Band, Satin
Chrome Trim

Max. Lamp Rating
50W PAR30/75W
PAR30L/65W BR30
Aperture
5 7/8"




Luminous Collar (Frosted)


Catalog #
9702

Description
Clear Etched Collar

Max. Lamp Rating
50W PAR30/75W
PAR30L/65W BR30
Aperture
6 3/8"



BR/PAR Downlights (cont)



Catalog #
252-WH


Description
White Trim

Max. Lamp Rating
65W BR30
Aperture
4"



BR30 Regressed Open Frame

A-Lamp Downlights



Catalog #
231C-WH
231G-WH
231W-WH


Description
Clear Alzak®, White Trim
Gold Alzak®, White Trim
Gloss White, White Trim

Max. Lamp Rating
60W A19
Aperture
5 7/8"



A-Lamp Reflector

Adjustables




Catalog #
226W-WH
226B-WH

Description
White Cylinder Adjustable with White Baffle, White Trim
Black Cylinder Adjustable with Black Baffle, White Trim

Max. Lamp Rating
60W PAR16



Cylinder Spotlight in Baffle




Catalog #
228-WH

Description
White Trim

Max. Lamp Rating
50W PAR20/R20



R/PAR20 Regressed Eyeball




Catalog #
248W-WH

Description
White Baffle, White Trim

Max. Lamp Rating
50W PAR20/R20



R/PAR20 Regressed Eyeball in Baffle




Catalog #
229-ABZ
229-BL
229-SC
229-WH

Description
Classic Aged Bronze Trim
Black Trim
Satin Chrome Trim
White Trim

Max. Lamp Rating
75W PAR30L, 65W BR30



PAR/BR30 Regressed Eyeball




Catalog #
249W-WH
249B-WH

Description
White Baffle, White Trim
Black Baffle, White Trim

Max. Lamp Rating
75W PAR30L, 65W BR30



PAR/BR30 Regressed Eyeball in Baffle




Catalog #
264W-WH
264B-WH

Description
White Baffle, White Trim
Black Baffle, White Trim

Max. Lamp Rating
50W PAR30
Aperture
5 3/4"



PAR30 Adjustable Tapered Baffle



Catalog #
267B-WH
267C-WH
267G-WH
267HZ-WH
267WHZ-WH

Description
Black Alzak®, White Trim
Clear Alzak®, White Trim
Gold Alzak®, White Trim
Haze, White Trim
Wheat Haze, White Trim

Max. Lamp Rating
50W PAR30
Aperture
4"



















PAR30 Adjustable Tapered Cone

*Compatible with TR6, 6" trim ring

www.junolightinggroup.com

BR/PAR Downlights

	<p>Catalog # 24W-WH 24B-WH 24B-BL 24B-ABZ 24B-SC</p>	<p>Description White Baffle, White Trim Black Baffle, White Trim Black Baffle, Black Trim Black Baffle, Classic Aged Bronze Trim Black Baffle, Satin Chrome Trim</p>	<p>Max. Lamp Rating 75W PAR30L, 50W PAR30, 65W BR30 Aperture 5 3/4"</p>	
<p>Tapered Baffle</p>				
	<p>Catalog # 25W-WH 25B-WH 25B-BL 25B-ABZ 25B-SC</p>	<p>Description White Baffle, White Trim Black Baffle, White Trim Black Baffle, Black Trim Black Baffle, Classic Aged Bronze Trim Black Baffle, Satin Chrome Trim</p>	<p>Max. Lamp Rating 50W PAR30, 65W BR30, 65W PAR38 Aperture 5 3/4"</p>	
<p>Straight Baffle</p>				
	<p>Catalog # 28W-WH 28B-WH</p>	<p>Description White Baffle, White Trim Black Baffle, White Trim</p>	<p>Max. Lamp Rating 60W A19, 75W PAR30/30L 65W BR30, 90W PAR38/BR40 Aperture 5 7/8"</p>	
<p>Ultra-Trim Baffle-Fully Enclosed</p>				
	<p>Catalog # 244W-WH 244B-WH</p>	<p>Description White Baffle, White Trim Black Baffle, White Trim</p>	<p>Max. Lamp Rating 60W PAR30, 65W BR30, 75W PAR30L Aperture 5 3/4"</p>	
<p>Shallow Baffle</p>				
	<p>Catalog # 27B-WH 27C-WH 27G-WH 27HZ-WH 27PT-SC 27W-WH 27WHZ-ABZ 27WHZ-WH</p>	<p>Description Black Alzak®, White Trim Clear Alzak®, White Trim Gold Alzak®, White Trim Haze, White Trim Pewter Alzak®, Satin Gloss White, White Trim Wheat Haze, Classic Aged Bronze Trim Wheat Haze, White Trim</p>	<p>Max. Lamp Rating 50W PAR30, 65W BR30, 75W PAR30L Aperture 5 3/4"</p>	
<p>Tapered Cone</p>				
	<p>Catalog # 29C-WH 29W-WH</p>	<p>Description Clear Finish, White Trim White Finish, White Trim</p>	<p>Max. Lamp Rating 60W A19, 75W PAR30/30L 65W BR30, 90W PAR38/BR40 Aperture 5 7/8"</p>	
<p>Ultra-Trim Cone-Fully Enclosed</p>				
	<p>Catalog # 247B-WH 247C-WH 247G-WH 247HZ-WH 247WHZ-WH</p>	<p>Description Black Alzak®, White Trim Clear Alzak®, White Trim Gold Alzak®, White Trim Haze, White Trim Wheat Haze, White Trim</p>	<p>Max. Lamp Rating 75W PAR30L, 65W BR30, 75W PAR30 Aperture 5 3/4"</p>	
<p>Shallow Cone</p>				
	<p>Catalog # 250-ABZ 250-SC 250-WH</p>	<p>Description Classic Aged Bronze Trim Satin Chrome Trim White Trim</p>	<p>Max. Lamp Rating 65W BR30 Aperture 4"</p>	
<p>BR30 Open Frame</p>				

IMPORTANT: Wet location listed only with outdoor rated PAR30/38 lamps

*Compatible with TR6, 6" trim ring

IMPORTANT: Wet location listed only with outdoor rated PAR30/38 lamps

*Compatible with TR6, 6" trim ring

