IC23 Series 6" Incandescent Housing with Floating Socket IC Rated

Features


- 6" Housing
- Floating socket with spring for quick trim attachment and consistent alignment
- Medium base porcelain socket with nickel-plated copper screw shell
- Shipped with socket cap to protect against paint overspray
- Housing is vertically adjustable to accommodate up to a 1" ceiling thickness
- Real Nail[®] 3 bar hangers: telescoping system with pre-installed removable nail for easy repositioning of housing in joist construction • Integral T-bar mounting feature for secure installation in suspended ceilings • Patented breakaway bars for tight joist spacing • Bar hangers may be re-positioned 90° • Curved foot facilitates alignment with joist bottom • Quick-Loc slot and oversized set screw lock fixture in position
- Housing is fully assembled for ease of installation
- Pre-wired junction box with (5) 1/2" and (1) 3/4" knockouts with pryout slots, (4) non-metallic sheathed cable connectors, and ground wire
- Shadow-free, knife-edge trim design blends smoothly into the ceiling and allows architectural continuity with Aculux® trims
- UL Listed, C-UL/CSA certified for through-branch wiring, maximum (8) #12 AWG branch circuit conductors (4 in, 4 out)
- Thermally protected against improper use of lamps
- Lamp wattage ratings and apertures based on trim selection on pages 102-104

Ordering Information

Catalog Number: IC23

Catalog Number: IC23W - IC23 with push-in electrical connectors for fast, secure installation

Dimensions





AIR-LOC

Description


IC rated, energy efficient Air-Loc® sealed housing • Can be completely covered with insulation • Air-Loc installation stops infiltration and exfiltration of air, reducing heating and cooling costs

Listings

UL Listed, C-UL/CSA certified for through-branch wiring, damp and wet location • Wet location listed with the 239, 241 trim • The listing also includes the 28 and 29 trims, only when used with PAR30/PAR38 outdoor rated lamps • Washington State IECC and MEC energy codes as tested per ASTM-E283 • Conforms with City of Chicago IP requirements

Accessories

Catalog Number	Description
ALG6	Air-Loc [®] Energy Conserving
	Gasket for 6" Air-Loc [®] IC
	housings




6 7/8" Ceiling Cutout



JUNO

BR/PAR Adjustables (cont)

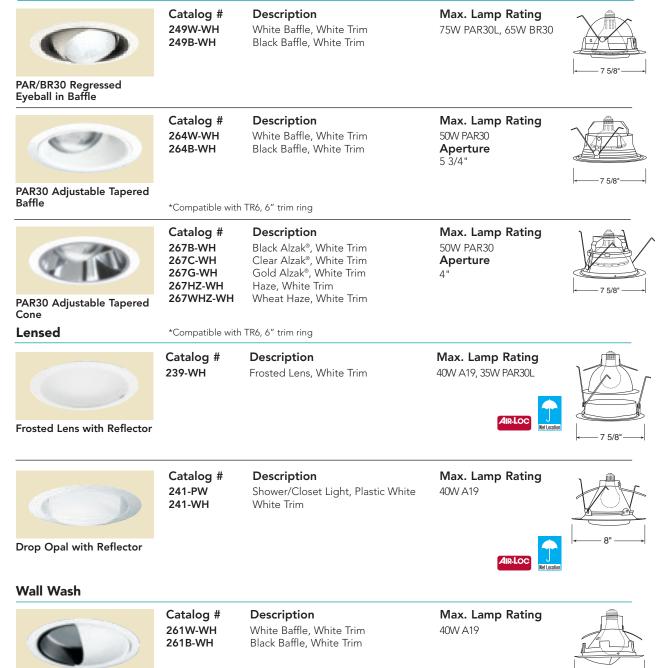

7 5/8

Down-Lites



Scoop

JUNO

A-Lamp Downlights (cont)

Catalog #

233C-WH

Catalog #

232C-WH

232G-WH

232HZ-WH

232W-WH

232WHZ-WH

Catalog #

Catalog # 229-ABZ

229-BL

229-SC

229-WH

228-WH



7 5/8"

Description Clear Alzak[®] with Black Baffle, White Trim

Max. Lamp Rating 40W A19 Aperture 5 7/8"

Max. Lamp Rating

60W A19

5 7/8"

Aperture



A-Lamp Reflector with Baffle



A-Lamp Reflector

BR/PAR Adjustables

~ /	Catalog #	Description	Max. Lamp Rating	
A	226W-WH	White Cylinder Adjustable with White Baffle, White Trim	60W PAR16	1
← 7 5/8" →	226B-WH	Black Cylinder Adjustable with Black Baffle, White Trim		
				Cylinder Spotl



Description

Description

Haze, White Trim

Clear Alzak[®], White Trim

Gold Alzak[®], White Trim

Gloss White, White Trim


Wheat Haze, White Trim

White Trim

Max. Lamp Rating 50W PAR20/R20



R/PAR20 Regressed Eyeball



Description White Baffle, White Trim

Description

Black Trim

White Trim

Classic Aged Bronze Trim

Satin Chrome Trim

Max. Lamp Rating 50W PAR20/R20

Max. Lamp Rating

75W PAR30L, 65W BR30



R/PAR20 Regressed Eyeball in Baffle



PAR/BR30 Regressed Eyeball



JUNO°

BR/PAR Downlights

	Catalog # 28W-WH 28B-WH	Description White Baffle, White Trim Black Baffle, White Trim	Max. Lamp Rating 60W A19, 75W PAR30/30L 65W BR30, 90W PAR38/BR40 Aperture 5 7/8"			
Ultra-Trim Baffle-Fully Enclosed	IMPORTANT: Wet loo	ration listed only with outdoor rated PAR30/38 lamps		i← 7 5/8" ──		
	Catalog # 244W-WH 244B-WH	Description White Baffle, White Trim Black Baffle, White Trim	Max. Lamp Rating 65W BR30, 60W PAR30 75W PAR30L Aperture 5 3/4"	7 5/8"		
Shallow Baffle	*Compatible with	*Compatible with TR6, 6" trim ring				
Ultra-Trim Cone-Fully	Catalog # 29C-WH 29W-WH	Description Clear Finish, White Trim White Finish, White Trim	Max. Lamp Rating 60W A19, 75W PAR30/30L 65W BR30, 90W PAR38/BR40 Aperture 5 7/8"	7 5/8"		
Enclosed	IMPORTANT: Wet loo	IMPORTANT: Wet location listed only with outdoor rated PAR30/38 lamps				
Shallow Cone	Catalog # 247B-WH 247C-WH 247G-WH 247HZ-WH 247HZ-WH	Description Black Alzak [®] , White Trim Clear Alzak [®] , White Trim Gold Alzak [®] , White Trim Haze, White Trim Wheat Haze, White Trim	Max. Lamp Rating 75W PAR30, 75W PAR30L, 65W BR30 Aperture 5 3/4"	7 5/8"		
	*Compatible with TR6, 6" trim ring					
\bigcirc	Catalog # 250-ABZ 250-SC 250-WH	Description Classic Aged Bronze Trim Satin Chrome Trim White Trim	Max. Lamp Rating 65W BR30 Aperture 4"	7 5/8"		
BR30 Open Frame						
A-Lamp Downlights						
	Catalog #	Description	Max. Lamp Rating	A		



Economy A-Lamp Reflector with Baffle

Catalog #Description230CW-WHWhite Baffle, White Trim230CB-WHBlack Baffle, White Trim

Max. Lamp Rating 40W A19 Aperture 5 1/2"



