

TC2R 6" Incandescent Remodel Housing

Non-IC Rated



Features

- 6" Remodel housing
- Medium base porcelain socket with nickel-plated copper screw shell
- Drop socket with spring to accommodate various trim installations
- Adjustable height remodel springs accommodate up to a 1 3/4" ceiling thickness
- Telescoping housing adjusts from 7 1/4" max. height down to 5 1/4" min. height
- Housing is fully assembled for ease of installation
- Pre-wired junction box with (5) 1/2" knockouts with pryout slots, (4) non-metallic sheathed cable connectors, and ground wire
- Shadow-free, knife-edge trim design blends smoothly into the ceiling and allows architectural continuity with Aculux® trims
- UL Listed, C-UL/CSA certified for through-branch wiring, maximum (4) #12 AWG 90° C branch circuit conductors (2 in, 2 out)
- Thermally protected against improper use of lamps or insulation
- Lamp wattage ratings and apertures based on trim selection on pages 90-95



Description

Non-IC rated remodel housing for applications where the back side of the ceiling is not accessible

- Designed to be installed in non-insulated areas, or where insulation is spaced at least 3" from housing
- Adjustable height allows installation where vertical space is limited

Listings


UL Listed, C-UL/CSA certified for through-branch wiring, damp and wet locations • Wet location listed with the 20, 21, 22, 239, 240, 241, 242, 243, and 9900 trims • The listing also includes the 28 and 29 trims, only when used with PAR30/PAR38 outdoor rated lamps

- Conforms with City of Chicago IP requirements


Ordering Information

Catalog Number: **TC2R**

Dimensions

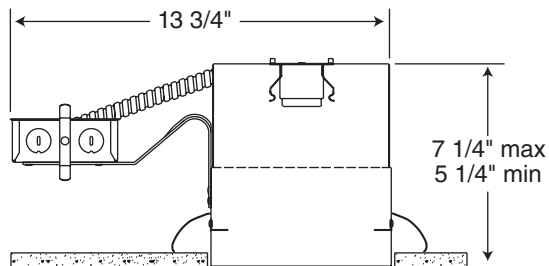

6 3/4" Ceiling Cutout

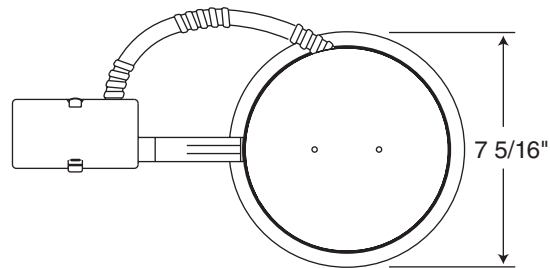

Down-Lites