



Project: \_\_\_\_\_

Fixture Type: \_\_\_\_\_

Location: \_\_\_\_\_

Contact/Phone: \_\_\_\_\_

# 6" IC REMODEL HOUSING

## COMPATIBLE WITH V6RL3K-WH-T24

### IC23R-LEDT24



#### PRODUCT DESCRIPTION

IC Air-Loc® Remodel Housing for use with VuLite V6RL3K-WH-T24

- Energy efficient, sealed housing • IC Remodel Housing for remodel application where back side of ceiling is not accessible
- Installs through an opening in the ceiling from below • Secured in place by factory installed remodel springs • Can be completely covered with insulation • Fully sealed housing stops exfiltration of air, reducing heating and air cooling costs without the use of additional gaskets.

#### PRODUCT SPECIFICATIONS

**Electrical Connections** Features non-screw base 120V plug-in connector • Compatible with VuLite V6RL3K-WH-T24 • Meets high efficacy requirements of California T24-2008.

**Labels** U.L. listed for U.S. and Canada for through-branch wiring and damp locations • Certified to high efficacy requirements of California T24-2008.

**Testing** All reports are based on published industry procedures; field performance may differ from laboratory performance.

Product specifications subject to change without notice.



#### INSTALLATION

**Junction Box** Pre-wired junction box, UL and cUL listed for through-branch wiring maximum 4 No. 12 AWG 90° C branch circuit conductors (2 in, 2 out) • Junction box provided with removable access plate, (5) 1/2" knockouts, (4) Non-metallic sheathed cable connectors and ground wire • Knockouts equipped with pryout slots • Push-in electrical connectors supplied as standard for fast, secure installation.

**Housing** IC aluminum housing, sealed for Air-Loc Compliance

- Double stack adjustable feature enables remodel spring to accommodate up to 1 3/4" ceiling thickness.

#### DIMENSIONS

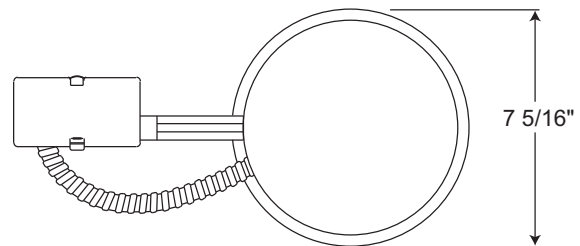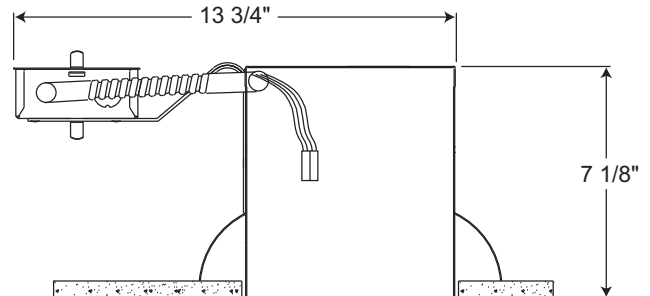

6 3/4" CEILING CUTOUT

#### PRODUCT CODES

Catalog Number	Input Voltage
IC23R-LEDT24	120V

#### COMPATIBLE LED MODULE

Catalog No.	Description
V6RL3K-WH-T24	6" LED Module, 3000K

To order, specify catalog number.