Switches



- Paddle turns on/off
- · Use with any 15A load
- General purpose switching of all light sources and motor loads
- Available with locator light

Fan controls



- Paddle turns on/off
- · Slide up to increase speed, down to decrease speed
- · 3 quiet fan speeds for increased comfort
- · For use with only one ceiling paddle fan
- · Does not include locator light
- · Designed to prevent motor hum

Switches

General purpose switches

Single-pole	CA-1PS- XX 1
120/277V 15A	SC-1PS- <u>XX</u> ²
3-way	CA-3PS- XX 1
120/277V 15A	SC-3PS- <u>XX</u> ²
4-way	CA-4PS- XX 1
120/277V 15A	SC-4PS- XX ²

General purpose switches with locator light

CA-1PSNL- XX 3
SC-1PSNL-XX⁴
CA-3PSNL- XX 3
SC-3PSNL- XX ⁴
CA-4PSNL- XX 3
SC-4PSNL-XX4

No derating required if ganged.

XX¹: Gloss color codes, see pg. 82 XX²: Satin Colors® codes, see pg. 82

XX³: Only available in Almond (AL), Ivory (IV), Light Almond (LA) and White (WH)

XX4: Available in Biscuit (BI), Eggshell (ES), Goldstone (GS), Limestone (LS), Sea Glass (SG) and Snow (SW), see pg. 82 (Wallplates not included. Order separately, see pg. 169)

¥ Fan controls

Fan controls—quiet 3-speed

3-way/single-pole	DVFSQ-F-XX1
120V 1.5A	DVSCFSQ-F-XX2
3-way/single-pole	DVFSQ-F-HO-XX1
120V 2.0A	

DVFSQ-F-HO model for use with specific fans such as Hunter Original Series.

Does not include built-in locator light.


No derating required if ganged.

All models must be derated if ganged unless otherwise noted, see pg. 179.

*Requires neutral wire connection.


Connections overview

Load connections*

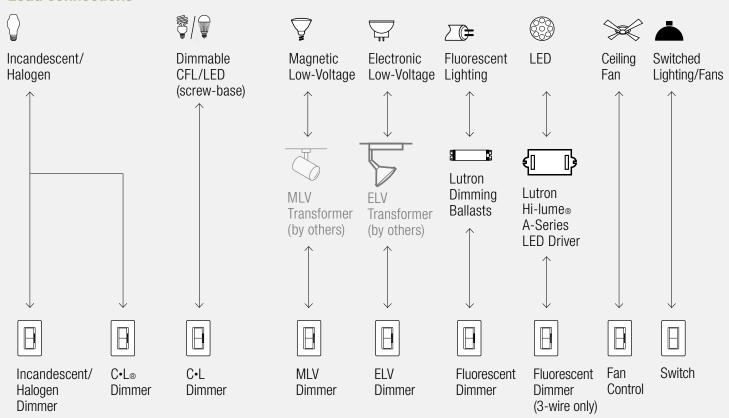

Control types (for 2 or more locations)

Dim from one location, switch from the others



For more information on ballasts, visit www.lutron.com/ballasts.

For more information on LED drivers, visit **www.lutron.com/LED**.

*For illustration purposes only.

Consult model number pages for specific voltage and capacity information.

Download complete Connection Diagrams