
NDTRIM3S50-M



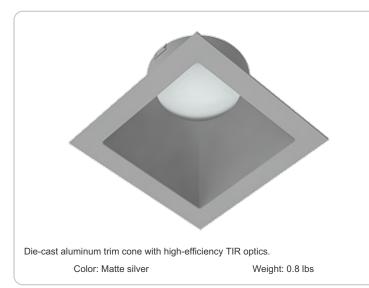

Project:		Туре:		
Prepared By: Driver Info		Date:		
		LED Info		
Туре:	Sold Separately	Watts:	0W	
120V:	See Rough-in*	Color Temp:	N/A	
208V:	See Rough-in*	Color Accuracy:	N/A	
240V:	See Rough-in*	L70 Lifespan:	See Rough-In*	
277V:	See Rough-in*	Lumens:	See Table Below*	
Input Watts:	0W0	Efficacy:	N/A	

Technical Specifications

Listings

UL Listing:

Suitable for wet locations in a covered ceiling

Optical

Photometrics:

Photometrics are based on prorated reports. Contact the RAB Lighting Design department for the most upto-date data.

Optics:

High-efficiency TIR optics available as a trimmed 50° beam downlight. Optic and trim cone included.

Construction

Trim Component:

This component must be ordered with New Construction Rough-In in order to make a complete fixture.

Trim Cone:

Matte silver square trim cone, die-cast aluminum.

Efficiency:

N/A

Trim: Trimmed

Lens:

Low-glare Solite glass eliminates "hot spots", and helps provide smooth, uniform light

Installation:

Nailer bar and butterfly brackets included; C-channels optional for acoustic tiles

Green Technology:

Mercury and UV free. RoHS compliant components.

Aperture Size:

3" Trim Module

Warranty:

Other


RAB warrants that our LED products will be free from defects in materials and workmanship for a period of five (5) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish.

Buy American Act Compliance:

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

NDTRIM3S50-M



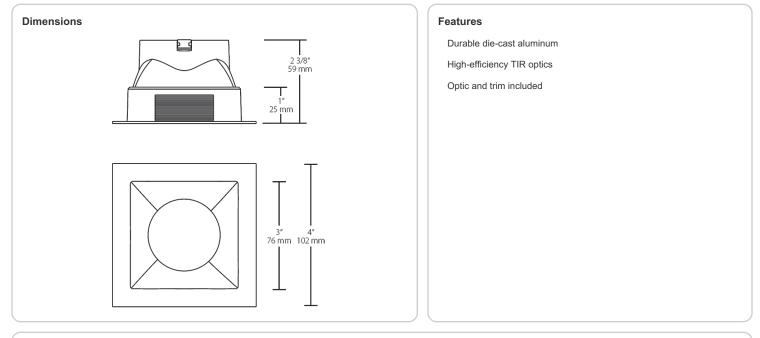

Ordering Matrix

Size	Shape	Optics	Color	Trim
3	S	50	М	
3 = 3"	S = Square	80 = 80° Downlight	B = Black	Blank = Trimmed
		50 = 50° Downlight	W = White	TL = Trimless
		40A = 40° Adjustable	M = Matte Silver	
		20A = 20° Adjustable		
		W = Wall Washer		
	3	3 S	3S50 $3 = 3$ " $S = Square$ $80 = 80^{\circ}$ Downlight $50 = 50^{\circ}$ Downlight $40A = 40^{\circ}$ Adjustable $20A = 20^{\circ}$ Adjustable	3 S 50 M 3 = 3" S = Square 80 = 80° Downlight B = Black 50 = 50° Downlight W = White 40A = 40° Adjustable M = Matte Silver 20A = 20° Adjustable M = Matte Silver