

RAB LIGHTING

LFP38W



JOB NAME: _____
 DATE: _____
 TYPE: _____

DESCRIPTION

Premium PAR38 Flood with large, molded high temperature black silicone gasket that totally seals lamp. Replaces RAB catalog #B. Die cast aluminum housing. EZ Grip locknut. Suitable for mounting within 4' of the ground. PAR38 or PAR20, 150 watt max. Lamp not supplied.

SPECIFICATIONS

Housings:

Precision die cast aluminum. Tuffy flood is molded plastic

Sockets:

Porcelain with all copper current carrying components and spring loaded center contact

Swivels:

Fully adjustable with sure-grip locks. 1/2" NPS threaded arm with locking swivel fits all standard mounting covers.

UL Listing:

Suitable for wet locations.

Lamp:

PAR38 or PAR20, 150 watt max. lamp not supplied

Patents:

RAB sensor and fixture designs are protected under U.S. and International Intellectual Property laws


Color:

White

Weight:

0.71

DIMENSIONS

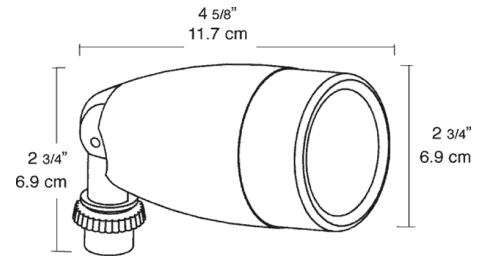

ORDERING INFORMATION

| Total Watts | Lamp Type | Lamp Base | Ballast | Starting Amps/ Operating Amps | | | | Input Watts | LAMP ANSI | Initial Lumens | Lamp Hours |
|----------------|--------------|--------------|---------|-------------------------------|------|------|------|----------------|--------------|-------------------|---------------|
| | | | | 120V | 208V | 240V | 277V | | | | |
| 150 | PAR20 | Medium | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 550 | 2500 |

Factory Installed Options

Add suffix to Catalog Number

Note: Specifications may change without notice

RAB Lighting, Inc. • 170 Ludlow Ave • Northvale, NJ 07647 • Tel: 888 RAB-1000 • Fax: 888 RAB-1232 • www.rabweb.com
 © 2009