

# RAB LIGHTING

## QB2VG



JOB NAME: \_\_\_\_\_  
 DATE: \_\_\_\_\_  
 TYPE: \_\_\_\_\_

### DESCRIPTION

Quartz Bullet floods come pre-assembled and pre-wired on C103 Universal Mounting plate. Lamps supplied.

### SPECIFICATIONS

**Finish:**

Chip and fade resistant polyester powder coating

**Housing:**

Precision die cast aluminum, 1/2" NPS threaded arm with locking swivel and EZ Grip lock nut fits all standard mounting covers

**Lens Gasket:**

High temperature silicone gasket stays in place during relamping

**Lens:**

Thick, tempered glass

**Reflector:**

Semi-specular anodized aluminum

**Replacement Lamps:**

**Sockets:**

Porcelain bi-pin GY 8 base with gold plated contacts and 250° C socket wires

**UL Listing:**

Suitable for wet locations. Suitable for mounting within 4' of the ground

**Installation:**

Twin 75w Flood Kit pre-assembled on C103 plate for easy installation

**Patents:**

RAB sensor and fixture designs are protected under U.S. and International Intellectual Property laws


**Color:**

Verde green

**Weight:**


2.1

### DIMENSIONS

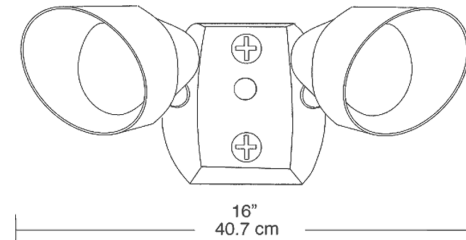

### PHOTOMETRIC

75w Fixture @ 4' Mounting Height  
 Aimed 60° Below Horizontal

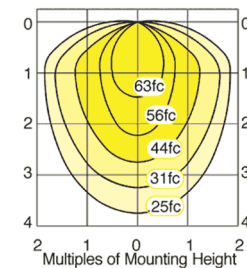

Mounting Height	Multiplier
4'	1.0
6'	.44
8'	.25
10'	.16
12'	.11

### ORDERING INFORMATION

**Quartz Halogen**

Lamp supplied with fixture

	Total Watts	Lamp Type	Lamp Base	Ballast	Starting Amps/ Operating Amps				Input Watts	LAMP ANSI	Initial Lumens	Lamp Hours
					120V	208V	240V	277V				
	75	T-4	bi-pin (GY8.0)	0	0	0	0	75	0	1500	1500	

**Factory Installed Options**

Add suffix to Catalog Number

Note: Specifications may change without notice