



# LOS800I/120



JOB NAME: \_\_\_\_\_

DATE: \_\_\_\_\_

TYPE: \_\_\_\_\_

## DESCRIPTION

Fits decorator wall plates with only 1/2" protrusion. 120 volts. Gangable. Full 180° view covers 1000 sq. ft Works with electronic ballasts. Can be wired in parallel. LED indicator, wallplate included. Can also be used as a ceiling sensor. Must have hot, common & ground wires in box.

## SPECIFICATIONS

### Compatibility:

Compatible with preset dimmers and electronic ballasts. Can be wired in parallel

### Maximum Reliability:

Superb small movement sensitivity within 18 feet. LOS1000 has "ZAPS" - Zero Arc Point Switching to protect relay contacts lengthen ballast and sensor life.

### UL Listing:

LOS800 & LOS1000: Indoor applications  
Smart Box & Tuff Dome: Wet locations

### Adjustments:

Time

### Ambient Light Sensing:

n/a

### Coverage Area:

1000sf

### Detection:

180° view covers 1000 sq. feet

### Incandescent & Fluorescent Watts Switched Weight:

800 watts @ 120 volts

### Manual Switch:

On - Manual / Off - Auto

### Maximum Energy Savings:

Light only when you need it. No ON switch so lights are never left on by mistake.

### Patents:

RAB sensor and fixture designs are protected under U.S. and International Intellectual Property laws.

### Power Consumption:

Negligible

### Ratings:

6.7 amps

### Time Delay:

8 seconds to 15 minutes

### Wiring:

Hot & common


### Color:

Ivory

### Weight:

0.3

## DETECTION PATTERN

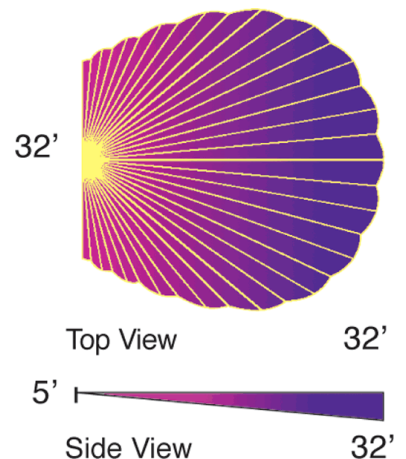

Note: Specifications may change without notice