



WP3CF42QT/PC



JOB NAME: _____
 DATE: _____
 TYPE: _____

DESCRIPTION

Large Cutoff Wallpack. All aluminum precision die cast construction with tempered glass refractor. Lamp supplied.

SPECIFICATIONS

Finish:

Chip and fade resistant polyester powder coating.

Housing:

Die cast aluminum 1/2" NPS tapped holes top, both sides and back for conduit or photocontrol. Hinged refractor frame, Continuous silicone rubber gasket.

Reflector:

Specular anodized aluminum, removable for installation. Symmetrical light pattern maximizes distance between fixtures.

UL Listing:

Suitable for wet locations. HID fixtures can be wired with 90° C supply wiring if supply wires are routed 3" away from the ballast.

Ballast Minimum Starting Temperature:

0

Patents:

RAB sensor and fixture designs are protected under U.S. and International Intellectual Property laws.

Photocell:

Button Photocell installed and wired for 120V

Quad Tap:

Fixture works with 120, 208, 240, and 277 volts


Color:

Bronze

Weight:


25.5

DIMENSIONS

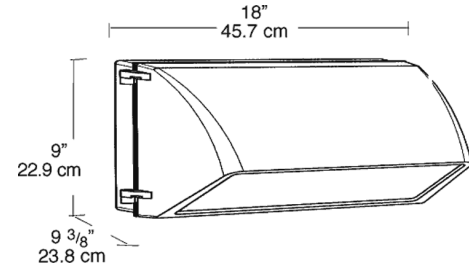

PHOTOMETRIC

250w HPS @ 16' Mounting Height

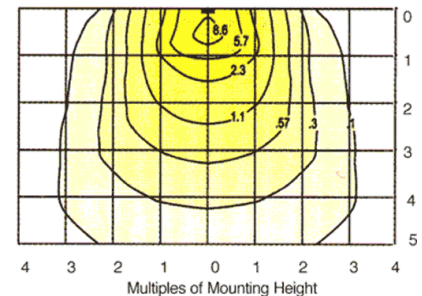

Mounting Height Multiplier	Watts	HPS	Multiplier MH
8'	200PS		.74
10'	250	1.0	.74
12'	250PS		.88
16'			1.0
20'			.6

ORDERING INFORMATION

Compact Fluorescent
Lamp supplied with fixture

Total Watts	Lamp Type	Lamp Base	Ballast
42	42W	GX24q-4 Triple	Elec HPF QT

Starting Amps/ Operating Amps				Input Watts	LAMP ANSI Lumens	Initial Hours	Lamp Hours
120V	208V	240V	277V				
0.38	0.3	0.2	0.17	46	3200	12000	

Factory Installed Options
Add suffix to Catalog Number

Tamperproof screws (/TP)
Swivel Photocontrol (/PCS)
Single fusing for 120 and 277 volt (/F)

Quartz Restrike (/QR)
Double fusing for 208 and 240 volt (/FF)
Button Photocontrol wired for 208 - 277 volt (/PC2)
Button Photocontrol (/PC)

Note: Specifications may change without notice