



2" LED RECESSED DOWNLIGHT 700 & 1000 LUMEN

1-1/4" LENSED PINHOLE

REMODEL

TC207LDR, TC210LDR

TC207LAR, TC210LAR

with 2332 Trim

PRODUCT DESCRIPTION

Recessed LED downlight luminaire with 1-1/4" lensed pinhole aperture delivers up to 665 lumens and is available with optical distributions approximating that of MR16 halogen lamps. Fixture has 50° visual cut-off for low aperture brightness. Low profile remodel housing is non-IC rated for use in non-insulated areas or where insulation is spaced at least 3" from housing.

PRODUCT SPECIFICATIONS

LED Light Engine Consistent fixture to fixture color consistency within a 2-step MacAdam ellipse • 2700K, 3000K, 3500K, or 4000K color temperatures are available with 80 CRI minimum • 2700K and 3000K are also available with 90 CRI minimum.

Modular Optics Available with field interchangeable optics in 18° Spot, 24° Narrow Flood, 35° Flood, and 45° wide flood distributions.

Reflector Die cast trim in white or black with black shield and diffuse lens that prevent visibility into housing.

Trims Style Self Flanged and Flush Mount styles are available
• For flush mount installations in drywall ceilings, specify the FMA2R adapter.

LED Driver Choice of two drivers to accommodate voltages from 120-277 volts AC at 50/60Hz • Dedicated 120V (-1) driver is dimmable with most incandescent, magnetic low voltage, and electronic low voltage dimmers • Universal Voltage (-U) driver is dimmable with most 0-10V protocol dimmers • For a list of compatible dimmers, refer to [ACLXLED2-DIM](#) • Power Factor > 0.9
• Field replaceable from above or below ceiling.

Life Rated for 50,000 hrs at 70% lumen maintenance.

Warranty 5 years from date of purchase on LED components
• Standard Juno Lighting Group product guarantee terms and conditions apply.

Codes/Labels UL and cUL listed for wet locations • Union made.

Remodel Installation Fixture installs from below the ceiling and secured to remodel ring.


Wiring Includes (2) 1/2" knockouts equipped with pryout slots and are compatible with flexible electrical supply only • Supplied with quick connect electrical connectors.

Ceiling Thickness 1/2" – 1 1/2" ceiling standard.




Type	Cat. No.
_____	_____
Project: _____	
Notes: _____	

DIMENSIONS



**TC207LDR, TC210LDR
TC207LAR, TC210LAR**

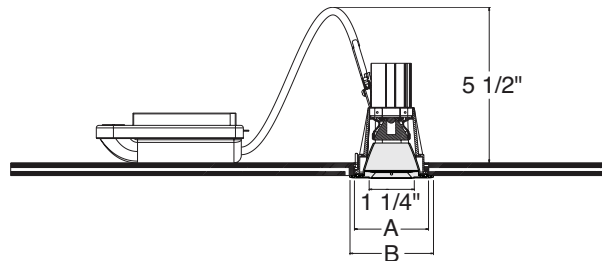

Trim Style	Cutout Size (A)	Trim O.D. (B)
Self Flanged Trims	2.953" (75mm)	3.20"
Flush Mount Trims (Drywall Ceiling)	3"	2.875"

Note: An accurate hole saw is recommended for best results.

ELECTRICAL DATA

Lumen Package	700			1000		
	Dedicated 120V (-1)	Universal Voltage (-U)		Dedicated 120V (-1)	Universal Voltage (-U)	
Voltage	120	120	277	120	120	277
Input Power	10.1	9.6	9.6	14.8	14.8	14.6
Input Current	0.09	0.08	0.04	0.12	0.12	0.06
Frequency	50/60Hz	50/60Hz		50/60Hz	50/60Hz	
Power Factor	0.99	0.99	0.93	0.99	0.99	0.95

2" LED RECESSED DOWNLIGHT 700 & 1000 LUMEN

1-1/4" LENSED PINHOLE

REMODEL



**TC207LDR, TC210LDR
TC207LAR, TC210LAR
with 2332 Trim**

Ordering Information Housing, trim and accessories each ordered separately

Example: **TC207LDR-830-N-1**

Series	CRI/CCT	Optic	Driver
TC207LDR 700 lm Downlight, Non-IC	827 80 CRI, 2700K	S 18° Spot	I 120V, Phase Dimming
TC210LDR 1000 lm Downlight, Non-IC	830 80 CRI, 3000K	N 24° Narrow Flood	U 120-277V, 0-10V Dimming
TC207LAR 700 lm Adjustable, Non-IC	835 80 CRI, 3500K	F 35° Flood	
TC210LAR 1000 lm Adjustable, Non-IC	840 80 CRI, 4000K	W 45° Wide Flood	
	927 90 CRI, 2700K		
	930 90 CRI, 3000K		

Example: **2332BHZ-WH-SF**

Trim/Description		
		
Self Flanged	Flush Mount ¹	Description
2332BHZ-BL-SF	2332BHZ-BL-FM	Black Trim
2332BHZ-WH-SF	2332BHZ-WH-FM	White Trim

¹Flush Mount trims must be used with Flush Mount Adapter in drywall ceilings, ordered separately.

Product specifications subject to change without notice.

Accessories

Cat. #	Description
FMA2R	Remodel Flush Mount Adapter for drywall ceilings
TIR-ACLX2-SP	18° Spot Optic
TIR-ACLX2-NFL	24° Narrow Flood Optic
TIR-ACLX2-FL	35° Flood Optic
TIR-ACLX2-WFL	45° Wide Flood Optic
AF2-SPREAD	35mm Linear Spread Optic Film
AF2-DIFFUSION	35mm Diffusion Optic Film
EMI-20	20W Emergency Lighting Inverter


LUMEN OUTPUT MULTIPLIERS

Color Temperature	CRI	Multiplier
2700K	80	0.93
3000K	80	1.00
3500K	80	1.02
4000K	80	1.06
2700K	90	0.71
3000K	90	0.77



PHOTOMETRIC REPORT

Test Report #: PT02140111
 Catalog No: IC/TC210LDR-830-S-1
 with 2332BHZ trim
 Luminaire Spacing Criterion: 0.38
 Luminaire LPW: 38



CANDLEPOWER DISTRIBUTION (Candelas)

Degrees Vertical	0°
0	2804
5	2421
15	841
25	168
35	33
45	8
55	3
65	1
75	0
85	0
90	0

AVERAGE INITIAL FOOTCANDLES

Multiple Units (Square Array, 60'x60' room)
 Ceiling 80% Wall 50% Floor 20%

Spacing	RCR1	RCR3	RCR5
4.0'	40	36	33
5.0'	25	23	21
6.0'	18	16	15
7.0'	14	13	12
8.0'	11	10	9
9.0'	9	8	7
10.0'	6	6	5

INITIAL FOOTCANDLES

(One Unit, 14.8W, 22.3° Beam)


Distance to Illuminated Plane (Feet)	Footcandles Beam Center	Beam Diameter
6	77.9	2.4'
8	43.8	3.2'
10	28.0	3.9'
12	19.5	4.7'

LUMINANCE (Average cd/m²)

Degrees	Average Luminance
45	16176
55	6390
65	3470
75	1698
85	0

PHOTOMETRIC REPORT

Test Report #: PT10142004R
 Catalog No: IC/TC210LDR-830-N-1
 with 2332BHZ trim
 Luminaire Spacing Criterion: 0.42
 Luminaire LPW: 35



CANDLEPOWER DISTRIBUTION (Candelas)

Degrees Vertical	0°
0	2199
5	1951
15	802
25	186
35	39
45	10
55	3
65	1
75	0
85	0
90	0

AVERAGE INITIAL FOOTCANDLES

Multiple Units (Square Array, 60'x60' room)
 Ceiling 80% Wall 50% Floor 20%

Spacing	RCR1	RCR3	RCR5
4.0'	37	33	31
5.0'	24	21	20
6.0'	16	15	14
7.0'	13	12	11
8.0'	10	9	9
9.0'	8	7	7
10.0'	6	5	5

INITIAL FOOTCANDLES

(One Unit, 14.8W, 24.7° Beam)


Distance to Illuminated Plane (Feet)	Footcandles Beam Center	Beam Diameter
6	61.1	2.6'
8	34.4	3.5'
10	22.0	4.4'
12	15.3	5.3'

LUMINANCE (Average cd/m²)

Degrees	Average Luminance
45	18457
55	6904
65	3470
75	1698
85	0

PHOTOMETRIC REPORT

Test Report #: PT10142006R
 Catalog No: IC/TC210LDR-830-F-1
 with 2332BHZ trim
 Luminaire Spacing Criterion: 0.60
 Luminaire LPW: 45



CANDLEPOWER DISTRIBUTION (Candelas)

Degrees Vertical	0°
0	1607
5	1534
15	1001
25	364
35	88
45	19
55	5
65	1
75	0
85	0
90	0

AVERAGE INITIAL FOOTCANDLES

Multiple Units (Square Array, 60'x60' room)
 Ceiling 80% Wall 50% Floor 20%

Spacing	RCR1	RCR3	RCR5
4.0'	47	42	37
5.0'	30	27	24
6.0'	21	18	17
7.0'	17	15	13
8.0'	13	12	11
9.0'	10	9	8
10.0'	7	7	6

INITIAL FOOTCANDLES

(One Unit, 14.8W, 35.6° Beam)


Distance to Illuminated Plane (Feet)	Footcandles Beam Center	Beam Diameter
6	44.7	3.9'
8	25.1	5.1'
10	16.1	6.4'
12	11.2	7.7'

LUMINANCE (Average cd/m²)

Degrees	Average Luminance
45	36291
55	11248
65	4857
75	1132
85	0

PHOTOMETRIC REPORT

Test Report #: PT10142008R
 Catalog No: IC/TC210LDR-830-W-1
 with 2332BHZ trim
 Luminaire Spacing Criterion: 0.62
 Luminaire LPW: 31



CANDLEPOWER DISTRIBUTION (Candelas)

Degrees Vertical	0°
0	1014
5	972
15	654
25	258
35	76
45	17
55	4
65	1
75	0
85	0
90	0

AVERAGE INITIAL FOOTCANDLES

Multiple Units (Square Array, 60'x60' room)
 Ceiling 80% Wall 50% Floor 20%

Spacing	RCR1	RCR3	RCR5
4.0'	32	28	25
5.0'	20	18	16
6.0'	14	13	11
7.0'	12	10	9
8.0'	9	8	7
9.0'	7	6	6
10.0'	5	5	4

INITIAL FOOTCANDLES

(One Unit, 14.8W, 36.7° Beam)

Distance to Illuminated Plane (Feet)	Footcandles Beam Center	Beam Diameter
6	28.2	4.0'
8	15.8	5.3'
10	10.1	6.6'
12	7.0	8.0'

LUMINANCE (Average cd/m²)

Degrees	Average Luminance
45	32144
55	8436
65	3123
75	1132
85	0

Fixtures tested to IES recommended standard for solid state lighting per LM-79-08. Photometric performance on a single unit represents a baseline of performance for the fixture. Results may vary in the field. Photometry is at 3000K CCT.



1300 S. Wolf Road • Des Plaines, IL 60018 • Phone (847) 827-9880 • Fax (847) 827-2925
 220 Chrysler Drive • Brampton, Ontario • Canada L6S 6B6 • Phone (905) 792-7335 • Fax (905) 792-0064
 Visit us at www.junolightinggroup.com