





TRIM STYLES




Deep Reflector

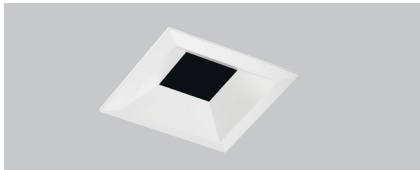


Bevels

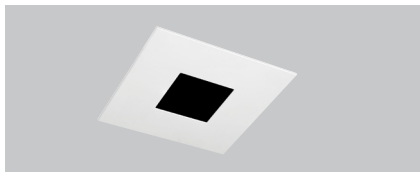

Pinhole

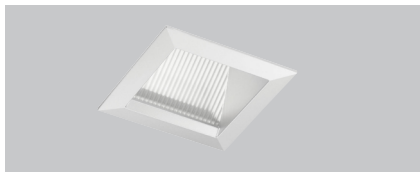

Lensed Wall Wash

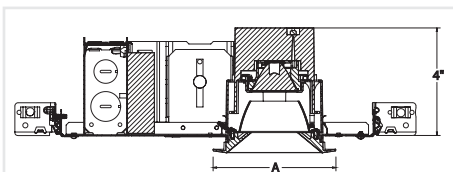

A Dimension:
Self Flanged: 4.625"
Flangeless: 3.875"

FEATURES

AFFORDABLE & ELEGANT PRECISION RECESSED

- Complete family of recessed downlight, adjustable, and wall wash luminaires
- Available with reflector, bevel and pinhole trims
- Coordinated apertures with Aculux AX3 family

QUIET AND GLARE FREE APERTURES

- Deep source regression with 45-degree visual cutoff
- Total Internal Reflection (TIR) Optics in four (4) beam spreads

EXCELLENT PERFORMANCE

- Up to 1500 lumens delivered!
- Exceptionally consistent color with < 2SDCM
- Excellent color rendition with 80+ CRI | 90+ CRI Available
- WarmDim® option mimics halogen dimming (3000K - 1800K)



WarmDim®



PERFORMANCE

Static White*

LUMEN PACKAGE	WATTS IN	DELIVERED LUMENS	EFFICACY (LPW)
04LM	5	511	102
08LM	8	887	111
12LM	12	1344	112
15LM	16	1667	104


WarmDim®

LUMEN PACKAGE	WATTS IN	DELIVERED LUMENS	EFFICACY (LPW)
08LM	12	860	71
10LM	16	1103	69


*Performance with NT3SQD at 3000K | 80CRI

Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25 °C.

FLANGE STYLES

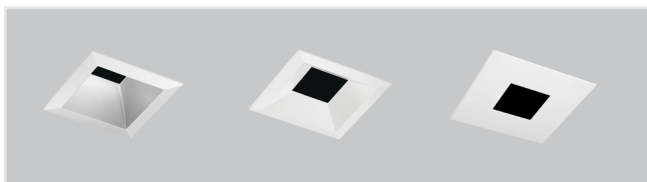

Flanged

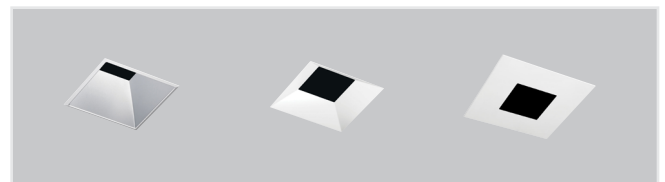

Flangeless (Gypsum)



ORDERING INFORMATION

EXAMPLE: INIT3SQ D 15LM 30K 90CRI 25D EZ1 MVOLT NT3SQD CD SF

Housing Style	Lumens	CCT	CRI	Beam	Driver	Voltage ⁴	Ratings	Options
INIT3SQ D New Construction Downlight & Wall Wash	Static White		80CRI 90CRI ²	18D 18° beam 25D 25° beam 35D 35° beam 50D 50° beam	FPC Phase cut dim (1% min) EZ1 eLdoLED 0-10V (linear 1% min) GZ1 0-10V (Linear 1% min)	120 277 MVOLT (120-277)	(blank) Non-IC Rated CP ⁵ Chicago Plenum ICAT ⁵ IC Rated, Air-tight	NLIGHT ⁶ nLight Dimming E5WT20R ⁷ Emergency 5W battery pack with remote test switch, T20 compliant E5WR ⁷ Emergency 5W battery pack with remote test switch
	04LM ¹ 400 lumens 08LM 800 lumens 12LM 1200 lumens 15LM 1500 lumens	27K 2700K 30K 3000K 35K 3500K 40K 4000K						
INIT3SQ DR Remodel Downlight & Wall Wash	WarmDim[®]		90CRI	25D 25° beam 35D 35° beam 50D 50° beam	ECOD ³ Lutron EcoSystem (1% min)			
	08LM 800 Lumens 10LM ⁹ 1000 lumens	WDIM HALR 3000K - 1800K						


Downlight Trim	Reflector Finish	Flange Style	Trim Lens Environment	Ceiling Installation
Reflector NT3SQD Deep Reflector 	W White Paint CD Clear Diffuse BD Black Diffuse WTD Wheat Diffuse	Flanged SF Self Flanged (same finish as reflector) WHSF Self Flanged, White Painted Flange Flangeless⁸ FM Flangeless	(blank) Open Damp Location WSOL Solite Wet Location	Flanged (blank) Ceiling 0.5" - 1.5" Flangeless (Gypsum) NT3SQFMA Ceiling 0.5" - 1.5"
Bevels NT3SQDBV BD Bevel Downlight NT3SQSHDBV BD Dead Front, Non Conductive Shower Bevel Downlight 	Finish & Flange Style Flanged WHSF White, Flanged BLSF Black, Flanged Flangeless⁸ WHFM White, Flangeless BLFM Black, Flangeless		(blank) Open Damp Location WSOL Solite Wet Location	Flanged (blank) Ceiling 0.5" - 1.5" Flangeless (Gypsum) NT3SQFMA Ceiling 0.5" - 1.5"
Pinhole NT3SQDPIN BD 1 3/4" Pinhole Downlight 				

Wall Wash Trim	Reflector Finish	Flange Style	Environment	Ceiling Installation
Lensed Wall Wash NT3SQWW Lensed Wall Wash *Must specify 25D beam with wall wash trim	W White Paint CD Clear Diffuse BD Black Diffuse WTD Wheat Diffuse	Flanged SF Self Flanged (same finish as reflector) WHSF Self Flanged, White Painted Flange Flangeless⁸ FM Flangeless	(blank) Damp Location	Flanged (blank) Ceiling 0.5" - 1.5" Flangeless (Gypsum) NT3SQFMA Ceiling 0.5" - 1.5"

REFLECTOR FINISHES



BEVEL & PINHOLE FINISHES

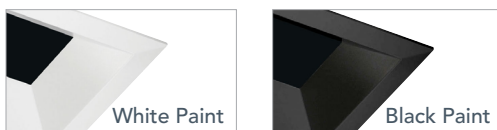

ORDERING NOTES

- 04LM available with FPC driver only.
- 90CRI not available on 40K.
- ECOD not available with ICAT at 15LM.
- MVOLT standard on EZ1, GZ1, ECOD unless NLIGHT specified. Must be 120 for, FPC.
- CP & ICAT available on new construction only.
- NLIGHT available on Non-IC with EZ1 only. Must specify 120 or 277 volts.
- E5WT20R & E5WR not available with remodel, ICAT, or CP.
- For flangeless trims, must specify flangeless installation (NT3SQFMA).
- 10LM WDIM not available with ICAT or CP.

ds design select

Items marked by a shaded background qualify for the Design Select program and ship in 15 days or less. To learn more about Design Select, visit www.acuitybrands.com/designselect.

*See ordering tree for details

Maximum order quantity for design select lead times is 75.



ACCESSORIES

Beam Control Lenses & Filters		Replacement Optics		Optional Installation Accessories
Beam Control Lenses		UV Filter & Color Correction		Bar Hangers
DIFF 200 Diffuse Spread Lens		UVF 200 UV Filter Lens		HB26 26" C-Channel Bar Hangers
SOLITE 200 Solite Uniformity Lens		DCCF 200 HAL4250 Daylight Blue Correction		HB50 50" C-Channel Bar Hangers
PRISM 200 Prismatic Lens				LB27 27" Linear Bar Hangers
LSPREAD 200 Linear Spread Lens				<i>Note: Fixture supplied with residential style bar hangers (except when specified with battery)</i>
HCLBL200 Hexcell Louver				
		Static White Optics		
		NT3OPT/18D 18° beam		
		NT3OPT/25D 25° beam		
		NT3OPT/35D 35° beam		
		NT3OPT/50D 50° beam		
		WarmDim® Optics		
		NT3WDOPT/25D 25° beam		
		NT3WDOPT/35D 35° beam		
		NT3WDOPT/50D 50° beam		

PRODUCT SPECIFICATIONS

FIELD INTERCHANGEABLE LED LIGHT ENGINE

- <2SDCM Binning
- 2700K | 3000K | 3500K | 4000K CCT
- 80+ CRI available for all CCTs
- 90+ CRI available for 2700K, 3000K, 3500K
- WarmDim mimics halogen, with CCT shifting from 3000K to 1800K when dimmed.
- Future proof and easy to maintain - serviceable from below the ceiling

OPTICAL SYSTEM

- 45° visual cutoff to source and source image
- Field interchangeable TIR optics from 18° FWHM to 50° FWHM provide smooth, striation-free beams
- Accommodates 1 beam control lens or filter
- UGR is zero for fixtures aimed at nadir with a cut-off equal to or less than 60deg, per CIE 117-1996 Discomfort Glare in Interior Lighting. [UGR FAQs](#)

HIGH QUALITY TRIMS

- Available with die cast bevels, pinholes, and angle cut reflectors
- Non-corrosive, polycarbonate bevel option for shower applications
- Flanged and flangeless for gypsum
- Must specify NT3SQFMA for gypsum flangeless installation

FIELD REPLACEABLE DRIVER

- Accommodates 120-277V input and multiple control protocols
- Dims without perceived flicker to <1% depending on driver specified
- Field replaceable from below the ceiling
- >0.9 Power Factor

BUY AMERICAN ACT

- This product is assembled in the USA and meets the Buy America(n) government procurement requirements under FAR, DFARS and DOT regulations.
- Please refer to www.acuitybrands.com/resources/buy-american for additional information.

WARRANTY & RATED LIFE

- LED is rated for >50,000 hours at 70% lumen maintenance
- 5- year limited warranty. This is the only warranty provided and no other statements in this specification sheet create any warranty of any kind. All other express and implied warranties are disclaimed. Complete warranty terms located at: www.acuitybrands.com/support/warranty/terms-and-conditions

EMERGENCY BATTERY

- Provides a minimum of 400 lumens (3000K, 80CRI) for minimum duration of 90 minutes.
- Above ceiling access required.
- Supplied with remote test switch
- E5WT20R option is CEC T20 Compliant

CEILING THICKNESS

- Accommodates ½" to 1 1/2" ceiling thickness

INSTALLATION

- New construction or remodel (install from below) are available.
- Residential style bar hanger provided with all new construction housings except when specified with emergency battery.
- Vertically adjustable mounting brackets (butterfly brackets) are provided on non-ICAT new construction housings.

JUNCTION BOX

- New construction housings are rated for (4) No. 12 AWG 90°C through branch circuit conductors (excludes ECOD driver)
- New Construction housings include (6) ½", (1) ¾", (4) Non-metallic sheathed cable knock-outs.
- Remodel housings feature (8) ½" knockouts suitable for daisy chain wiring.
- Push-in electrical connectors for field connections.

CODES & LABELS

- UL & cUL listed for through branch wiring (excludes ECOD), damp location. Listed for wet location with WSOL option. NT3SQSHDBV option is IP65 rated and can be used to comply with dead front and/or non-conductive lighting electrical code requirements.
 - ICAT meets energy code air leakage requirements per ASTM E283
 - ENERGY STAR® certified with NT3SQD and NT3SQDBV (excluding 50D beam) trims for static white @ 80CRI and NT3SQD trims (excluding: BD finish, ECOD driver) for warmdim.
 - Title 24, Part 6: JA-8 Compliant with 90CRI and ICAT. Refer to CEC T24 website for compliant trims
 - ICAT housings are rated for direct contact with insulation
 - 04LM ICAT & 08LM ICAT housings* are rated for direct contact with insulation, including open and closed cell spray foam with a maximum R-value of 7.2R/in. This allows use in ceiling cavities insulated up to R60.
 - 12LM ICAT housings* are rated for direct contact with insulation, including open cell spray foam with a maximum R-value of 3.8R/in. They are not suitable for use with closed cell spray foam.
 - NT3SHABV option can be used to comply with dead front and/or non-conductive lighting electrical code requirements. Flanged (SF) version is certified to IP65
- Note: Options: "ECOS2", "ECOD" & "WDIM HALR" are excluded and not suitable for use with spray foam insulation. 12LM ICAT housings are only suitable for use with open cell spray foam, and not suitable for use with closed cell

A+ CAPABLE LUMINAIRE


- This item is an A+ capable luminaire, which has been designed and tested to provide consistent color appearance and out-of-the-box control compatibility with simple commissioning when used with Acuity Brands controls products.
- All configurations of this luminaire are calibrated and tested to meet the Acuity Brands' specifications for chromatic consistency – including color rendering, color fidelity and color temperature tolerance around standard CIE chromaticity coordinates.
- To learn more about A+ standards, specifications, and testing visit www.acuitybrands.com/aplus.



DIMENSIONS


NEW CONSTRUCTION

Ceiling Cutout: 3.75" x 3.75" (Refer to installation instructions for flangeless ceiling cutout)
Ceiling Thickness Range: 1/2" – 1 1/2" (see ordering matrix)

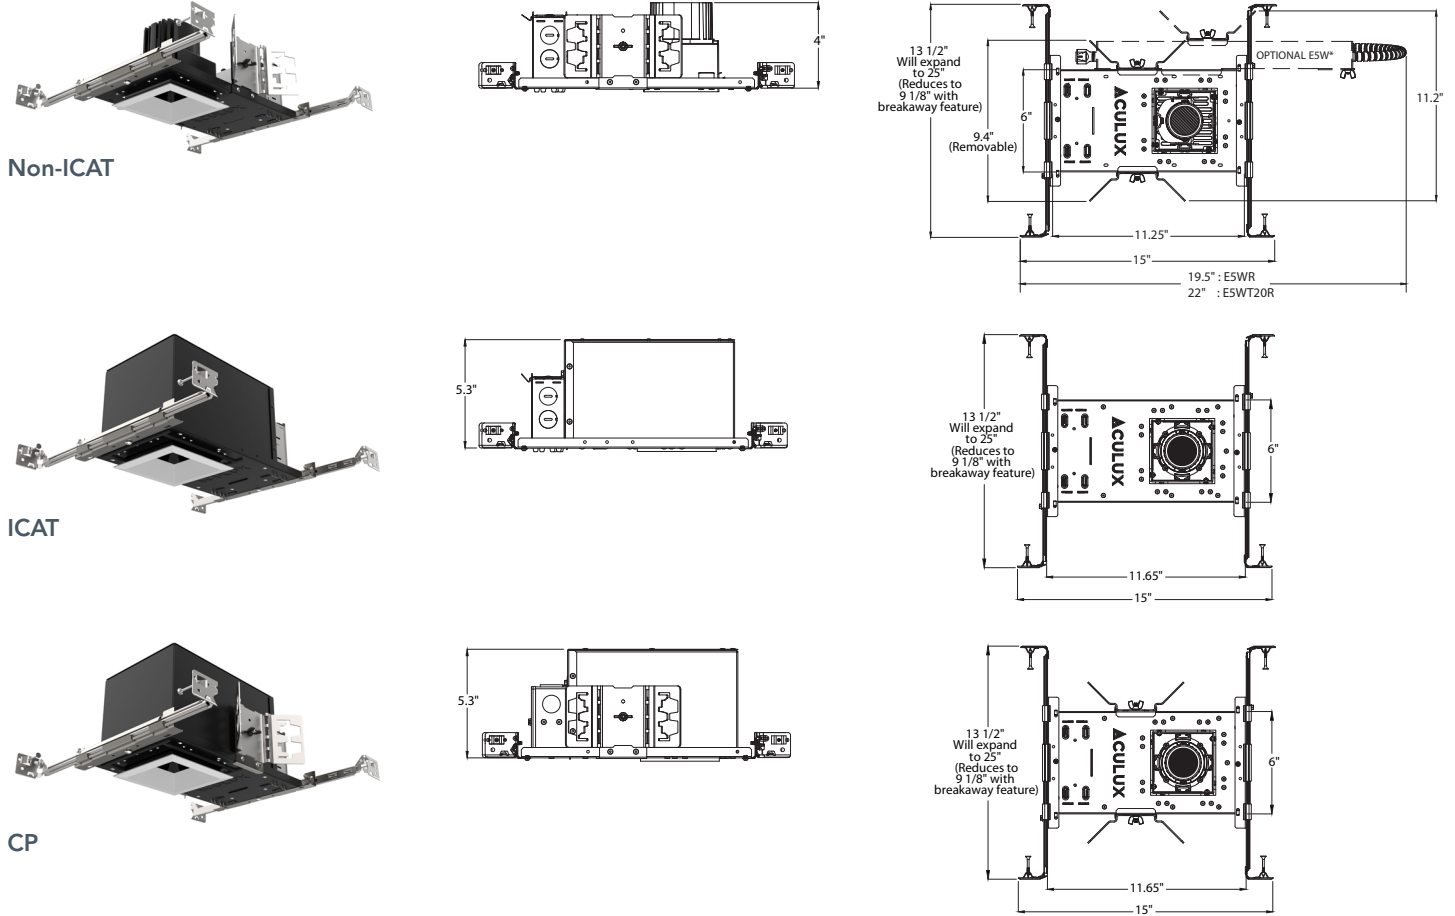

REMODEL (install from below)

Ceiling Cutout: 4.0" x 4.0" (Refer to installation instructions for flangeless ceiling cutout)
Ceiling Thickness Range: 1/2" – 1 1/2" (see ordering matrix)

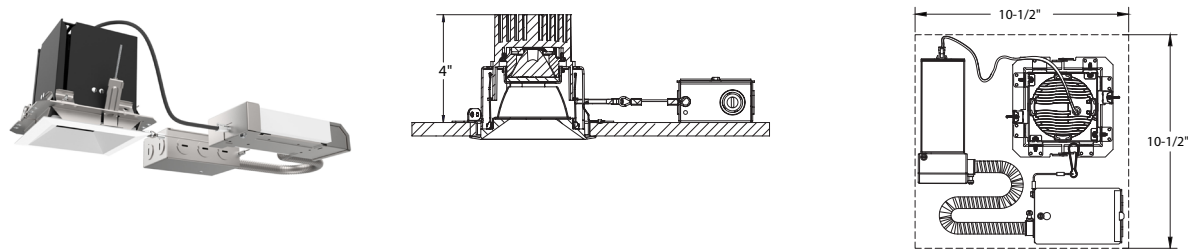

ELECTRICAL SPECIFICATIONS

LUMEN PACKAGE	Static White				WarmDim®							
	04LM		08LM		12LM		15LM		08LM		10LM	
Voltage	120	277	120	277	120	277	120	277	120	277	120	277
Input Watts	4.6	4.8	7.7	7.8	11.9	12.3	16.1	16.4	12.1	13.2	16.1	17.0
Input Current	0.04	0.02	0.06	0.03	0.1	0.05	0.13	0.06	0.10	0.06	0.14	0.07
Frequency	50/60HZ		50/60HZ		50/60HZ		50/60HZ		50/60HZ		50/60HZ	
Power Factory	.9 MIN.		.9 MIN.		.9 MIN.		.9 MIN.		.9 MIN.		.9 MIN.	



PHOTOMETRICS - NT3SQD

Tested in accordance to IESNA LM79

18 Degree Beam

INIT3SQ D 12LM 30K 80CRI 18D EZ1 MVOLT NT3SQD CD, input watts: 12.1, delivered lumens: 1281, LPW: 105.9, S/MH: 0.30, test no.: 19-953-01

0° 30° 60° 70° 80° 90°	CP Summary				Zonal Lumen Summary				Coefficients of Utilization												Cone of Light			Luminance (cd/sq.m)	
	0°	Zone	Lumens	% Fixture	pf	80%			20%			50%			Mounting Height	Initial FC Center Beam	Beam Diameter	Average Luminance							
					pc	50%	30%	10%	50%	30%	10%	50%	30%	10%											
0°	0°	0°-30°	1,227	96%	0	121	121	121	119	119	119	113	113	113	6.0	218.2	1.9	45°	1,441						
30°	5°	0°-40°	1,267	99%	1	115	113	112	113	111	110	109	108	107	8.0	122.7	2.5	55°	952						
60°	15°	0°-60°	1,278	100%	2	110	107	105	108	106	103	105	103	101	10.0	78.5	3.1	65°	734						
70°	25°	0°-90°	1,281	100%	3	106	102	99	104	101	98	102	99	97	12.0	54.5	3.7	75°	513						
80°	35°		414		4	102	98	95	100	97	94	98	95	93	14.0	40.1	4.4	85°	339						
90°	45°		7		5	98	94	91	97	93	90	95	92	90											
	55°		4		6	95	91	88	94	90	87	93	89	87											
	65°		2		7	92	88	85	91	87	85	90	87	84											
	75°		1		8	89	85	82	89	85	82	88	84	82											
	85°		0		9	87	83	80	86	82	80	86	82	80											
	90°		0		10	84	80	78	84	80	78	83	80	78											

25 Degree Beam

INIT3SQ D 12LM 30K 80CRI 25D EZ1 MVOLT NT3SQD CD, input watts: 12.1, delivered lumens: 1294, LPW: 106.9, S/MH: 0.51, test no.: 19-953-08

0° 30° 60° 70° 80° 90°	CP Summary				Zonal Lumen Summary				Coefficients of Utilization												Cone of Light			Luminance (cd/sq.m)	
	0°	Zone	Lumens	% Fixture	pf	80%			20%			50%			Mounting Height	Initial FC Center Beam	Beam Diameter	Average Luminance							
					pc	50%	30%	10%	50%	30%	10%	50%	30%	10%											
0°	0°	0°-30°	1,226	95%	0	120	120	120	118	118	118	112	112	112	6.0	121.8	3.2	45°	1,336						
30°	5°	0°-40°	1,279	99%	1	114	112	110	112	110	108	108	106	105	8.0	68.5	4.3	55°	901						
60°	15°	0°-60°	1,291	100%	2	108	105	103	107	104	102	104	101	99	10.0	43.9	5.4	65°	699						
70°	25°	0°-90°	1,294	100%	3	104	100	97	102	99	96	100	97	95	12.0	30.5	6.5	75°	513						
80°	35°		45		4	99	95	92	98	94	91	96	93	90	14.0	22.4	7.5	85°	339						
90°	45°		6		5	95	91	88	95	91	88	93	89	87											
	55°		4		6	92	88	84	91	87	84	90	86	84											
	65°		2		7	89	84	81	88	84	81	87	83	81											
	75°		1		8	86	81	78	85	81	78	84	81	78											
	85°		0		9	83	79	76	83	79	76	82	78	75											
	90°		0		10	80	76	73	80	76	73	79	76	73											

35 Degree Beam

INIT3SQ D 12LM 30K 80CRI 35D EZ1 MVOLT NT3SQD CD, input watts: 12.1, delivered lumens: 1344, LPW: 111.1, S/MH: 0.60, test no.: 19-953-15

0° 30° 60° 70° 80° 90°	CP Summary				Zonal Lumen Summary				Coefficients of Utilization												Cone of Light			Luminance (cd/sq.m)	
	0°	Zone	Lumens	% Fixture	pf	80%			20%			50%			Mounting Height	Initial FC Center Beam	Beam Diameter	Average Luminance							
					pc	50%	30%	10%	50%	30%	10%	50%	30%	10%											
0°	0°	0°-30°	1,223	91%	0	120	120	120	117	117	117	112	112	112	6.0	87.8	4.0	45°	1,232						
30°	5°	0°-40°	1,326	99%	1	113	111	109	111	109	107	107	105	104	8.0	49.4	5.3	55°	850						
60°	15°	0°-60°	1,341	100%	2	107	103	101	105	102	100	102	99	97	10.0	31.6	6.6	65°	664						
70°	25°	0°-90°	1,344	100%	3	101	97	94	100	96	93	97	94	92	12.0	22.0	8.0	75°	513						
80°	35°		122		4	96	92	88	95	91	88	93	90	87	14.0	16.1	9.3	85°	339						
90°	45°		6		5	92	87	84	91	87	83	89	86	83											
	55°		3		6	88	83	80	87	83	79	86	82	79											
	65°		2		7	84	79	76	84	79	76	82	78	75											
	75°		1		8	81	76	73	80	76	72	79	75	72											
	85°		0		9	78	73	70	77	73	69	76	72	69											
	90°		0		10	75	70	67	74	70	67	74	69	67											

50 Degree Beam

INIT3SQ D 12LM 30K 80CRI 50D EZ1 MVOLT NT3SQD CD, input watts: 12.1, delivered lumens: 1086, LPW: 89.8, S/MH: 0.73, test no.: 19-953-22

0° 30° 60° 70° 80° 90°	CP Summary				Zonal Lumen Summary				Coefficients of Utilization												Cone of Light			Luminance (cd/sq.m)	
	0°	Zone	Lumens	% Fixture	pf	80%			20%			50%			Mounting Height	Initial FC Center Beam	Beam Diameter	Average Luminance							
					pc	50%	30%	10%	50%	30%	10%	50%	30%	10%											
0°	0°	0°-30°	865	80%	0	120	120	120	117	117	117	112	112	112	6.0	48.3	5.1	45°	2,965						
30°	5°	0°-40°	1,038	96%	1	112	110	107	110	108	106	106	104	102	8.0	27.2	6.8	55°	2,214						
60°	15°	0°-60°	1,078	99%	2	105	101	98	103	100	97	100	97	95	10.0	17.4	8.5	65°	1,677						
70°	25°	0°-90°	1,086	100%	3	98	94	90	97	93	89	94	91	88	12.0	12.1	10.2	75°	1,255						
80°	35°		231		4	93	88	84	92	87	83	89	85	82	14.0	8.9	11.9	85°	1,016						
90°	45°		14		5	87	82	78	87	82	78	85	80	77											
	55°		9		6	83	77	73	82	77	73	81	76	73											
	65°		5		7	78	73	69	78	73	69	77	72	68											
	75°		2		8	75	69	65	74	69	65	73	68	65											
	85°		1		9	71	65	62	70	65	62	70	65	61											
	90°		0		10	68	62	59	67	62	59	66	62	58											

LUMEN | CBCP MULTIPLIERS

CCT	80+ CRI	90+ CRI	04LM	08LM	10LM	12LM	15LM
2700K	0.96	0.83	0.38	0.66	0.85	1.00	1.24
3000K	1.00	0.86					
3500K	1.03	0.89					
4000K	1.05	-					
WDIM HALR	-	0.97					

REFLECTOR FINISH					LENS OPTION	
CS	CD	W	BS	WTD	(blank)	WSOL
1.01	1.0	1.01	0.98	0.99	1.0	0.94

*Refer to website for additional photometry (alternate trims, CCT/CRI, lumen packages)




PHOTOMETRICS - NT3SQDBV

Tested in accordance to IESNA LM79


18 Degree Beam

INIT3SQ D 12LM 30K 80CRI 18D EZ1 MVOLT NT3SQDBV BD, input watts: 11.9, delivered lumens: 994, LPW: 83.5, S/MH: 0.29, test no.: 19-953-03P15

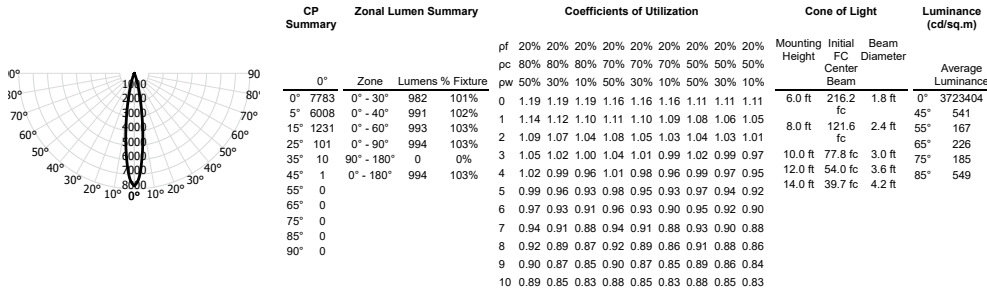


25 Degree Beam

INIT3SQ D 12LM 30K 80CRI 25D EZ1 MVOLT NT3SQDBV BD, input watts: 11.9, delivered lumens: 1061, LPW: 89.2, S/MH: 0.48, test no.: 19-953-10P15

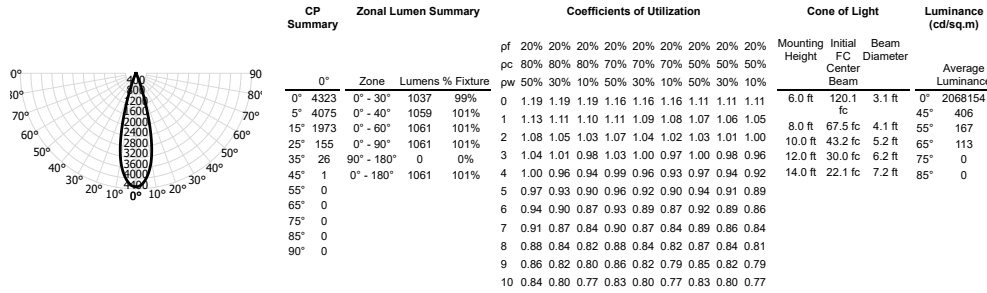


35 Degree Beam

INIT3SQ D 12LM 30K 80CRI 35D EZ1 MVOLT NT3SQDBV BD, input watts: 11.9, delivered lumens: 1144, LPW: 96.1, S/MH: 0.55, test no.: 19-953-17P15

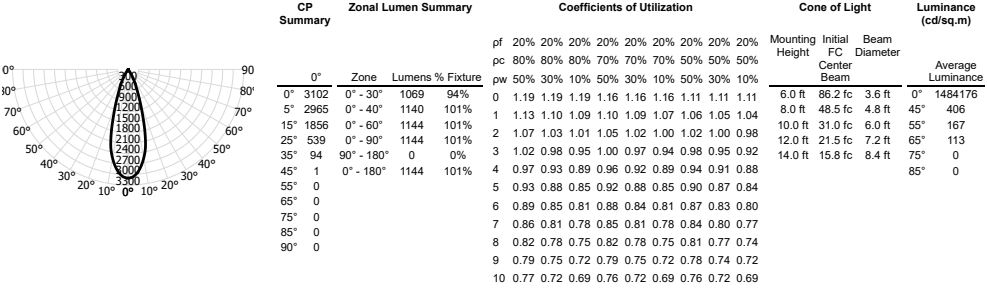

50 Degree Beam

INIT3SQ D 12LM 30K 80CRI 50D EZ1 MVOLT NT3SQDBV BD, input watts: 11.9, delivered lumens: 829, LPW: 69.7, S/MH: 0.67, test no.: 19-953-24P15

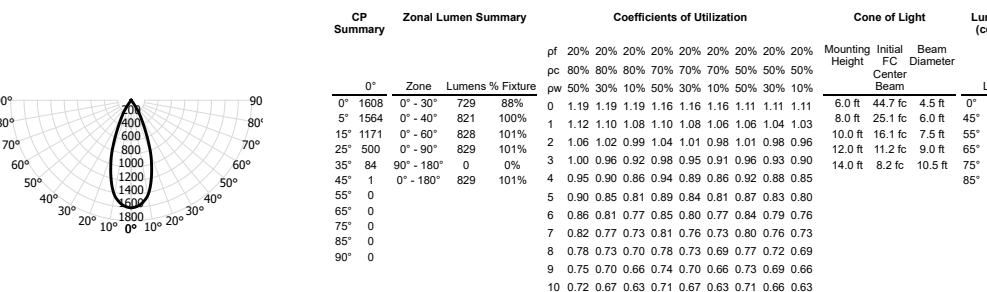

LUMEN | CBCP MULTIPLIERS


CCT	80+ CRI	90+ CRI	04LM	08LM	10LM	12LM	15LM
2700K	0.96	0.83	0.38	0.66	0.85	1.00	1.24
3000K	1.00	0.86	LENS OPTION				
3500K	1.03	0.89	(blank)	WSOL			
4000K	1.05	-	1.0	0.94			
WDIM HALR	-	0.97					



PHOTOMETRICS - NT3SQWW

Tested in accordance to IESNA LM79

INIT3SQ D 12LM 30K 80CRI 25D EZ1 MVOLT NT3SQWW CD, input watts: 12.7, delivered lumens: 716, LPW: 56.4, S/MH: 0.68, test no.: 20-081-04



CP Summary		Zonal Lumen Summary			Coefficients of Utilization										Luminance (cd/sq.m)	
0°	90°	Zone	Lumens	% Fixture	pf	80%		20%		70%		50%		Average Luminance		
					pc	50%	30%	10%	50%	30%	10%	50%	30%	10%		
0°	786	0° - 30°	437	61%	0	119	119	119	116	116	111	111	111	111	45°	9,355
5°	783	0° - 40°	583	82%	1	110	107	104	107	105	103	103	101	99	55°	7,903
15°	579	0° - 60°	691	97%	2	101	96	93	99	95	91	96	92	89	65°	10,691
25°	302	0° - 90°	716	100%	3	93	88	83	92	87	82	89	85	81	75°	16,145
35°	106				4	86	80	75	85	79	75	83	78	74	85°	6,607
45°	45				5	80	74	69	79	73	69	77	72	68		
55°	31				6	75	68	63	74	68	63	72	67	63		
65°	31				7	70	63	59	69	63	58	68	62	58		
75°	28				8	65	59	55	65	59	54	64	58	54		
85°	4				9	62	55	51	61	55	51	60	54	51		
90°	0				10	58	52	48	58	52	48	57	51	47		

FOOTCANDLES ON WALL FROM MULTIPLE FIXTURES

Fixture Distance to Wall		24"								
Fixture Centers (spacing)		24"			30"			36"		
DISTANCE FROM CEILING	1'	8	7	8	7	6	7	7	5	7
	2'	7	7	7	6	6	6	5	5	5
	3'	10	10	10	8	8	8	7	7	7
	4'	13	13	13	11	11	11	9	9	9
	5'	13	13	13	11	11	11	9	9	9
	6'	11	11	11	10	10	10	8	8	8
	7'	9	9	9	8	8	8	7	7	7
	8'	7	7	7	6	7	6	6	6	6
	9'	6	6	6	5	5	5	5	5	5
	10'	5	5	5	4	4	4	4	4	4

Performance listed at 3000K | 80CRI

LUMEN | CBCP MULTIPLIERS

CCT	80+ CRI	90+ CRI
2700K	0.96	0.83
3000K	1.00	0.86
3500K	1.03	0.89
4000K	1.05	-
WDIM HALR	-	0.97

04LM	08LM	10LM	12LM	15LM
0.38	0.66	0.85	1.00	1.24

REFLECTOR FINISH			
CD	W	BD	WTD
1.00	1.01	0.96	0.99

*Refer to website for additional photometry (alternate trims, CCT/CRI, lumen packages)



DIMMER COMPATIBILITY

Phase Dimming (FPC Driver)

Incandescent, Magnetic Low Voltage and Electronic Low Voltage Dimming

- Dimming range of 100% down to as low as 1% a minimum load of one fixture
- Dimming range and maximum rated load vary depending on dimmer type and model. See maximum load calculations below to identify max number of luminaires per dimmer.

Incandescent (INC) and Magnetic Low Voltage (MLV)

Example: Fixture Rating = 13W
Dimmer Rating = 600W
Equivalent Incandescent Load (EIL) = 50%
(600/13W) X 0.5 = 23 Fixtures per Dimmer

Electronic Low Voltage (ELV)

Example: Fixture Rating = 13W
Dimmer Rating = 600W
Equivalent Incandescent Load (EIL) = 75%
(600/13W) X 0.75 = 34 Fixtures per Dimmer

INCANDESCENT, MLV, ELV WALL DIMMERS

Manf.	Product Family	Series	Type	Min Light (%)
Lutron	Glyder	GLV*	MLV	3
Leviton	SureSlide	6633*	INC	2
Lutron	Diva	DVLV	MLV	6
Lutron	Diva	DV*	INC	2
Lutron	Skylark	SLV*	MLV	4
Leviton	IllumaTech	IPL016-10Z*	INC	4
Leviton	SureSlide	6613*	MLV	3
Lutron	Diva	DVCL	INC	2
Insteon	Keypad Dimmer	2334-232*	INC	2
Insteon	Dimmer Switch	2477D*	INC	2
Control4	Forward Phase Dimmer	C4-FPD 120*	INC	2
Lutron	Nova	NTELV*	ELV	6
Lutron	Diva	DVELV	ELV	3
Lutron	Maestro	MAELV*	ELV	6
Leviton	Vizia	VPE06-1LX	ELV	3
Leviton	IllumaTech	IPE04*	ELV	6
Lutron	RadioRA2	RRD-6NA	PHA	2
Control4	Adaptive Phase Dimmer	C4-APD 120*	PHA	2

INTEGRATED CONTROL SYSTEMS

Manf.	Product Family	Series	Type	Min Light (%)
Lutron	LP	LP-RPM-4U*	INC	6
Lutron	LP	LP-RPM-4A	PHA	2
Lutron	GrafikEye QS	QSGRJ-3P*	PHA	2
Lutron	GrafikEye QS	PHPM-PA-120	PHA	2
Lutron	HomeWorks QS	PHPM-PA-120	PHA	2
Lutron	HomeWorks QS	HW-RPM-4A	PHA	2
Acuity	nLight nSP5PCD ELV	nSP5PCD*	ELV	2
Insteon	Micro Module Dimmer	2442-222*	INC	2
Control4	8 Ch Dimmer	C4-DIN-8DIM-E	PHA	2

0-10V Dimming (EZ1/GZ1 Driver)

WALL DIMMERS

Manf.	Product Family	Series	Type	Min Light (%)
Lutron	Nova T	NTFTV* +	0-10V	1
Lutron	Nova T	NTSTV-DV*	0-10V	1
Lutron	Nova T	NFTV* +	0-10V	1
ACUITY	SensorSwitch	WSX D WH*	0-10V	1

*: recommended dimmers
+: require a separate relay module to turn fixture on/off

INTEGRATED CONTROL SYSTEMS

Manf.	Product Family	Series	Type	Min Light (%)
Lutron	Energi Tripak	RMJ-5T-DV-B*	0-10V	1
Wattstopper	DLM	LMRC-211*	0-10V	1
Crestron	GreenLight	DIN-4DIMFLV4*	0-10V	1
Leviton	IllumaTech	IP710-DLX	0-10V	1
Lutron	GrafikEyeQS	GRX-TVI*	0-10V	1
Lutron	GrafikEyeQS	GRX-TVI*	0-10V	1
Lutron	HomeworksQS	GRX-TVM2*	0-10V	1