



# BLACK BODY DIMMING & TUNABLE WHITE 700/1000 LUMEN DOWNLIGHT LED

## PRODUCT DESCRIPTION

Recessed downlight LED luminaire features both Black Body Dimming and Tunable White technology in a single fixture. In Black Body Dimming mode, the luminaire duplicates halogen dimming, creating a natural warm glow as the CCT shifts from 3000K to less than 1800K when dimmed. In Tunable White mode, the CCT can be adjusted anywhere along the Planckian locus from 2000K through 4350K independent of dimming. Aculux Black Body Dimming and Tunable White luminaires feature a sealed Air-Loc® housing and is available in both IC and Non-IC rated configurations.

## PRODUCT SPECIFICATIONS

**LED Light Engine** With single dimmer connected, the light engine duplicates halogen, with the CCT shifting from 3000K at 100% to 1800K when dimmed to 1% • Connect a second dimmer to engage Tunable White mode, featuring independent dimming and CCT tuning from 2000K through 4350K • Superb color consistency within 2 SDCM of the Planckian locus over CCT range • Accurate color rendition with 90 CRI at 3000K, and 85 CRI/70 R9 throughout CCT range.

**Dimming and CCT Control** Black Body Dimming and CCT Tuning are compatible with most 0-10V protocol dimmers • IC rated housings are rated for 120-277V input • For Non-IC housings, specify 120V or 277V. Refer to installation instructions for detailed wiring schematics.

**Modular Optics** Field interchangeable optics available with 21° Very Narrow Flood, 27° Narrow Flood, or 36° Flood distributions • 50° distribution is available when AF3-50DEG accessory lens is used with 27° Narrow Flood optic • Patent pending auto-adjusting optic holder maximizes luminaire efficiency by maintaining optimal LED optic position relative to trim • Accommodates up to three (3) beam control lenses and/or filters.

**Reflector** .040" aluminum parabolic reflector in clear, gold, black, haze, or wheat haze Alzak finish provides 50° lamp and lamp image cut-off.

**Trims Style** Trim Ring, Self Flanged and Flush Mount reflectors available • Trim ring features beveled knife edge for clean ceiling interface • Self Flanged reflectors with polished or optional white painted flange • For flush mount installations in drywall ceilings use the FMA4 flush mount adapter • For flush mount installations in wood, stone, or tile ceilings the FMA4-SC\*\*\* must be used (specify ceiling thickness and adapter finish).

**Life** Rated for 50,000 hrs at 70% lumen maintenance.

**Warranty** 5 years from date of purchase on LED components • Standard Juno Lighting Group product guarantee terms and conditions apply.

**Codes/Labels** UL and cUL listed for through branch wiring, damp locations • Meets energy code Air Leakage requirements per ASTM E283 • Union made.

**Mounting** Available with either Patented (US Patent 8,038,113) Pro-VI™ bar hanger system, permitting quick placement of housing with 24" on-center joists or suspended ceilings, or with vertically adjustable mounting brackets (butterfly brackets). Specify mounting style when ordering.

**Junction Box** IC housings are rated for 4 No. 12 AWG 90°C through branch circuit conductors. • Non-IC housings are rated for 8 No. 12 AWG 90°C through branch circuit conductors. • Includes (5) 1/2", (1) 3/4", and (4) Non-metallic sheathed cable knock-outs. • Push-in electrical connectors for field connections.

**Housing/Mounting Frame** Housing painted black for visually dark interior • V-Notch in plaster frame and Patented (US Patent 8,277,090) Tru-Line™ Platform featuring +/- 1/2" translation aids fixture alignment after installation, prior to drywall.

**Ceiling Thickness** 1/2" - 7/8" ceiling standard • For thicker ceilings, order CTA4N-125 (7/8"-1 1/4"), CTA4N-163 (1 1/4"-1 5/8") or CTA4N-200 (1 5/8"-2") • CTA4N not required for wood, stone, or tile flush mount applications.

## ELECTRICAL DATA


Housing	IC(9)43T		IC49T		TC(9)49T	
Voltage	120	277	120	277	120	277
Input Power (W)	13.0	14.3	20.5	21.6	22.5	23.6
Input Current (A)	0.11	0.06	0.17	0.09	0.18	0.09
Frequency	50/60Hz		50/60Hz		50/60Hz	
Power Factor	0.99	0.92	0.99	0.92	0.99	0.92

3-1/4" HYPERBOLIC DOWNLIGHT CONE


**IC(9)43T-4017N, IC49T-4017N,  
TC(9)49T-4017N**

Type	Cat. No.
_____	_____
Project:	_____
Notes:	_____


## DIMENSIONS




**IC943T,  
TC949T**



**IC43T,  
TC49T**

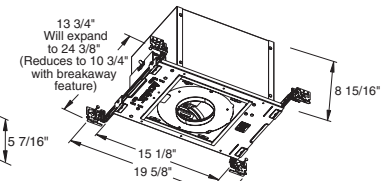


**IC49T**

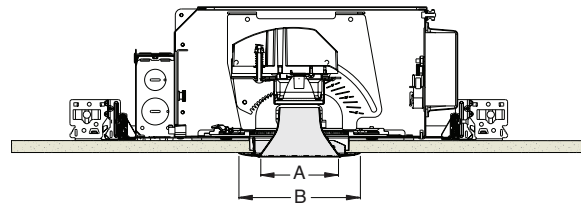

4 1/4" CEILING CUTOUT  
(REFER TO INSTRUCTION SHEET FOR  
FLUSH MOUNT CEILING CUTOUT)

	A	B
Trim Ring	3 1/4"	5"
Self Flanged	3 3/8"	4 5/8"
Flush Mount	3 3/8"	3 7/8"

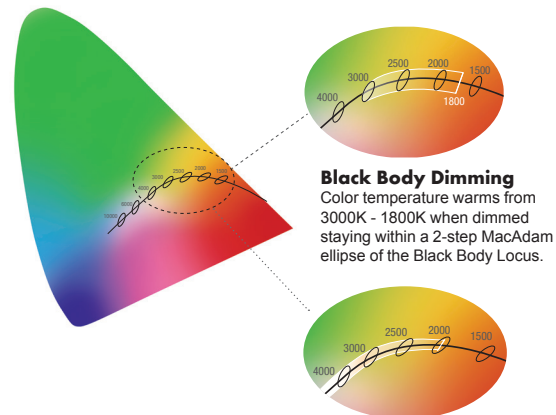

**Black Body Dimming**  
Color temperature warms from 3000K - 1800K when dimmed staying within a 2-step MacAdam ellipse of the Black Body Locus.

**Tunable White**  
Color temperature can be tuned from 4350K - 2000K while staying within a 2-step MacAdam ellipse of the Black Body Locus.

# BLACK BODY DIMMING & TUNABLE WHITE 700/1000 LUMEN DOWNLIGHT LED

3-1/4" HYPERBOLIC DOWNLIGHT CONE

**IC(9)43T-4017N, IC49T-4017N,  
TC(9)49T-4017N**

## Ordering Information




Housing, trim and accessories each ordered separately

Example: **TC949T-W-N-U1**

Housing	Tunable White Range	Beam Spread	Voltage/Dimming <sup>1</sup>	Options
<input type="text"/>	<b>W</b> <input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
<b>IC43T</b> 700 Lumen, Bar Hangers (IC)	<b>W</b> 4350K - 2000K	<b>V</b> 21° Very Narrow Flood	<b>U</b> 120-277V, 0-10V Dimming	<b>CP*</b> Chicago Plenum
<b>IC943T</b> 700 Lumen, Butterfly Brackets (IC)		<b>N</b> 27° Narrow Flood	<b>U1</b> 120V, 0-10V Dimming	
<b>IC49T</b> 1000 Lumen, Bar Hangers (IC)		<b>F</b> 36° Flood	<b>U2</b> 277V, 0-10V Dimming	
<b>TC49T</b> 1000 Lumen, Bar Hangers (Non-IC)				
<b>TC949T</b> 1000 Lumen, Butterfly Brackets (Non-IC)				

\*Not available on IC49T Housing.  
<sup>1</sup> IC is Universal voltage. Specify voltage for Non-IC products.

Example: **4017NB-WH**

Trim/Description			
			
Trim Ring <sup>1</sup>	Self Flanged <sup>2</sup>	Flush Mount <sup>3</sup>	Description
<b>4017NB-WH</b>	<b>4017NB-SF</b>	<b>4017NB-FM</b>	Black Cone
<b>4017NC-WH</b>	<b>4017NC-SF</b>	<b>4017NC-FM</b>	Clear Cone
<b>4017NHZ-WH</b>	<b>4017NHZ-SF</b>	<b>4017NHZ-FM</b>	Haze Cone
<b>4017NW-WH</b>	<b>4017NW-SF</b>	<b>4017NW-FM</b>	White Cone
<b>4017NWHZ-WH</b>	<b>4017NWHZ-SF</b>	<b>4017NWHZ-FM</b>	Wheat Haze Cone

<sup>1</sup>Trim Ring Finish: WH - White.

<sup>2</sup>For self flanged reflector with optional white painted flange, replace "-SF" suffix with "-SFWH".

<sup>3</sup>Flush Mount trims must be used with Flush Mount Adapter, ordered separately.

Product specifications subject to change without notice.

## Flush Mount Adapters

Cat. #	Description
<b>FMA4</b>	Drywall Ceiling Adapter
<b>FMA4-SC087-WH</b>	Wood, Stone, Tile, 1/2"-7/8" Thick Ceiling, Adapter, White
<b>FMA4-SC087-BL</b>	Wood, Stone, Tile, 1/2"-7/8" Thick Ceiling, Adapter, Black
<b>FMA4-SC125-WH</b>	Wood, Stone, Tile, 7/8"-1 1/4" Thick Ceiling, Adapter, White
<b>FMA4-SC125-BL</b>	Wood, Stone, Tile, 7/8"-1 1/4" Thick Ceiling, Adapter, Black
<b>FMA4-SC163-WH</b>	Wood, Stone, Tile, 1 1/4"-1 5/8" Thick Ceiling, Adapter, White
<b>FMA4-SC163-BL</b>	Wood, Stone, Tile, 1 1/4"-1 5/8" Thick Ceiling, Adapter, Black

## Optical Accessories

Cat. #	Description	Cat. #	Description
<b>TIR-TW-V</b>	21° Very Narrow Flood Optic	<b>T7403</b>	Med. Green Dichroic Lens
<b>TIR-TW-N</b>	27° Narrow Flood Optic	<b>T7404</b>	Med. Blue Dichroic Lens
<b>TIR-TW-F</b>	36° Flood Optic	<b>T7405</b>	Yellow Dichroic Lens
<b>AF3-50DEG</b>	50° Optic Film (Use with 27° Optic)	<b>T7406</b>	Magenta Dichroic Lens
<b>T741</b>	Med. Pink Color Filter	<b>T7411</b>	Blue Green Dichroic Lens
<b>T742</b>	Warm Red Color Filter	<b>T7416</b>	Daylight Blue Correction Lens
<b>T743</b>	Daylight Blue Color Filter	<b>T7420</b>	Diffuse Spread Lens
<b>T744</b>	Med. Blue Color Filter	<b>T7422</b>	UV Filter Lens
<b>T745</b>	Med. Amber Color Filter	<b>T7477</b>	Prismatic Lens
<b>T746</b>	Med. Green Color Filter	<b>T7478</b>	Linear Spread Lens
<b>T7401</b>	Red Dichroic Lens	<b>T7459BL</b>	Hexcell Louver

## Misc. Accessories


Cat. #	Description
<b>CTA4N-125</b>	1 1/4" Thick Ceiling Adapter
<b>CTA4N-163</b>	1 5/8" Thick Ceiling Adapter
<b>CTA4N-200</b>	2" Thick Ceiling Adapter
<b>HB-1</b>	(2) Real Nail 3 Bar Hangers
<b>HB-26</b>	(2) 26" C-Channel Bar Hangers
<b>HB-50</b>	(2) 50" C-Channel Bar Hangers
<b>LB-27</b>	(2) 27" Linear Bar Hangers
<b>EMI-20</b>	20W Emergency Lighting Inverter

To order, specify catalog number.



**PHOTOMETRIC REPORT**

**Test Report #:** PT10142907R  
**Catalog No:** IC49T-W-F-U  
 with 4017NHZ-WH trim  
**Luminaire Spacing Criterion:** 0.54  
**Luminaire LPW:** 45



**CANDLEPOWER DISTRIBUTION (Candelas)**

Degrees	Candelas
Vertical	0°
0	2487
5	2311
15	1385
25	493
35	90
45	29
55	6
65	0
75	0
85	0
90	0

**AVERAGE INITIAL FOOTCANDLES**

Multiple Units (Square Array, 60"x60" room)  
 Ceiling 80% Wall 50% Floor 20%

Spacing	RCR1	RCR3	RCR5
4.0'	64	57	52
5.0'	41	37	33
6.0'	29	26	23
7.0'	23	21	19
8.0'	18	16	15
9.0'	14	13	11
10.0'	10	9	8

**INITIAL FOOTCANDLES**

(One Unit, 20.5W, 32.7° Beam)


Distance to Illuminated Plane (Feet)	Footcandles Beam Center	Beam Diameter
4	155.4	2.3'
6	69.1	3.5'
8	38.9	4.7'
10	24.9	5.9'

**LUMINANCE (Average cd/m²)**

Degrees	Average Luminance
45	7829
55	1885
65	44
75	0
85	0

**PHOTOMETRIC REPORT**

**Test Report #:** PT10142904R  
**Catalog No:** IC49T-W-N-U  
 with 4017NHZ-WH trim  
**Luminaire Spacing Criterion:** 0.46  
**Luminaire LPW:** 48



**CANDLEPOWER DISTRIBUTION (Candelas)**

Degrees	Candelas
Vertical	0°
0	3719
5	3413
15	1508
25	378
35	68
45	29
55	5
65	0
75	0
85	0
90	0

**AVERAGE INITIAL FOOTCANDLES**

Multiple Units (Square Array, 60"x60" room)  
 Ceiling 80% Wall 50% Floor 20%

Spacing	RCR1	RCR3	RCR5
4.0'	69	62	57
5.0'	44	40	37
6.0'	31	28	25
7.0'	25	22	21
8.0'	20	18	16
9.0'	15	14	12
10.0'	11	10	9

**INITIAL FOOTCANDLES**

(One Unit, 20.5W, 26.9° Beam)


Distance to Illuminated Plane (Feet)	Footcandles Beam Center	Beam Diameter
6	103.3	2.9'
8	58.1	3.8'
10	37.2	4.8'
12	25.8	5.7'

**LUMINANCE (Average cd/m²)**

Degrees	Average Luminance
45	7596
55	1790
65	44
75	0
85	0

**PHOTOMETRIC REPORT**

**Test Report #:** PT10142906R  
**Catalog No:** IC49T-W-V-U  
 with 4017NHZ-WH trim  
**Luminaire Spacing Criterion:** 0.38  
**Luminaire LPW:** 36



**CANDLEPOWER DISTRIBUTION (Candelas)**

Degrees	Candelas
Vertical	0°
0	3109
5	2668
15	900
25	277
35	103
45	55
55	11
65	0
75	0
85	0
90	0

**AVERAGE INITIAL FOOTCANDLES**

Multiple Units (Square Array, 60"x60" room)  
 Ceiling 80% Wall 50% Floor 20%

Spacing	RCR1	RCR3	RCR5
4.0'	52	47	42
5.0'	33	30	27
6.0'	23	21	19
7.0'	19	17	15
8.0'	15	13	12
9.0'	11	10	9
10.0'	8	7	7

**INITIAL FOOTCANDLES**

(One Unit, 20.5W, 22.2° Beam)


Distance to Illuminated Plane (Feet)	Footcandles Beam Center	Beam Diameter
6	86.4	2.4'
8	48.6	3.1'
10	31.1	3.9'
12	21.6	4.7'

**LUMINANCE (Average cd/m²)**

Degrees	Average Luminance
45	14647
55	3643
65	87
75	0
85	0

**PHOTOMETRIC REPORT**

**Test Report #:** PT10142905R  
**Catalog No:** IC49T-W-N-U + AF3-50DEG  
 with 4017NHZ-WH trim  
**Luminaire Spacing Criterion:** 0.92  
**Luminaire LPW:** 40



**CANDLEPOWER DISTRIBUTION (Candelas)**

Degrees	Candelas
Vertical	0°
0	835
5	823
15	723
25	548
35	313
45	103
55	21
65	0
75	0
85	0
90	0

**AVERAGE INITIAL FOOTCANDLES**

Multiple Units (Square Array, 60"x60" room)  
 Ceiling 80% Wall 50% Floor 20%

Spacing	RCR1	RCR3	RCR5
4.0'	57	49	42
5.0'	36	31	27
6.0'	25	22	19
7.0'	20	18	15
8.0'	16	14	12
9.0'	12	11	9
10.0'	9	8	7

**INITIAL FOOTCANDLES**

(One Unit, 20.5W, 62.2° Beam)

Distance to Illuminated Plane (Feet)	Footcandles Beam Center	Beam Diameter
4	52.2	4.8'
6	23.2	7.2'
8	13.0	9.7'
10	8.4	12.1'

**LUMINANCE (Average cd/m²)**

Degrees	Average Luminance
45	27350
55	6967
65	130
75	71
85	0

**Fc/Lumen Multipliers:** IC(9)43T - 0.70, IC49T - 1.00, TC(9)49T - 1.00

Fixtures tested to IES recommended standard for solid state lighting per LM-79-08. Photometric performance on a single unit represents a baseline of performance for the fixture. Results may vary in the field. Photometry is at 3000K CCT.

1300 S. Wolf Road • Des Plaines, IL 60018 • Phone (847) 827-9880 • Fax (847) 827-2925

220 Chrysler Drive • Brampton, Ontario • Canada L6S 6B6 • Phone (905) 792-7335 • Fax (905) 792-0064

Visit us at [www.junolightinggroup.com](http://www.junolightinggroup.com)

Printed in U.S.A. ©2014 Juno Lighting, LLC.

