



2" LED RECESSED ADJUSTABLE 700 & 1000 LUMEN

1-3/4" LENSED PINHOLE

REMODEL

TC207LAR, TC210LAR
with 2311 Trim



PRODUCT DESCRIPTION

Recessed LED adjustable luminaire with 1-3/4" lensed pinhole aperture delivers up to 760 lumens and is available with optical distributions approximating that of MR16 halogen lamps. Fixture has 50° visual cut-off for low aperture brightness. Low profile remodel housing is non-IC rated for use in non-insulated areas or where insulation is spaced at least 3" from housing.

PRODUCT SPECIFICATIONS

LED Light Engine Consistent fixture to fixture color consistency within a 2-step MacAdam ellipse • 2700K, 3000K, 3500K, or 4000K color temperatures are available with 80 CRI minimum • 2700K and 3000K are also available with 90 CRI minimum.

Modular Optics Available with field interchangeable optics in 18° Spot, 24° Narrow Flood, 35° Flood, and 45° wide flood distributions.

Adjustability Patent pending Acu-Aim™ precision geared hot-aiming achieves 365° rotation, 40° tilt with any ceiling thickness from 1/2" to 1" • Acu-Aim™ translates light engine forward as it is aimed off nadir, ensuring maximum light and low brightness • Black aiming mechanism preserves dark aperture.

Reflector Black reflector shields the interior of the housing.

Trims Style Self Flanged and Flush Mount styles are available
• For flush mount installations in drywall ceilings, specify the FMA2R adapter.

LED Driver Choice of two drivers to accommodate voltages from 120-277 volts AC at 50/60Hz • Dedicated 120V (-1) driver is dimmable with most incandescent, magnetic low voltage, and electronic low voltage dimmers • Universal Voltage (-U) driver is dimmable with most 0-10V protocol dimmers • For a list of compatible dimmers, refer to [ACLXLED2-DIM](#) • Power Factor > 0.9
• Field replaceable from above or below ceiling.

Life Rated for 50,000 hrs at 70% lumen maintenance.

Warranty 5 years from date of purchase on LED components
• Standard Juno Lighting Group product guarantee terms and conditions apply.

Codes/Labels UL and cUL listed for wet locations • ENERGY STAR® Qualified with spot, narrow flood and flood optics • Union made.


Remodel Installation Fixture installs from below the ceiling and secured to remodel ring.

Wiring Includes (2) 1/2" knockouts equipped with pryout slots and are compatible with flexible electrical supply only • Supplied with quick connect electrical connectors.


Ceiling Thickness 1/2" – 1 1/2" ceiling standard.

Type	Cat. No.
_____	_____
Project: _____	
Notes: _____	

DIMENSIONS

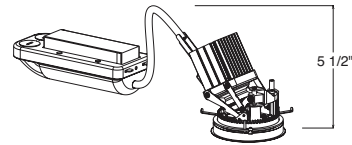

TC207LAR, TC210LAR

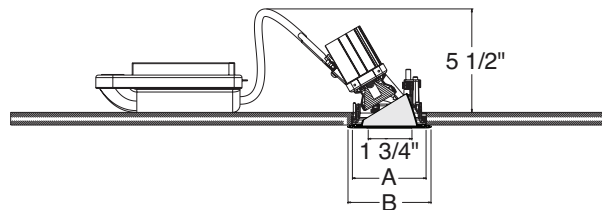

Trim Style	Cutout Size (A)	Trim O.D. (B)
Self Flanged Trims	2.953" (75mm)	3.20"
Flush Mount Trims (Drywall Ceiling)	3"	2.875"

Note: An accurate hole saw is recommended for best results.

ELECTRICAL DATA

Lumen Package	700			1000		
	Dedicated 120V (-1)	Universal Voltage (-U)		Dedicated 120V (-1)	Universal Voltage (-U)	
Voltage	120	120	277	120	120	277
Input Power	10.1	9.6	9.6	14.8	14.8	14.6
Input Current	0.09	0.08	0.04	0.12	0.12	0.06
Frequency	50/60Hz	50/60Hz		50/60Hz	50/60Hz	
Power Factor	0.99	0.99	0.93	0.99	0.99	0.95

2" LED RECESSED ADJUSTABLE 700 & 1000 LUMEN

1-3/4" LENSED PINHOLE


REMODEL

**TC207LAR, TC210LAR
with 2311 Trim**



Ordering Information Housing, trim and accessories each ordered separately

Example: **TC207LAR-830-N-1**

Series	CRI/CCT	Optic	Driver
TC207LAR 700 lm Adjustable, Non-IC	827 80 CRI, 2700K	S 18° Spot	1 120V, Phase Dimming
TC210LAR 1000 lm Adjustable, Non-IC	830 80 CRI, 3000K	N 24° Narrow Flood	U 120-277V, 0-10V Dimming
	835 80 CRI, 3500K	F 35° Flood	
	840 80 CRI, 4000K	W 45° Wide Flood	
	927 90 CRI, 2700K		
	930 90 CRI, 3000K		

	Construction:	Type Non-IC
	CCT/CRI:	827, 830, 835, 840
	Optic:	S, N, F
	Trim Finish:	BHZ-BL, BHZ-WH

Example: **2311BHZ-WH-SF**

Trim/Description		
		
Self Flanged	Flush Mount¹	Description
2311BHZ-BL-SF	2311BHZ-BL-FM	Black Trim
2311BHZ-WH-SF	2311BHZ-WH-FM	White Trim

¹Flush Mount trims must be used with Flush Mount Adapter in drywall ceilings, ordered separately.

Product specifications subject to change without notice.

Accessories

Cat. #	Description
FMA2R	Remodel Flush Mount Adapter for drywall ceilings
TIR-ACLX2-SP	18° Spot Optic
TIR-ACLX2-NFL	24° Narrow Flood Optic
TIR-ACLX2-FL	35° Flood Optic
TIR-ACLX2-WFL	45° Wide Flood Optic
AF2-SPREAD	35mm Linear Spread Optic Film
AF2-DIFFUSION	35mm Diffusion Optic Film
EMI-20	20W Emergency Lighting Inverter



2" LED RECESSED ADJUSTABLE 700 & 1000 LUMEN

1-3/4" LENSED PINHOLE


REMODEL

**TC207LAR, TC210LAR
with 2311 Trim**

SPOT PHOTOMETRIC REPORT

Test Report: PT10142102R
Catalog No: IC/TC210LAR-830-S-1
(Aim at 30°)
with 2311BHZ trim


Watts: 14.8
Lumens: 738
Luminaire LPW: 50



NARROW FLOOD PHOTOMETRIC REPORT

Test Report: PT10142104R
Catalog No: IC/TC210LAR-830-N-1
(Aim at 30°)
with 2311BHZ trim


Watts: 14.8
Lumens: 691
Luminaire LPW: 47



FLOOD PHOTOMETRIC REPORT

Test Report: PT10142105R
Catalog No: IC/TC210LAR-830-F-1
(Aim at 30°)
with 2311BHZ trim


Watts: 14.8
Lumens: 760
Luminaire LPW: 51



WIDE FLOOD PHOTOMETRIC REPORT



Test Report: PT10142107R
Catalog No: IC/TC210LAR-830-W-1
(Aim at 30°)
with 2311BHZ trim

Watts: 14.8
Lumens: 631
Luminaire LPW: 43

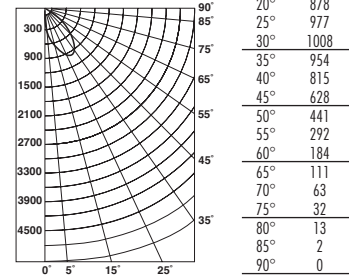



LUMEN OUTPUT MULTIPLIERS

Color Temperature	CRI	Multiplier
2700K	80	0.93
3000K	80	1.00
3500K	80	1.02
4000K	80	1.06
2700K	90	0.71
3000K	90	0.77



CBCP • Centerbeam candlepower
FC • Footcandles at beam center (aim point)

In vertical aiming applications, aim point (X) is determined by dividing distance from the wall (D) by the tangent of the desired aim angle (A) (0.5774 for 30°, 1.0 for 45°).



Beam Type	Beam Spread	CBCP	0°			30°			30°			40°						
			MH	FC	L	W	FC	L	W	D	FC	X	L	W	FC	X	L	W
SPT	18°	2929	4	183	1.8	1.8	119	2.4	2.0	2	92	3.5	4.1	1.8	194	2.4	2.3	1.4
			6	81	2.6	2.6	53	3.6	3.0	3	41	5.2	6.2	2.6	86	3.6	3.4	2.1
			8	46	3.5	3.5	30	4.8	4.1	4	23	6.9	8.2	3.5	49	4.8	4.6	2.7
			10	29	4.4	4.4	19	6.0	5.1	5	15	8.7	10.3	4.4	31	6.0	5.7	3.4
			12	20	5.3	5.3	13	7.2	6.1	6	10	10.4	12.3	5.3	22	7.2	6.9	4.1
NFL	24°	2290	4	143	1.9	1.9	93	2.6	2.2	2	72	3.5	4.6	1.9	152	2.4	2.5	1.5
			6	64	2.9	2.9	41	3.9	3.3	3	32	5.2	7.0	2.9	68	3.6	3.8	2.2
			8	36	3.8	3.8	23	5.2	4.4	4	18	6.9	9.3	3.8	38	4.8	5.1	3.0
			10	23	4.8	4.8	15	6.5	5.5	5	11	8.7	11.6	4.8	24	6.0	6.3	3.7
FL	35°	1574	4	98	2.6	2.6	64	3.6	3.0	2	49	3.5	7.6	2.6	105	2.4	3.7	2.0
			6	44	3.9	3.9	28	5.4	4.5	3	22	5.2	11.4	3.9	46	3.6	5.6	3.0
			8	25	5.2	5.2	16	7.2	6.0	4	12	6.9	15.2	5.2	26	4.8	7.4	4.0
			10	16	6.5	6.5	10	9.0	7.5	5	8	8.7	19.0	6.5	17	6.0	9.3	5.1
WFL	45°	1008	4	63	2.9	2.9	41	4.1	3.4	2	32	3.5	9.7	2.9	67	2.4	4.3	2.3
			6	28	4.4	4.4	18	6.1	5.0	3	14	5.2	14.5	4.4	30	3.6	6.5	3.4
			8	16	5.8	5.8	10	8.1	6.7	4	8	6.9	19.3	5.8	17	4.8	8.7	4.5
			10	10	7.3	7.3	7	10.2	8.4	5	5	8.7	24.2	7.3	11	6.0	10.9	5.7
			12	7	8.7	8.7	5	12.2	10.1	6	4	10.4	29.0	8.7	7	7.2	13.0	6.8

