




**LJT**  
LED Troffer

**LAW**  
LED Wraparound

**LCS**  
LED Open Striplight

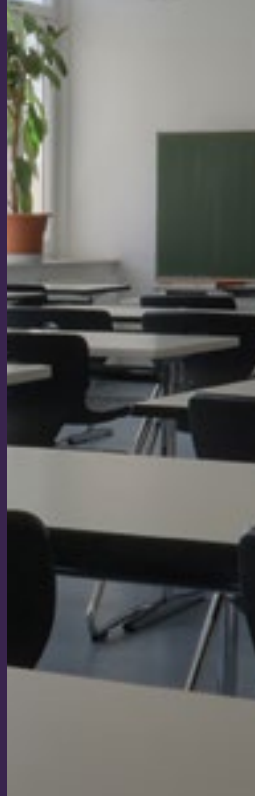

# LED luminaires

## Three LED products that have it all.

- Simple fluorescent replacement
- Readily available in stock
- Affordably priced
- Rebate friendly
- Long-life 60,000 hour LED at L80 lumen maintenance for reduced maintenance on site
- User friendly with access to LED boards and drivers from below
- Modular replacement of components
- Choice of LED color temperature
- Familiar shapes, sizes, and appearances for simplicity of use
- Controls compatible
- Integral battery pack option (1,400 lumens)

### LJT LED Troffer

- Replaces 1, 2, 3 and 4-lamp fluorescent troffers
- Up to 115 lumens per watt
- 1x4 Lumens: 2,485 up to 5,350
- 2x2 Lumens: 3,200 up to 4,550
- 2x4 Lumens: from 4,050 up to 8,775
- 3000K, 3500K, 4000K, 5000K
- Recessed, surface, or cable
- All models standard with IC rating
- DesignLights Consortium® (DLC) qualified; see [www.designlights.org](http://www.designlights.org)

### LAW LED Wraparound

- Replaces 1-lamp and 2-lamp fluorescent wraps
- Up to 109 lumens per watt
- 2' and 4'
- 2' lumens: from 2,600 up to 4,300
- 4' lumens: from 2,500 up to 5,600
- 3000K, 3500K, 4000K, 5000K
- Surface mount or suspended
- DesignLights Consortium® (DLC) qualified; see [www.designlights.org](http://www.designlights.org)

### LCS LED Striplight

- Replaces 1, 2, 3, 4, or 6-lamp fluorescent strips
- Up to 124 lumens per watt
- 2', 4' and 8'
- 2' Lumens: 3,000
- 4' Lumens: from 2,800 up to 11,200
- 8' lumens: from 5,600 up to 22,400
- 3000K, 3500K, 4000K, 5000K
- Surface mount or suspended
- Wire guard option
- DesignLights Consortium® (DLC) qualified; see [www.designlights.org](http://www.designlights.org)

# LJT ORDERING INFORMATION

LJT			-				-		U	-	
MODEL		COLOR TEMP	CEILING TYPE	SHIELDING				VOLTAGE	OPTIONS		
LJT LED Lensed Troffer		30 3000K 35 3500K 40 4000K 50 5000K	G Grid <sup>1</sup> SM Surface Mount CM Cable Mount <sup>2</sup>	A12 Pattern 12 Acrylic Lens A12125 Pattern 12 Acrylic Lens, 0.125" Nominal A12F Pattern 12 Frosted Acrylic Lens A12125F Pattern 12 Frosted Acrylic Lens, 0.125" Nominal A19 Pattern 19 Acrylic Lens, 0.156" Nominal A19F Pattern 19 Frosted Acrylic Lens .156"				U 120V-277V	C388 3-Wire Flex C488 4-Wire Flex C588 5-Wire Flex ELL14 Emergency Battery Pack, 1400 Lumens, Installed <sup>3,4</sup> GLR Fast Blow Fuse G1 Single Gasketing (Door to Housing) G2 Double Gasketing (G1 and Lens to Door) G3 Triple Gasketing (G2 and Housing to Ceiling) WIH wiHUBB <sup>5,6</sup> EOR End of Row (SM/CM only) <sup>7</sup> INT Intermediate (SM/CM only) <sup>7</sup> GRD Generator Transfer Device		
SIZE		LUMEN OUTPUT		PRODUCT AVAILABILITY — NOMINAL LUMENS							
14 1' x 4'		LW Low Watt		SIZE	LUMEN PACKAGE	LUMENS	WATTS	LPW	DRIVER		
22 2' x 2'		ML Medium Lumen		14	LW	2485-2605	26	97-102	E Fixed Output		
24 2' x 4'		HL High Lumen			ML	3605-3860	39	92-98	ESD Step Dimming		
		VL Very High Lumen			HL	4430-4755	51	88-94	ED 0-10V Dimming		
		XL Extra High Lumen (2x4 only)			VL	4920-5350	55	91-97			
See Product Availability table below.			DOOR		22	ML	3,200 - 3,450	35	92 - 99		
			FS White Flush Steel			HL	3,775 - 4,025	43	89 - 94		
			FA White Flush Aluminum			VL	4,250 - 4,550	51	85 - 91		
			For more door options contact factory.		24	LW	4,050 - 4,325	39	107 - 112		
						ML	4,600 - 4,900	45	103 - 109		
						HL	5,350 - 5,650	49	110 - 115		
						VL	6,825 - 7,200	68	102 - 107		
						XL	8,250 - 8,775	85	98 - 104		
					Based on A12 lens, range represents 3000K through 5000K. Lumens vary according to color temperatures and other factors. See specific photometric test(s).						
					ACCESSORIES (ORDER SEPARATELY)						
					FK14 1' x 2' Single Flange Kit						
					FK22 2' x 2' Single Flange Kit						
					FK24 2' x 4' Single Flange Kit						
					FKCR Flange Kit Row Adaptor (All Sizes)						
					CM48Y2SC3F-KIT 48" Cable Mount Kit for 2' Wide CM Ceiling Type, 3 Wire Feed Cord						
					CM48Y1SC3F-KIT 48" Cable Mount Kit for 1' Wide Cable Mount Fixtures, 3 Wire Feed Cord						

<sup>1</sup> For hard ceilings use flange kit accessory.

<sup>2</sup> Order hanger accessories separately.

<sup>3</sup> For compatibility with Dual-Lite LiteGear<sup>®</sup> inverters in lieu of EL Battery Pack, contact Hubbell Lighting Representative.

<sup>4</sup> Not available with 2x2 Surface or Cable Mount.

<sup>5</sup> Not available with Surface Mount ceiling types.

<sup>6</sup> In-Fixture Module Antenna adds 2" to overall fixture height at power feed location.

<sup>7</sup> Provides ends with wiring access for continuous row mounting.

Damp Label - standard. IC Rating - standard.