

LED



createchange

FEATURES

- Direct/indirect luminaire with popular metal perforated basket shielding
- 60,000 hour LEDs at L80 (up to 200,000 projected life) for reduced maintenance
- Four LED color choices and 80 CRI
- Eight lumen packages
- Multiple driver options to satisfy different applications
- LED modules and electrical accessible from below
- Precision optical design produces high efficiency in a high visual comfort architecturally styled direct/indirect distribution
- Optimized coating process and unique paint formulation provide exceptional reflectivity in a matte finish for a soft visual image and balanced basket and reflector illumination
- Completely recessed, provides a clean ceiling with uniform illumination at mounting heights as low as 8 feet
- QR code traceability
- Integral battery pack optional on most models
- Compatible with Dual-Lite inverters
- Recessed, surface or cable mount
- DesignLights Consortium® (DLC) qualified
- Five year warranty (Terms and Conditions apply)

PROJECT INFORMATION

Project Name _____

Type _____

Catalog No. _____

Date _____

CONSTRUCTION

Luminaire housing and end caps are die formed code gauge cold rolled steel. The sturdy reflector is stiffened with linear forms, profiled to a precision curve. Perforated basket with high transmission overlay for improved optical efficiency plus lamp obscuration. Basket and all reflective surfaces are finished after fabrication with unique formula high reflectivity matte white paint for soft, uniform indirect illumination. Thermoplastic light traps snap into the housing at both ends of the basket to prevent light leaks. Basket hinges down for easy access to center wireway.

INSTALLATION

An access plate is furnished with each luminaire for fast wiring access without the necessity to open the fixture or wireway.

CEILING COMPATIBILITY

Luminaire fits recessed exposed Grid ceilings (G); four integral NEC compliant T-bar clips are standard. Can be placed in Slot Grid (SG) style ceiling with regress 3/8" above ceiling plane. A Flange Kit (FK) accessory is available for recessed hard ceiling applications. Surface Mount (SM) option allows placement below ceiling plane. Cable Mount (CM) option allows suspension below ceiling plane.

CERTIFICATION

All luminaires are built to UL1598 and 2108 standards, and bear appropriate CSA labels. Damp location is standard. Emergency-equipped fixtures labeled UL 924 and Dry Location unless specified. Adheres to LM79, LM80, and TM21 industry standards. DesignLights Consortium® (DLC) qualified. Please refer to the DLC website for specific product qualifications at www.designlights.org.

IC RATING

IC label is standard for recessed products. Note that IC label is void on HL, VL, and XL if product is installed on site with through wiring.

WARRANTY

Five year warranty (Terms and Conditions apply).

ORDERING INFORMATION

EXAMPLE LSTE24-35MLG-MP0-ESDU

LSTE		24		-		-		MPO		-		-	
MODEL		COLOR TEMP		LUMEN OUTPUT		SHIELDING		CEILING TYPE		DRIVER		OPTIONS	
LSTE Stratus®LED Recessed Architectural		30 3000K 35 3500K 40 4000K 50 5000K		XW Extra Low Watt VW Very Low Watt MW Medium Low Watt LW Low Watt ML Medium Lumen HL High Lumen VL Very High Lumen XL Extra High Lumen		MPO Metal Perf w/ Overlay		G Grid Lay-in¹ SM Surface Mount CM Cable Suspended Mount²		E Fixed Output ESD Step Dimming³ ED 0-10V Dimming ED1 0-10V 1% Dimming LUTH Lutron H Series 1% Dimming³⁴ LUT5 Lutron 5 Series 5% Dimming³⁴		ELL14 Emergency Battery Pack Installed, 1400 Lumens³⁴ C388 3-Wire Flex C488 4-Wire Flex C588 5-Wire Flex GLR Fast Blow Fuse CP Chicago Plenum NYC NYC Compliant EOR End of Row (SM and CM only. Provides end wiring access for continuous row mounting.) INT Intermediate (SM and CM only. Provides ends with wiring access for continuous row mounting.)	
SIZE 24 2' x 4'													
VOLTAGE U 120V-277V 347 347V													
PRODUCT AVAILABILITY													
See Product Availability Table below.													

See Product Availability Table below.

PRODUCT AVAILABILITY				
SIZE	OUTPUT	LUMENS	WATTS	LPW
24	XW	2325-2525	24	98-106
24	VW	3275-3550	33	99-108
24	MW	3625-3950	37	98-107
24	LW	4200-4550	43	98-106
24	ML	4725-5125	50	95-103
24	HL	5525-6000	61	91-98
24	VL	7025-7650	76	92-100
24	XL	7900-8575	88	90-98

Nominal lumen range represents 3000K through 5000K.
Lumens vary according to color temperatures and other factors.
See specific photometric test(s).

2X4 DRIVER AVAILABILITY TABLE								
	XW	VW	MW	LW	ML	HL	VL	XL
E	X	X	X	X	X	X	X	X
ED	X	X	X	X	X	X	X	X
ED1	X	X	X	X	X	X	X	X
ESD			X	X	X	X	X	X
LUT5		X	X	X	X	X	X	
LUTH		X	X	X	X	X	X	

LUT5 and LUTH not available in 347V

ACCESSORIES (ORDER SEPARATELY)	
FK24	2' x 4' Single Flange Kit (Shipped separately)
CM48Y2SC3F-KIT	48" Cable Mount Kit for 2' wide Cable Mount fixtures, 3 Wire

¹ For drywall, order G with Flange Kit Accessory.

² Order hanger accessories separately

³ Not available in 347V

⁴ For compatibility with Dual-Lite LiteGear® inverters, contact Hubbell Lighting Representative

For questions about configuration options, contact Hubbell Representative.

LED / LSTE24

PHOTOMETRIC DATA

Test #16062 Test Date 3/31/2016

LUMINAIRE DATA

Luminaire	LSTE24-35LWG-MPO-EDU LSTE Stratus E-Series LED, Recessed Architectural 2x4 with Perforated Basket and Overlay
Ballast	XI054C150V054DNT1
Ballast Factor	1.00
Lamp	LED
Fixture Lumens	4285
Watts	43.20
Mounting	Recessed
Shielding Angle	0° = 90 90° = 90
Spacing Criterion	0° = 1.15 90° = 1.27
Luminous Opening in Feet	Length: 1.92 Width: 1.92 Height: 0.00


ZONAL LUMEN SUMMARY

Zone	Lumens	% Lamp	% Fixt.
0-30	1158	27.0	27.0
0-40	1880	43.9	43.9
0-60	3337	77.9	77.9
0-90	4285	100.0	100.0
0-180	4285	100.0	100.0

ENERGY DATA

Total Luminaire Efficiency	100.0%
Total Lumens per Watt	99
IESNA RP-1-2004 Compliance	Non-Compliant
Comparative Yearly Lighting Energy Cost per 1000 Lumens	\$2.40 based on 3000 hrs. and \$0.08 per KWH

INDOOR CANDELA PLOT

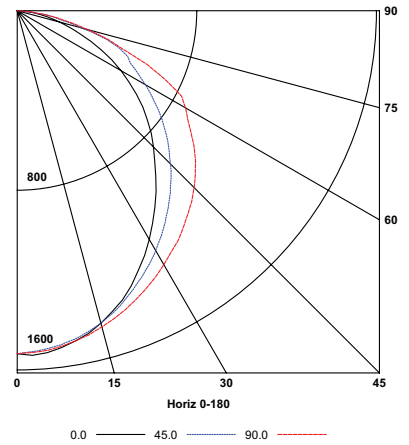

Test #16063 Test Date 3/31/2016

LUMINAIRE DATA

Luminaire	LSTE24-35MLG-MPO-EDU LSTE Stratus E-Series LED, Recessed Architectural 2x4 with Perforated Basket and Overlay
Ballast	XI054C150V054DNT1
Ballast Factor	1.00
Lamp	LED
Fixture Lumens	4818
Watts	49.60
Mounting	Recessed
Shielding Angle	0° = 90 90° = 90
Spacing Criterion	0° = 1.15 90° = 1.28
Luminous Opening in Feet	Length: 3.92 Width: 1.92 Height: 0.00


ZONAL LUMEN SUMMARY

Zone	Lumens	% Lamp	% Fixt.
0-30	1303	27.0	27.0
0-40	2116	43.9	43.9
0-60	3757	78.0	78.0
0-90	4818	100.0	100.0
0-180	4818	100.0	100.0

ENERGY DATA

Total Luminaire Efficiency	100.0%
Total Lumens per Watt	97
IESNA RP-1-2004 Compliance	Non-Compliant
Comparative Yearly Lighting Energy Cost per 1000 Lumens	\$2.50 based on 3000 hrs. and \$0.08 per KWH

INDOOR CANDELA PLOT

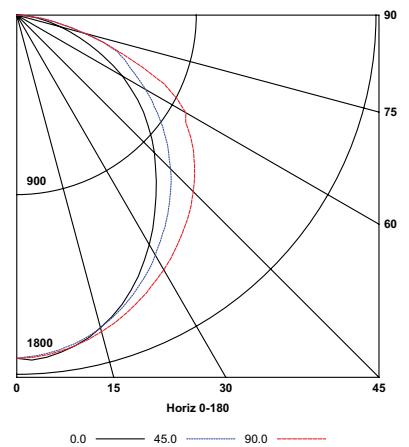

Test #16064 Test Date 3/31/2016

LUMINAIRE DATA

Luminaire	LSTE24-35HLG-MPO-EDU LSTE Stratus E-Series LED, Recessed Architectural 2x4 with Perforated Basket and Overlay
Ballast	XI040C110V054BPT1
Ballast Factor	1.00
Lamp	LED
Fixture Lumens	5630
Watts	61.40
Mounting	Recessed
Shielding Angle	0° = 90 90° = 90
Spacing Criterion	0° = 1.14 90° = 1.30
Luminous Opening in Feet	Length: 3.92 Width: 1.92 Height: 0.00


ZONAL LUMEN SUMMARY

Zone	Lumens	% Lamp	% Fixt.
0-30	1536	27.3	27.3
0-40	2498	44.4	44.4
0-60	4425	78.6	78.6
0-90	5630	100.0	100.0
0-180	5630	100.0	100.0


ENERGY DATA

Total Luminaire Efficiency	100.0%
Total Lumens per Watt	92
IESNA RP-1-2004 Compliance	Non-Compliant
Comparative Yearly Lighting Energy Cost per 1000 Lumens	\$2.61 based on 3000 hrs. and \$0.08 per KWH

INDOOR CANDELA PLOT

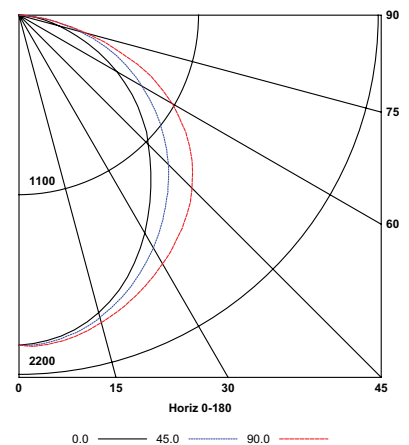

DIMENSIONAL DATA

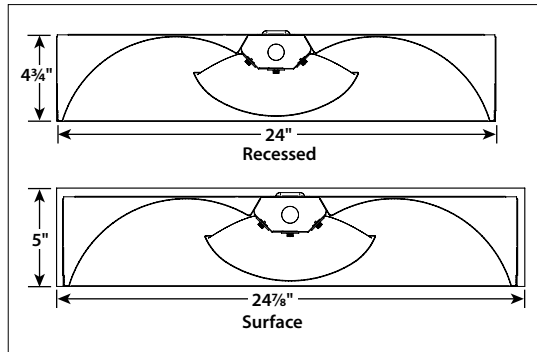


Top View

Surface Mount K.O. Dimensions

A: 7/8" K.O.

B: 2" x 3" Access (Cover Removed)



C: 2" x 3" Rectangular Knockout

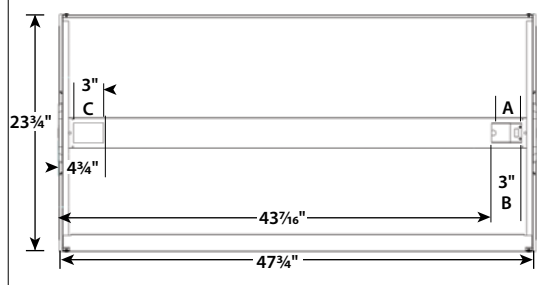

NOTE: All dimensions are in inches; dimensions and specifications are subject to change without notice. Please consult factory or check sample for verification.



CEILING COMPATIBILITY

Type G Side

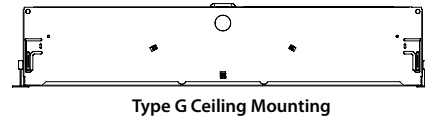


For lay-in installation in exposed grid ceilings. Maximum tee widths of 1" and maximum heights of 1 1/2" allowed.

Type SG Ceiling

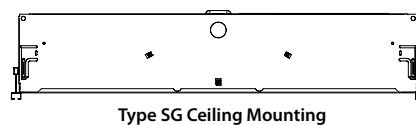

For 5/16" slot grid type ceilings. Luminaire will be regressed 3/8" horizontal surface of the tee.

FK Flange Kit



For hard ceiling applications, fixtures must be ordered with a flange kit that wires directly into the concealed ceiling opening for a clean finished appearance. For row configurations contact your local Columbia Representative.


Row cut out dimensions using FK24s & FKCR adapters:

Width 24 3/8", Length [48" x (# in row)] + 3/8".

Example: (48" x 2) + 3/8" = 96 3/8"

Flange kit cut out dimension for single FK24 only: 24 3/8" x 48 3/8"

DIMENSIONAL DATA - SURFACE OR CABLE MOUNT

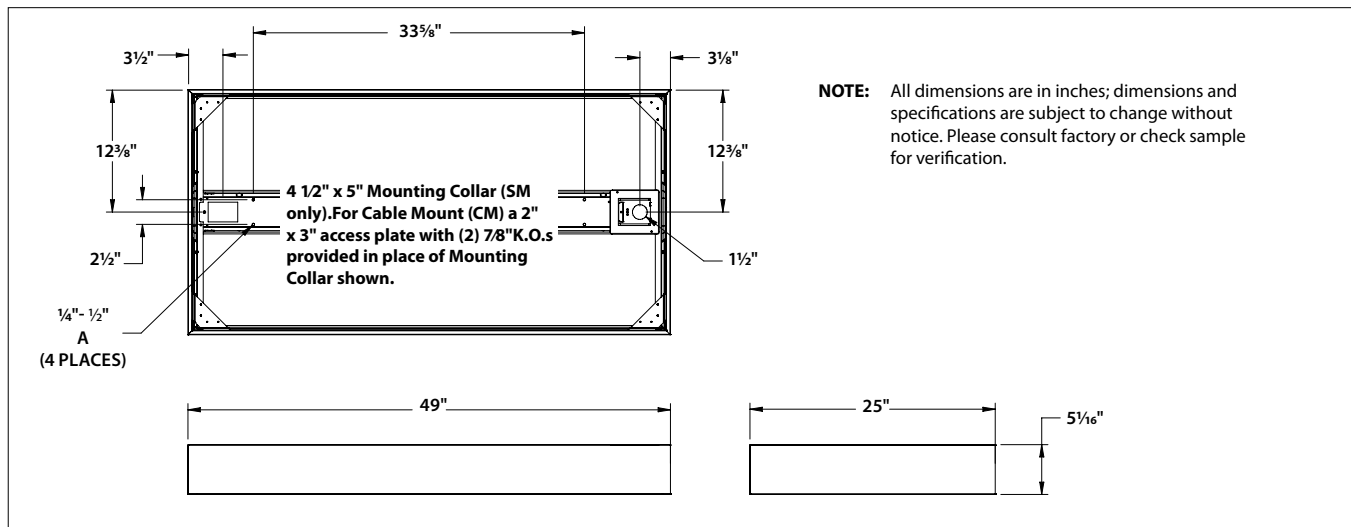

NOTE: All dimensions are in inches; dimensions and specifications are subject to change without notice. Please consult factory or check sample for verification.

SURFACE MOUNT

Order SM ceiling type. Mounting collar required for surface mounting. (4) Mounting knock outs, 1/4" to 1/2" provided as shown, marked "A".

CABLE MOUNT

Order CM ceiling type. Access plate supplied for cable mounting or suspension. Use CM48Y2C3F-KIT 48" cable mount kit. Includes 3 wire feed cord. For other wiring needs, contact Hubbell representative.