



Barbecue

BQ-01 Series Barbecue Lights: 12v/120v: Threaded Egg



Mounts :



Deck (-FD)



3" Clamp (-FC3)
5" Clamp (-FC5)



Quick Connect (-QC)



Weighted Base (-WB)



BQFD01L48SS

FIXTURE: 316 stainless steel housing

ARM: 12" 316 stainless steel rigid stem with 16" stainless steel flex arm on top. Clear polyolefin shrink cover protection on flex arm.

LENS: High impact clear tempered flat glass

O-RING: High temperature red silicone

12v SOCKET: High temperature ceramic GU5.3 bi-pin with 250°C silicone lead wires

12v LED SUPPLIED: 7w MR16 Super Saver LED (L48); 40,000 hours 36°, 550 lumens, 3000K

120v SOCKET: High temperature ceramic medium base with 250°C silicone lead wires

120v LED SUPPLIED: 7w, PAR16, medium base LED (L134), 40,000 hours, 36°, 550 lumens, 3000K

FINISH: Stainless Steel - brushed

ORDERING INFORMATION

CATALOG NO.	DESCRIPTION	KIT NEEDED
BQFD01L48SS	12v 316 Stainless Steel Flex Deck Mount BBQ Light	01, 02, 03
BQFC301L48SS	12v 316 Stainless Steel Flex 3" Clamp Mount BBQ Light	01, 02, 03
BQFC501L48SS	12v 316 Stainless Steel Flex 5" Clamp Mount BBQ Light	01, 02, 03
BQQC01L48SS	12v 316 Stainless Steel Quick Connect Mount BBQ Light	01, 03
BQFD01L134SS	120v 316 Stainless Steel Flex Deck Mount BBQ Light	04
BQFC301L134SS	120v 316 Stainless Steel Flex 3" Clamp Mount BBQ Light	Supplied
BQFC501L134SS	120v 316 Stainless Steel Flex 5" Clamp Mount BBQ Light	Supplied
BQWB01L134SS	120v 316 Stainless Steel Weighted Base BBQ Light	Supplied

Power Kits-See Page 5

CATALOG NO.	DESCRIPTION
BQFA01	15w Magnetic Plug In 12v Transformer, 120v Input
BQFA02	12v Battery w/ 10ft 18/2 Lead Wire & Battery Charger
BQFA03	FA05 Quick Connector & 20ft 18/2 Wire To Existing Voltage Systems -12v
BQFA04	9' Power Cord 18/3 SJTW & Plug - 120v



BQFD01L48SS

BQ-02 Series Barbecue Lights: 12v/120v: Angled Bullet



Mounts :



Deck (-FD)



3" Clamp (-FC3)
5" Clamp (-FC5)



Quick Connect (-QC)



Weighted Base (-WB)

BQFD02L48SS

FIXTURE: 316 stainless steel housing

ARM: 12" 316 stainless steel rigid stem with 16" stainless steel flex arm on top. Clear polyolefin shrink cover protection on flex arm.

LENS: High impact clear tempered flat glass

O-RING: High temperature red silicone

12v SOCKET: High temperature ceramic GU5.3 bi-pin with 250°C silicone lead wires

12v LED SUPPLIED: 7w MR16 Super Saver LED (L48); 40,000 hours, 36°, 550 lumens, 3000K

120v SOCKET: High temperature ceramic medium base with 250°C silicone lead wires

120v LED SUPPLIED: 7w, PAR16, medium base LED (L134), 40,000 hours, 36°, 550 lumens, 3000K

FINISH: Stainless Steel - brushed

ORDERING INFORMATION

CATALOG NO.	DESCRIPTION	KIT NEEDED
BQFD02L48SS	12v 316 Stainless Steel Flex Deck Mount BBQ Light	01,02,03
BQFC302L48SS	12v 316 Stainless Steel Flex 3" Clamp Mount BBQ Light	01,02,03
BQFC502L48SS	12v 316 Stainless Steel Flex 5" Clamp Mount BBQ Light	01,02,03
BQQC02L48SS	12v 316 Stainless Steel Quick Connect Mount BBQ Light	01,03
BQFD02L134SS	120v 316 Stainless Steel Flex Deck Mount BBQ Light	04
BQFC302L134SS	120v 316 Stainless Steel Flex 3" Clamp Mount BBQ Light	Supplied
BQFC502L134SS	120v 316 Stainless Steel Flex 5" Clamp Mount BBQ Light	Supplied
BQWB02L134SS	120v 316 Stainless Steel Weighted Base BBQ Light	Supplied

Power Kits-See Page 5

CATALOG NO.	DESCRIPTION
BQFA01	15w Magnetic Plug In 12v Transformer, 120v Input
BQFA02	12v Battery w/ 10ft 18/2 Lead Wire & Battery Charger
BQFA03	FA05 Quick Connector & 20ft 18/2 Wire To Existing Voltage Systems -12v
BQFA04	9' Power Cord 18/3 SJTW & Plug - 120v



BQFD02L48SS

Mounts :



Deck (-FD)



**3" Clamp (-FC3)
5" Clamp (-FC5)**



Quick Connect (-QC)



Weighted Base (-WB)



BQFD03L48SS

FIXTURE: 316 stainless steel housing

ARM: 12" 316 stainless steel rigid stem with 16" stainless steel flex arm on top. Clear polyolefin shrink cover protection on flex arm.

LENS: High impact clear tempered flat glass

O-RING: High temperature red silicone

12v SOCKET: High temperature ceramic GU5.3 bi-pin with 250°C silicone lead wires

12v LED SUPPLIED: 7w MR16 Super Saver LED (L48); 40,000 hours, 36°, 550 lumens, 3000K

120v SOCKET: High temperature ceramic medium base with 250°C silicone lead wires

120v LED SUPPLIED: 7w, PAR16, medium base LED (L134), 40,000 hours, 36°, 550 lumens, 3000K

FINISH: Stainless Steel - brushed

ORDERING INFORMATION

CATALOG NO.	DESCRIPTION	KIT NEEDED
BQFD03L48SS	12v 316 Stainless Steel Flex Deck Mount BBQ Light	01, 02, 03
BQFC303L48SS	12v 316 Stainless Steel Flex 3" Clamp Mount BBQ Light	01, 02, 03
BQFC503L48SS	12v 316 Stainless Steel Flex 5" Clamp Mount BBQ Light	01, 02, 03
BQCC03L48SS	12v 316 Stainless Steel Quick Connect Mount BBQ Light	01, 03
BQFD03L134SS	120v 316 Stainless Steel Flex Deck Mount BBQ Light	04
BQFC303L134SS	120v 316 Stainless Steel Flex 3" Clamp Mount BBQ Light	Supplied
BQFC503L134SS	120v 316 Stainless Steel Flex 5" Clamp Mount BBQ Light	Supplied
BQWB03L134SS	120v 316 Stainless Steel Weighted Base BBQ Light	Supplied

Power Kits-See Page 5

CATALOG NO.	DESCRIPTION
BQFA01	15w Magnetic Plug In 12v Transformer, 120v Input
BQFA02	12v Battery w/ 10ft 18/2 Lead Wire & Battery Charger
BQFA03	FA05 Quick Connector & 20ft 18/2 Wire To Existing Voltage Systems -12v
BQFA04	9' Power Cord 18/3 SJTW & Plug - 120v



BQWB03L134SS

BQ-04 Series Barbecue Lights: 12v: Mini Round Back



Mounts :



Deck (-FD)



3" Clamp (-FC3)
5" Clamp (-FC5)



Quick Connect (-QC)



Weighted Base (-WB)

BQFD04L68SS

FIXTURE: Cast 316 stainless steel housing

ARM: 12" 316 stainless steel rigid stem with 16" stainless steel flex arm on top. Clear polyolefin shrink cover protection on flex arm.

LENS: High impact clear tempered flat glass

O-RING: High temperature red silicone

12v SOCKET: High temperature ceramic GU5.3 bi-pin with 250°C silicone lead wires

12v LED SUPPLIED: 3w MR11 Super Saver LED (-L68); 40,000 hours, 40°, 300 lumens, 3000K

FINISH: Stainless Steel - brushed



ORDERING INFORMATION

CATALOG NO.	DESCRIPTION	KIT NEEDED
BQFD04L68SS	12v, 316 Stainless Steel Flex Deck Mount BBQ Light	01,02,03
BQFC0304L68SS	12v, 316 Stainless Steel 3" Flex Clamp Mount BBQ Light	01,02,03
BQFC0504L68SS	12v, 316 Stainless Steel 5" Flex Clamp Mount BBQ Light	01,02,03
BQQC04L68SS	12v, 316 Stainless Steel Quick Connect Mount BBQ Light	01,03

Power Kits-See Page 5

CATALOG NO.	DESCRIPTION
BQFA01	15w Magnetic Plug In 12v Transformer, 120v Input
BQFA02	12v Battery w/ 10ft 18/2 Lead Wire & Battery Charger
BQFA03	FA05 Quick Connector & 20ft 18/2 Wire To Existing Voltage Systems -12v



BQFD04L68SS

COMMERCIAL DECK MOUNT / WEIGHTED BASE

TWIN COMMERCIAL DECK MOUNT



Power Supplies For 12v & 120v Barbecue Applications

#1 KIT

#2 KIT

#3 KIT

#4 KIT




1. BQFA01 15w Magnetic Plug In 12v Transformer w/ 10ft 18/2 Lead Wire, 120v Input


2. BQFA02 12v Battery w/ 10ft 18/2 Lead Wire & Battery Charger

3. BQFA03 FA05 Quick Connector & 20FT 18/2 Wire To Existing Voltage Systems -12v

4. BQFA04 9' Power Cord 18/3 SJTW & Plug - 120v

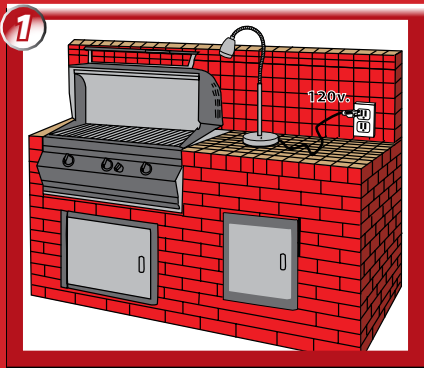


1: Plug 9' grounded powercord into weatherproof receptacle via power cord (supplied by Focus)

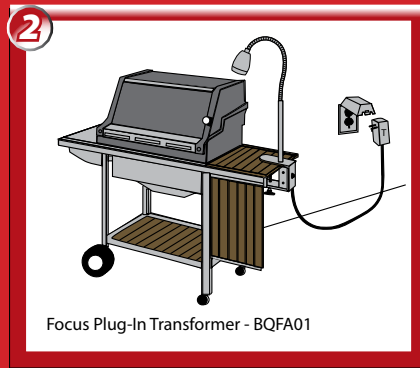


Focus Plug-In Transformer - BQFA01

2: Plug-in 12v transformer to 120v receptacle with 10' 18/2 SPT-1W black lead wire

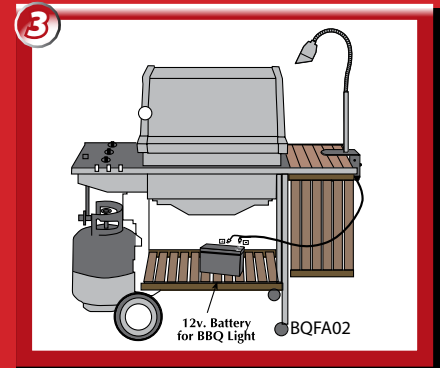


12v. Battery for BBQ Light BQFA02


3: Quick connect to 12v rechargeable/portable battery with 10' 18/2 SPT-1W black lead wire

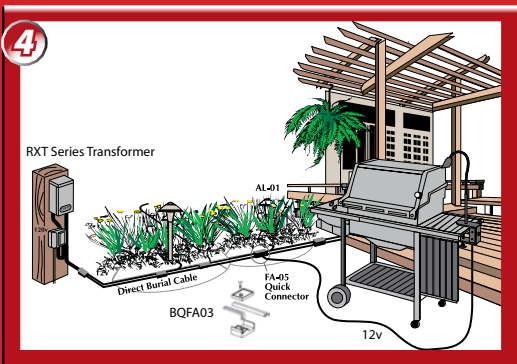

4: Direct connection to 12v. landscape lighting system with supplied FA-05 Quick Connector with 20' 18/2 SPT-1W black lead wire

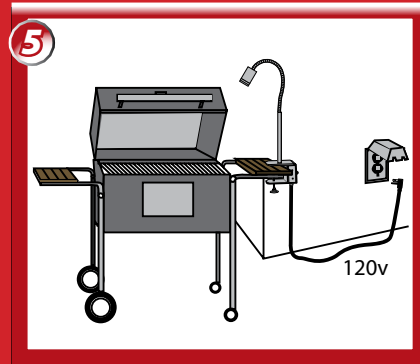

5: Plug 9' grounded powercord into weatherproof receptacle via power cord (supplied by Focus)

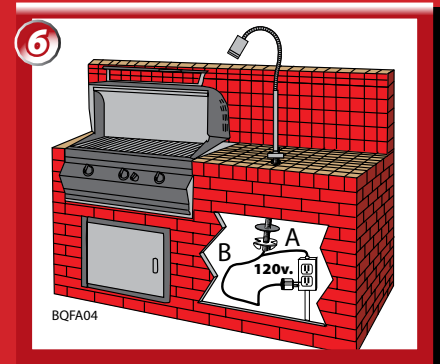

6: A: Hard wire directly into internal J-Box supplied within built in BBQ

B: If receptacle is present, attach a grounded mechanical plug and simply plug in



- FIXTURE:** 316 stainless steel housing
- COMMERCIAL STEM:** 24" tall 316 stainless steel rigid stem and 335° x 90° rotating swivel
- COMMERCIAL DOUBLE STEM:** Commercial grade 0.8" x 24" 316 stainless steel rigid stem and 1" x 2.5" bar on top with two 335° x 90° rotating swivels
- MOUNT:** Cast 316 stainless steel deck mount canopy or weighted base
- SWITCH:** On/Off push button with weatherproof rubber boot cover
- LENS:** High impact clear tempered flat glass
- O-RING:** High temperature red silicone
- 12v SOCKET:** High temperature ceramic GU5.3 bi-pin with 250°C silicone lead wires
- 12v LED SUPPLIED:** 7w MR16 Super Saver LED (L48); 40,000 hours, 36°, 550 lumens
- 120v SOCKET:** High temperature ceramic medium base with 250°C silicone lead wires
- 120v LED SUPPLIED:** 7w, PAR16, medium base LED (L134), 40,000 hours, 36°, 550 lumens
- FINISH:** Stainless Steel - Brushed



ORDERING INFORMATION

CATALOG NO.	DESCRIPTION	KIT NEEDED
BQCD01L48SS	12v, Commercial Deck Mount 316 SS BBQ Light	01,03
BQCD02L48SS	12v, Commercial Deck Mount 316 SS BBQ Light	01,03
BQCD03L48SS	12v, Commercial Deck Mount 316 SS BBQ Light	01,03
BQTC02L48SS	12v, Commercial Deck Mount 316 SS BBQ Light with Twin Heads	01,03
BQTC03L48SS	12v, Commercial Deck Mount 316 SS BBQ Light with Twin Heads	01,03
BQCD01L134SS	120v, Commercial Deck Mount 316 SS BBQ Light	04
BQCD02L134SS	120v, Commercial Deck Mount 316 SS BBQ Light	04
BQCD03L134SS	120v, Commercial Deck Mount 316 SS BBQ Light	04
BQCWB01L134SS	120v, Commercial Weighted Base 316 SS BBQ Light	Supplied
BQCWB02L134SS	120v, Commercial Weighted Base 316 SS BBQ Light	Supplied
BQCWB03L134SS	120v, Commercial Weighted Base 316 SS BBQ Light	Supplied
BQTC01L134SS	120v, Commercial Deck Mount 316 SS BBQ Light with Twin Heads	04
BQTC02L134SS	120v, Commercial Deck Mount 316 SS BBQ Light with Twin Heads	04
BQTC03L134SS	120v, Commercial Deck Mount 316 SS BBQ Light with Twin Heads	04

Power Kits-See Page 5

CATALOG NO.	DESCRIPTION
BQFA01	15w Magnetic Plug In 12v Transformer, 120v Input
BQFA03	FA05 Quick Connector & 20ft 18/2 Wire To Existing Voltage Systems - 12v
BQFA04	9' Power Cord 18/3 SJTW & Plug - 120v



BQCD01L134SS

UMBRELLA LIGHTS

- 3 fully adjustable mini bullets
- 3 MR8 Floodlights fully cover table top and / or umbrella canopy
- Supplied with 10' of black SPT-1W lead wire for easy connection to 12v source
- Adjustable
- "Quick Mount" to all standard size umbrellas
- Custom diameter umbrella pole sizes or 4", 6" or 8" diameter palapa poles available
- See power kit options on page 5



4.5w Total
Using
3x MR8 LED's



Model #	UL-03
Description	(3) 3.5" Laser Bullets
Material(s)	Aluminum, Brass or Copper with Brass Hardware
Lamp 12v	(3x) 1.5w MR8 LED (optional)
Mount	Mounts to Standard Umbrella Poles 1.25"-1.625" Ø

PORTABLE CLAMP



7 BQFC02L134SS


PORTABLE WEIGHTED BASE

**Portable Barbecue Light with Weighted Base.
No Drilling or Mounting Hardware Needed.**

- Cast stainless steel housing with angle cap on 12" 316 stainless steel rigid stem with 16" stainless steel flex arm on top.
- Mounted to 7", 6 lb. base for optimum stability
- Non skid rubber padding protects counter tops
- Grounded 9'- 120v power cord
- On/Off push button control with rubber boot cover
- 7w LED PAR16

Model #	BQWB02L134SS
Description	5" Bullet
Material(s)	Stainless Steel
Lamp 120v	7w, PAR16 LED
Mount	Portable Weighted Base

**NO INSTALLATION
PLUGS INTO ANY ELECTRICAL OUTLET**

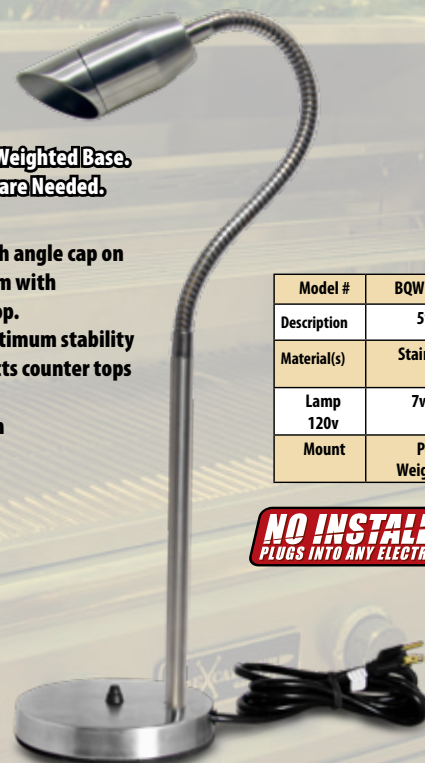

RESIDENTIAL GRADE STEP AND BRICK LIGHTS



SLO2L12CAR:
Aluminum, brass, copper or stainless steel
3w Omni LED



SLO23LL12BRS
3w Omni LED



SLO2LEDPBRS:
NO BACK BOX REQUIRED 12v Driver Supplied
Aluminum, brass, copper or stainless steel
12v 4w integrated flat panel LED
50,000 hours average rating
3000K warm white or 5200K cool white
External 12v AC driver required (supplied)



SLO4LEDPWBR
NO BACK BOX REQUIRED 12v Driver Supplied
Aluminum, brass, copper or stainless steel
12v 8w integrated flat panel LED
50,000 hours average rating
3000K warm white or 5200K cool white
External 12v AC driver required (supplied)



SLO4L12CAR:
Aluminum, brass, copper or stainless steel
2x 3w Omni LED



SLO43LL12BRS
2x 3w Omni LED



SLO2ALLEDPWBR:
NO BACK BOX REQUIRED 12v Driver Supplied
Aluminum, brass, copper or stainless steel
12v 4w integrated flat panel LED
50,000 hours average rating
3000K warm white or 5200K cool white
External 12v AC driver required (supplied)



SLO4ALLEDPWBR:
NO BACK BOX REQUIRED 12v Driver Supplied
Aluminum, brass, copper or stainless steel
12v 8w integrated flat panel LED
50,000 hours average rating
3000K warm white or 5200K cool white
External 12v AC driver required (supplied)



SLO2ALL12COP:
Aluminum, brass, copper or stainless steel
3w Omni LED



SLO21LL12SS:
Aluminum, brass, copper or stainless steel
3w Omni LED



SLO4ALL12BRS:
Aluminum, brass, copper or stainless steel
White acrylic lens
2x 3w Omni LED



SLO41LL12SS:
Aluminum, brass, copper or stainless steel
White acrylic lens
2x 3w Omni LED



SLO21LLEDPBLT :
NO BACK BOX REQUIRED 12v Driver Supplied
Aluminum, brass, copper or stainless steel
12v 4w integrated flat panel LED
50,000 hours average rating
3000K warm white or 5200K cool white
External 12v AC driver required (supplied)



SLO41LLEDPBRS:
NO BACK BOX REQUIRED 12v Driver Supplied
Aluminum, brass, copper or stainless steel
12v 8w integrated flat panel LED
50,000 hours average rating
3000K warm white or 5200K cool white
External 12v AC driver required (supplied)



SL60LED12BRS:
Aluminum, brass, or stainless steel
12v or 120v, 3w integrated LED Module
w/ integrated onboard driver
50,000 hours average rating
3000K warm white

go green
led solutions



SLO8LEDPBAR

RESIDENTIAL GRADE SURFACE, PAVER, PEDESTAL LIGHTS



SL35SML4BRS



SL35L8BAR



SL37PL2BRSWIR/SL37PMR16L24BRS



AL10LGPLEDPBAR



SL42SM2LEDSBRS



SL42L8BLT



SL43L8COP



SL42/43LGLEDSCOP



SL4444LEDWIR



SL44LEDSRST
SL4466LEDWBR/SL4469LEDWBR



SL07L8SS



SL07SML4WTX

Catalog #	Height (H)	Width (W)	Depth (D)	Standard Material	Optional Material(s)	LED Supplied
AL-10-LGPLEDP	9.00"	12.00"	8.00"	solid brass w/ glass panels	—	4w LED Panel
SL-02 ²	3.00"	4.75"	2.00"	stamped aluminum	brass, copper, stainless steel	OMNI-3 SS LED
SL-02-1L ²	3.00"	4.75"	2.00"	stamped aluminum	brass, copper, stainless steel	OMNI-3 SS LED
SL-02-3L ²	2.25"	4.50"	2.00"	stamped aluminum	brass, copper, stainless steel	OMNI-3 SS LED
SL-02-AL ²	3.00"	4.75"	2.00"	stamped aluminum	brass, copper, stainless steel	OMNI-3 SS LED
SL-04 ²	3.00"	9.25"	3.00"	stamped aluminum	brass, copper, stainless steel	2 x OMNI-3 SS LED
SL-04-1L ²	3.00"	9.25"	3.00"	stamped aluminum	brass, copper, stainless steel	2 x OMNI-3 SS LED
SL-04-3L	2.25"	9.25"	3.00"	stamped aluminum	brass, copper, stainless steel	2 x OMNI-3 SS LED
SL-04-AL ²	3.00"	9.00"	3.00"	stamped aluminum	brass, copper, stainless steel	2 x OMNI-3 SS LED
SL-07-SML4	2.75" diameter	1.50"	1.50"	cast aluminum	cast brass	G4 Mini BP LED
SL-07-SMLEDM	2.75" diameter	1.50"	1.50"	cast aluminum	cast brass	3w LED Module
SL-07	3.75" diameter	2.00"	2.00"	cast aluminum	cast brass, stainless steel	OMNI-3 SS LED
SL-08 ²	3.25"	8.25"	2.75"	cast aluminum	cast brass	2 x OMNI-3 SS LED
SL-08-AL ²	3.25"	8.25"	2.75"	cast aluminum	cast brass	2 x OMNI-3 SS LED
SL-17 ²	3.25"	5.20"	2.75"	cast aluminum	cast brass	OMNI-3 SS LED
SL-17-AL ²	3.25"	5.20"	2.75"	cast aluminum	cast brass	OMNI-3 SS LED
SL-17-AL-MR16	3.25"	5.20"	2.75"	cast aluminum	cast brass	3w MR16 LED
SL-18 ¹	2.50"	3.50"	2.25"	cast aluminum	cast brass	OMNI-3 SS LED
SL-24	5.00" diameter	3.25"	3.25"	cast aluminum	cast brass	OMNI-3 SS LED
SL-30 ²	3.25"	5.20"	2.75"	cast aluminum	cast brass	OMNI-3 SS LED
SL-31 ²	3.25"	8.20"	2.75"	cast aluminum	cast brass	2 x OMNI-3 SS LED
SL-35	3.50"	2.50"	2.50"	cast aluminum	—	OMNI-3 SS LED
SL-35-SML4	3.00"	2.125"	2.125"	brass	—	G4 Mini LED BP
SL-37-P	2.25"	2.00"	—	brass	—	1.5w G4 LED
SL-37-PMR16L24	3.25"	3.00"	—	brass	—	3w MR16 LED
SL-42 ¹	1.00"	5.00"	3.00"	stamped aluminum	brass, copper, stainless steel	OMNI-3 SS LED
SL-42-SM2-LEDS	.50"	5.00"	2.00"	stamped aluminum	brass, copper, stainless steel	2w LED Strip
SL-42-LG-LEDS	.50"	13.00"	2.00"	stamped aluminum	brass, copper, stainless steel	4w LED Strip
SL-43 ¹	1.00"	5.00"	1.50"	stamped aluminum	brass, copper, stainless steel	OMNI-3 SS LED
SL-43-SM2-LEDS	.50"	5.00"	.50"	stamped aluminum	brass, copper, stainless steel	2w LED Strip
SL-43-LG-LEDS	.50"	13.00"	2.00"	stamped aluminum	brass, copper, stainless steel	4w LED Strip
SL-44-LEDS	4.00"	8.00"	2.25"	stamped aluminum	brass, copper, stainless steel	2w LED Strip
SL-44-44-LEDS	4.00"	4.00"	2.25"	stamped aluminum	brass, copper, stainless steel	2w LED Strip
SL-44-66-LEDS	6.00"	6.00"	2.25"	stamped aluminum	brass, copper, stainless steel	2w LED Strip
SL-44-69-LEDS	6.00"	9.00"	2.25"	stamped aluminum	brass, copper, stainless steel	2w LED Strip
SL-60	3.00"	5.00"	1.50"	cast aluminum	brass, stainless steel	3w LED Module

¹ For 2w LED Strip add -LEDS to catalog number | ² For No Backbox LED Panel Steplights add -LEDP to catalog number

RESIDENTIAL GRADE STEP AND SURFACE LIGHTS



SL08L12BAR:
Cast aluminum or brass
2x 3w Omni LED



SL08ALL12BRS:
Cast aluminum or brass
White acrylic lens
2x 3w Omni LED



SL08LEDPBAR:
NO BACK BOX REQUIRED 12v Driver Supplied
Cast aluminum or brass
12v 8w integrated flat panel LED
50,000 hours average rating
3000K warm white or 5200K cool white
External 12v AC driver required (supplied)



SL08ALLEDPBAR:
NO BACK BOX REQUIRED 12v Driver Supplied
Cast aluminum or brass
12v 8w integrated flat panel LED
50,000 hours average rating
3000K warm white or 5200K cool white
External 12v AC driver required (supplied)



SL17L12BAV:
Cast aluminum or brass
3w Omni LED SS



SL17ALL12BAR:
Cast aluminum or brass
White acrylic lens
3w Omni LED SS



SL17LEDPBLT:
NO BACK BOX REQUIRED 12v Driver Supplied
Cast aluminum or brass
12v 4w integrated flat panel LED
50,000 hours average rating
3000K warm white or 5200K cool white
External 12v AC driver required (supplied)



SL17ALLEDPWBR:
NO BACK BOX REQUIRED 12v Driver Supplied
Cast aluminum or brass
12v 4w integrated flat panel LED
50,000 hours average rating
3000K warm white or 5200K cool white
External 12v AC driver required (supplied)



SL30L12BRS:
Cast aluminum or brass
3w Omni LED SS



SL31L12BAR:
Cast aluminum or brass
2x 3w Omni LED SS



SL30LEDPBAR:
NO BACK BOX REQUIRED 12v Driver Supplied
Cast aluminum or brass
12v 4w integrated flat panel LED
50,000 hours average rating
3000K warm white or 5200K cool white
External 12v AC driver required (supplied)



SL31LEDPBRT:
NO BACK BOX REQUIRED 12v Driver Supplied
Cast aluminum or brass
12v 8w integrated flat panel LED
50,000 hours average rating
3000K warm white or 5200K cool white
External 12v AC driver required (supplied)




SL24L12BAV:
Cast aluminum or brass
3w Omni LED SS



SL18L12BAV:
Cast aluminum or brass
3w Omni LED SS



SL50LEDPACM:
NO BACK BOX REQUIRED 12v Driver Supplied
Cast aluminum or brass
12v 5w integrated flat panel LED
50,000 hours average rating
3000K warm white or 5200K cool white
External 12v AC driver required (supplied)

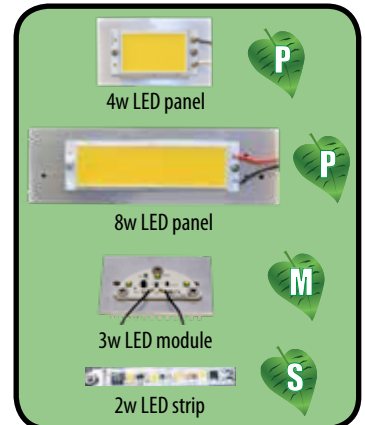



DECK MOUNT

BQFD03L134SS



3" or 5" CLAMP

BQFC0304L68SS



QUICK CONNECT

BQQC02L48SS



WEIGHTED BASE

BQCWB01L134SS

Accessories

FLLEDMR16S57W36
BQ01/02/03 (12v)



12v, 7w, 40,000 hour
MR16 LED (L48)
36", 550 lumens, 3000K

FLLEDP1636
BQ01/02/03 (120v)



120v, 7w, 40,000 hour
PAR16 LED (L134)
36", 550 lumens, 3000K

FLLEDMR11SS3W40
BQ04



12v, 3w, 40,000 hour
MR11 LED (L68)
40", 300 lumens, 3000K

go green
led solutions

All Focus Barbecue Lights

Ship With Long Life LED Light Sources



Optional Barbecue
Light Fixture Protective Nylon-
Cover Shields Your Barbecue
Light From The Elements
Works With All Focus Flex Arm
Barbecue Lights.

FABQCOVER

★ FOCUS INDUSTRIES, INC.®

World Headquarters • 25301 Commercentre Drive, Lake Forest, CA 92630
Phone: (949) 830-1350 • Toll Free: (888) 882-1350 • E-Mail: sales@focusindustries.com
www.focusindustries.com



Member of



REGIONAL DISTRIBUTION CENTER

PENNSYLVANIA: 11500 Roosevelt Blvd., Unit G-1, Philadelphia, PA 19116
FLORIDA: 6913 NW 52nd St., Miami FL 33166

Ph. (215) 677-6870 • Toll Free (800) 468-0801 • Fax (215) 677-1261 • sales@associatedmarketing.net
Ph. (305) 592-3262 • Fax (305) 592-3403 • frank@clsighting.com

FSA-71 \$4.00 092418