



STEP LIGHTS SL-24 SERIES

SPECIFICATIONS

BACK BOX HOUSING: Heavy duty stamped aluminum with eight 1/2" knockouts, white finish

FRONT COVER: Cast aluminum

LENS: White high impact acrylic, linear spread glass for SL-24-MR16

GASKET: Black neosponge 0.190" thick closed cell

REFLECTOR: Highly polished specular aluminum

LAMP-SL-24, SL-24-BRS: 18 watt S-8 #1141 (35 watt max.)

SL-24-MR16, SL-24-MR16-BRS: 20 watt MR16 (BAB), (35 watt max.)

SOCKET: Single contact bayonet base (Ba15s)-brass nickel plated screw shell and spring (12v.); bi-pin GU5.3 MR16 ceramic with 250° C lead wires (12v.)

LAMP LIFE: 1200 hours average rating for S-8 #1141, 5000 hours average rating for MR16

WIRING: Black 5 foot 18/2 zip cord (12v. only)

CONNECTION: FA-05 Quick Connector (not supplied) from fixture to main cable (12/2, 10/2 or 8/2 only)


FINISH: Optional finishes available



SL-24


ORDERING INFORMATION

CATALOG NO.	DESCRIPTION
SL-24	Cast aluminum step eyebrow
SL-24-BRS	Cast brass step eyebrow
SL-24-MR16	Cast aluminum step eyebrow
SL-24-MR16-BRS	Cast brass step eyebrow

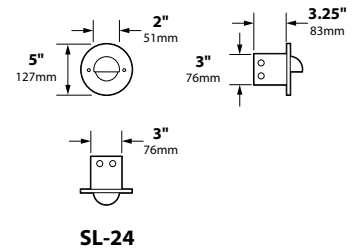

SL-24

LIGHT DISTRIBUTIONS AND PHOTOMETRICS

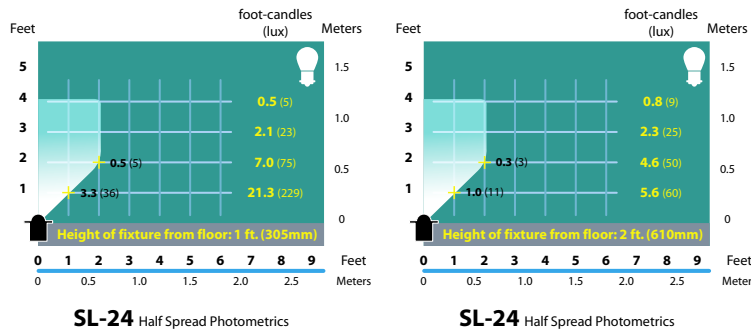

JOB INFORMATION

Type: _____ Date: _____

Job Name: _____

Cat. No.: _____

Lamp(s): _____

Specifier: _____

Contractor: _____

Notes: _____

FOCUS INDUSTRIES INC.
25301 COMMERCENTRE DRIVE
LAKE FOREST, CA 92630

www.focusindustries.com
sales@focusindustries.com
(949) 830-1350 • FAX (949) 830-3390

FSA-00

Powder Coat Finishes	Black Texture (Standard)	Antique Verde	Bronze Texture	Camel	White Texture	Hunter Texture	Rust	Weathered Iron	Weathered Brown	Stucco	Rubbed Verde	Chrome Powder	Terra Cotta
Ordering Code	-BLT	-ATV	-BRT	-CAM	-WTX	-HTX	-RST	-WIR	-WBR	-STU	-RBV	-CPR	-TRC



FOCUS™
INDUSTRIES

INSTALLATION INSTRUCTIONS
FOR SL-02, SL-04, SL-08, SL-17, SL-24, SL-30 & SL-31
STEP AND BRICK LIGHT FIXTURES

Inspected by

1. Make sure light bulbs do not make contact with front lens plate.
2. Push back reflector, socket and lamp assembly from front lens as far back into housing.
3. If light bulbs are making contact with lens or are extremely close to it, lens will deform or melt.
4. All 12v models include one 3' 18/2 wire. 120v models only include socket wires and a ground wire.

NOTE: Must be installed by a licensed electrician per local codes
For Questions Call 1-888-882-1350