

## DESCRIPTION

The All-Glass Low-Profile Curve is an all-glass "dead-front" shower light with a clear downlight center, and frost perimeter. The trim features die-cast aluminum inner construction for high-quality fit. All-Glass Curve uses MR16 low voltage or GU10 line voltage lamps ideal for accent and task lighting. Trim offers 360° orientation within housing.

Catalog #		Type
Project		
Comments		Date
Prepared by		

## SPECIFICATION FEATURES

All-Glass Curve features in Frost decorative glass with a clear downlight center. Three pressure springs ensure positive retention in housing.

3017 is designed for use with the following Halo H3 small aperture housings:


- Line Voltage Housing (for 120V GU10 lamps).
 

H36ICAT	50W	IC Air-Tite Housing
H36TAT	50W	Non-IC Air-Tite Housing
H36RTAT	50W	Non-IC Air-Tite Remodel Housing
- Low Voltage Housing (for 12V MR16 lamps).
 

H36LVICAT	50W	IC Air-Tite Housing
H36LVTAT	50W	Non-IC Air-Tite Housing
H36LVRTAT	50W	Non-IC Air-Tite Remodel Housing
H36LVTAT277	50W	Non-IC Air-Tite Housing, 120/277V
H36LVRTAT277	50W	Non-IC Air-Tite Remodel Housing, 120/277V
- Line Voltage Housing (for 120V GU10 lamps).
 

H38ICAT	50W	IC Air-Tite Housing
---------	-----	---------------------
- Low Voltage Housing (for 12V MR16 lamps).
 

H38LVICAT	50W	IC Air-Tite Housing
-----------	-----	---------------------

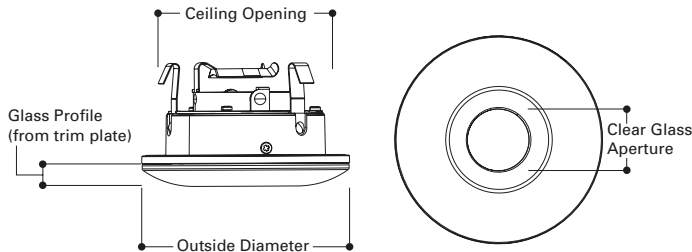

Clear Glass Aperture: 1-1/2" [38mm]  
 Glass Profile (from trim plate): 5/16" [8mm]  
 Ceiling Opening: 3-3/4" [95mm]  
 Outside Diameter: 4-1/4" [108mm]



**3017FGS**  
Frost Glass Shower Light Curve

**3017**

**3" All-Glass Low-Profile  
Frost Curve Showerlight  
Trim**



3" TRIM

## ORDERING INFORMATION

### SAMPLE NUMBER: 3017FGS

Order housing and trims separately.

Trim	Finish
<b>3017</b> = 3" Adjustable Gimbal Square Trim	<b>FGS</b> =Frost Glass Shower Light Curve